




# OIL ANALYSIS REPORT

Area  
**MINING**  
Machine Id  
**ME-61 CATERPILLAR 980M MK700210**  
Component  
**Diesel Engine**  
Fluid  
**CAT DEO ULS 15W40 (10 GAL)**

Sample Rating Trend

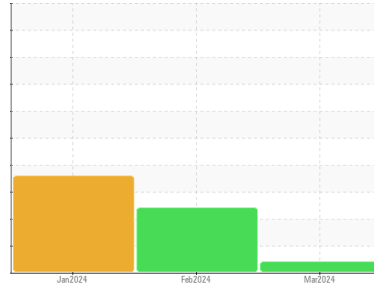

## VISCOSITY



### DIAGNOSIS

#### Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0909672</b>	WC0909659	WC0880663
Sample Date	Client Info		<b>28 Mar 2024</b>	28 Feb 2024	11 Jan 2024
Machine Age	hrs	Client Info	<b>11312</b>	10782	10185
Oil Age	hrs	Client Info	<b>500</b>	500	500
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>ATTENTION</b>	ATTENTION	ABNORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	<b>25</b>	39	42
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	2	2
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	4	3
Lead	ppm	ASTM D5185m	>40	<b>1</b>	2	3
Copper	ppm	ASTM D5185m	>330	<b>3</b>	5	3
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>27</b>	21	15
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>42</b>	72	88
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>440</b>	488	445
Calcium	ppm	ASTM D5185m		<b>1644</b>	1542	1698
Phosphorus	ppm	ASTM D5185m	1000	<b>879</b>	935	871
Zinc	ppm	ASTM D5185m	1090	<b>1052</b>	1094	1056
Sulfur	ppm	ASTM D5185m	3000	<b>2976</b>	2997	2522

### CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<b>9</b>	6	10
Sodium	ppm	ASTM D5185m		<b>29</b>	207	341
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	17	26
Fuel	%	ASTM D3524	>5	<b>&lt;1.0</b>	3.3	2.9

### INFRA-RED





	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.7	0.7
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.8</b>	10.9	11.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.6</b>	24.0	23.6

### FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.7</b>	23.0	23.3
Base Number (BN)	mg KOH/g	ASTM D2896	10.4	<b>9.4</b>	8.2	8.5







# OIL ANALYSIS REPORT

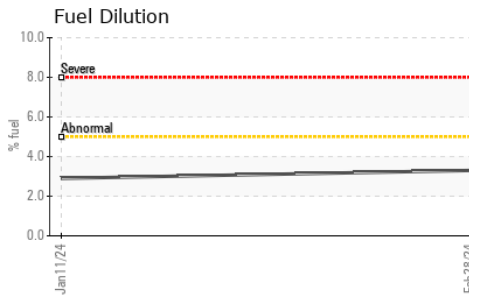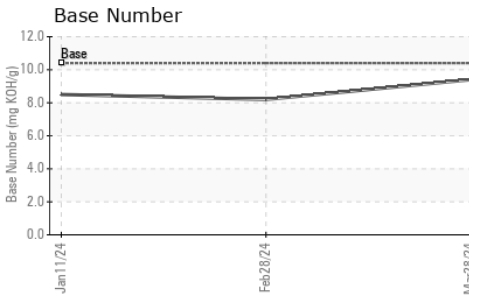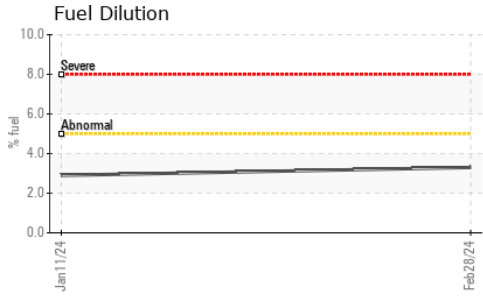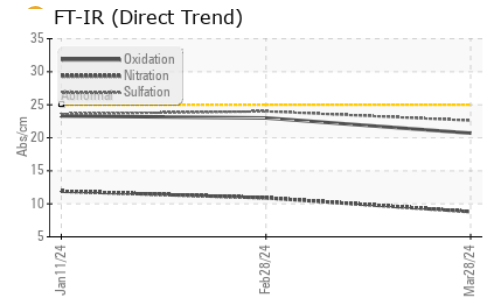

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.0	● 11.4	● 11.1	● 11.9

### GRAPHS

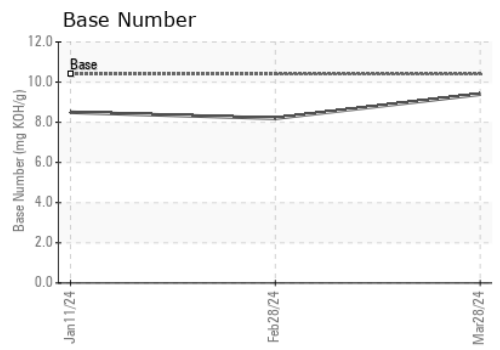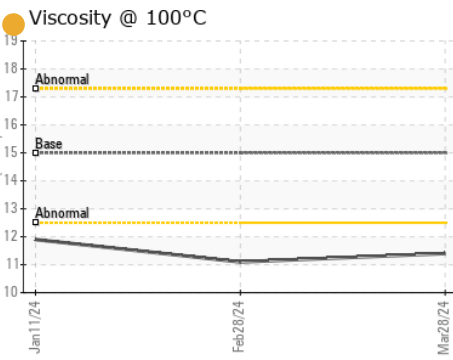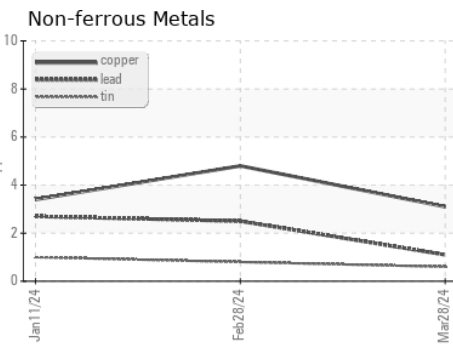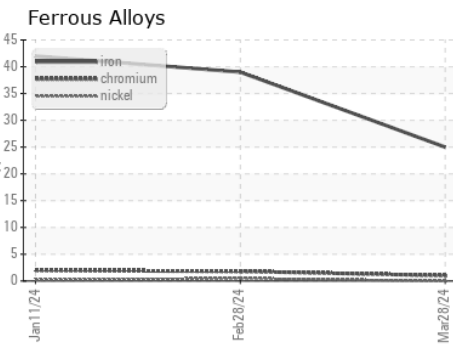

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0909672      **Received** : 04 Apr 2024  
**Lab Number** : 06138279      **Tested** : 09 Apr 2024  
**Unique Number** : 10963087      **Diagnosed** : 09 Apr 2024 - Jonathan Hester  
**Test Package** : CONST ( Additional Tests: FuelDilution, PercentFuel, TBN )

**COVIA - CAMDEN - 094**  
 1700 SAND MILL RD  
 CAMDEN, TN  
 US 38320  
 Contact: TRACY KEE  
 tracy.kee@coviacorp.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)