




# OIL ANALYSIS REPORT

Area  
**MINING**  
Machine Id  
**ME-61 CATERPILLAR 980M MK700210**  
Component  
**Hydraulic System**  
Fluid  
**CAT HYDO (43 GAL)**

Sample Rating Trend

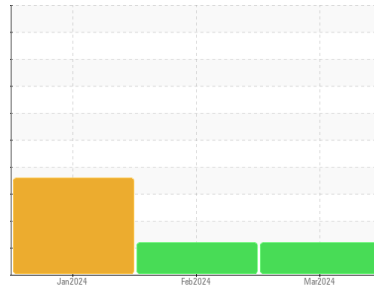

**WEAR**



## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

### Wear

All component wear rates are normal.

### Contamination

Moderate concentration of visible dirt/debris present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0909670</b>	WC0909663	WC0880665
Sample Date	Client Info		<b>28 Mar 2024</b>	28 Feb 2024	11 Jan 2024
Machine Age	hrs	Client Info	<b>11312</b>	10782	10185
Oil Age	hrs	Client Info	<b>1000</b>	500	2000
Oil Changed	Client Info		<b>N/A</b>	Not Changd	Changed
Sample Status			<b>ABNORMAL</b>	ATTENTION	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>10</b>	7	12
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m >10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >10	<b>▲ 13</b>	11	● 17
Lead	ppm	ASTM D5185m >10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >75	<b>1</b>	<1	1
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>2</b>	1	2
Manganese	ppm	ASTM D5185m	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m	<b>11</b>	5	16
Calcium	ppm	ASTM D5185m	<b>198</b>	206	216
Phosphorus	ppm	ASTM D5185m 1100	<b>640</b>	742	735
Zinc	ppm	ASTM D5185m 1210	<b>865</b>	863	924
Sulfur	ppm	ASTM D5185m	<b>1623</b>	1702	1896

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>18</b>	13	▲ 21
Sodium	ppm	ASTM D5185m	<b>0</b>	2	0
Potassium	ppm	ASTM D5185m >20	<b>1</b>	<1	2

## FLUID CLEANLINESS




	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	---	● 5431	▲ 16040
Particles >6µm	ASTM D7647	>1300	---	● 1486	● 2219
Particles >14µm	ASTM D7647	>160	---	91	136
Particles >21µm	ASTM D7647	>40	---	23	28
Particles >38µm	ASTM D7647	>10	---	1	1
Particles >71µm	ASTM D7647	>3	---	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	---	● 20/18/14	▲ 21/18/14

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.68</b>	0.84	0.91




# OIL ANALYSIS REPORT

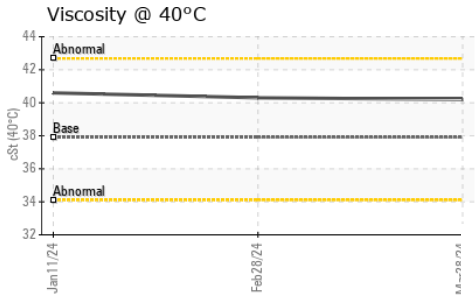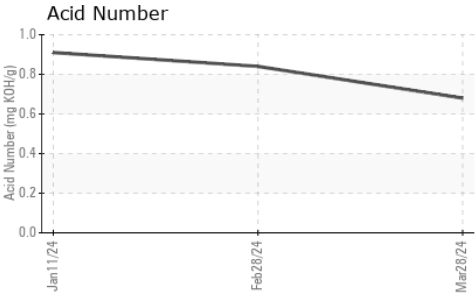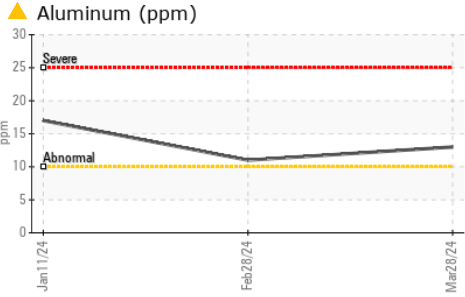





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	▲ MODER	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	37.9	40.2	40.3

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

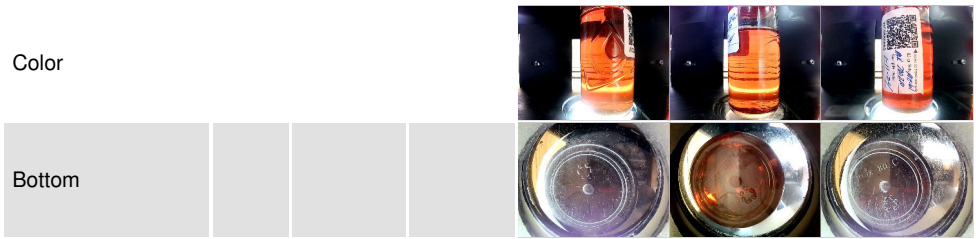

## GRAPHS

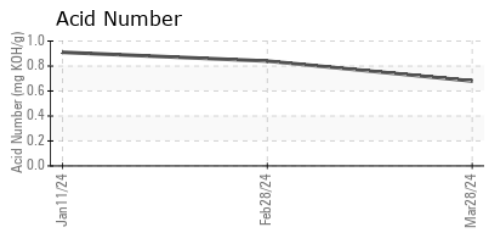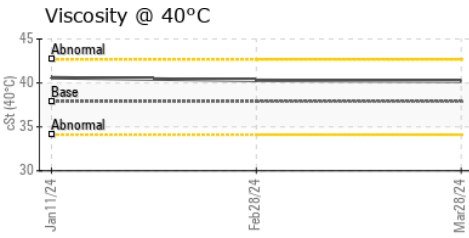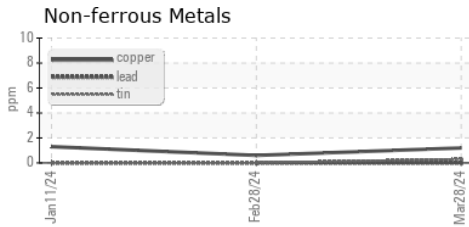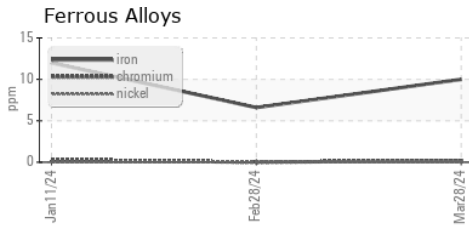

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0909670      **Received** : 04 Apr 2024  
**Lab Number** : 06138492      **Tested** : 06 Apr 2024  
**Unique Number** : 10963300      **Diagnosed** : 06 Apr 2024 - Don Baldrige  
**Test Package** : CONST

**COVIA - CAMDEN - 094**  
 1700 SAND MILL RD  
 CAMDEN, TN  
 US 38320  
 Contact: TRACY KEE  
 tracy.kee@coviacorp.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)