


# **OIL ANALYSIS REPORT**

# **COOLING TOWER PUMP MOTORS** P-752-UPPER

Component Bearing

**MOBIL SHC 626 (9 QTS)** 





### Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


### **Fluid Condition**


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0919961	WC0866657	WC0835520
Sample Date		Client Info		02 Apr 2024	11 Oct 2023	06 Jul 2023
Machine Age	mths	Client Info		0	0	0
Oil Age	mths	Client Info		0	2	10
Oil Changed		Client Info		N/A	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>2	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<1	0	0
Chromium	ppm	ASTM D5185m	>20	<1	0	0
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	0	<1
Lead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m	>20	<1	0	0
Tin	ppm	ASTM D5185m	>20	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		<1	0	3
Calcium	ppm	ASTM D5185m		4	0	0
Phosphorus	ppm	ASTM D5185m		447	482	471
Zinc	ppm	ASTM D5185m		0	0	8
Sulfur	ppm	ASTM D5185m		0	9	0
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	0	2
Sodium	ppm	ASTM D5185m		0	<1	<1
Potassium	ppm	ASTM D5185m	>20	<1	0	0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	6077	3863	
Particles >6µm		ASTM D7647	>2500	1274	1145	
Particles >14μm		ASTM D7647	>160	38	79	
Particles >21µm		ASTM D7647		7	24	
Particles >38μm		ASTM D7647	>10	1	1	
Particles >71μm		ASTM D7647		0	0	
		100 4400 (-)	. 00/10/14		10/17/10	
Oil Cleanliness		ISO 4406 (c)	>20/18/14	20/17/12	19/17/13	
Oil Cleanliness FLUID DEGRADA	ATION	method	limit/base	20/17/12 current	history1	history2




## **OIL ANALYSIS REPORT**

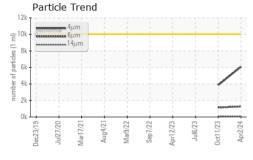







VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
<b>Emulsified Water</b>	scalar	*Visual	>2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	TIES	method	limit/hase	current	history1	history2


/isc @ 40°C	67.7

Color

SAMPLE IMAGES





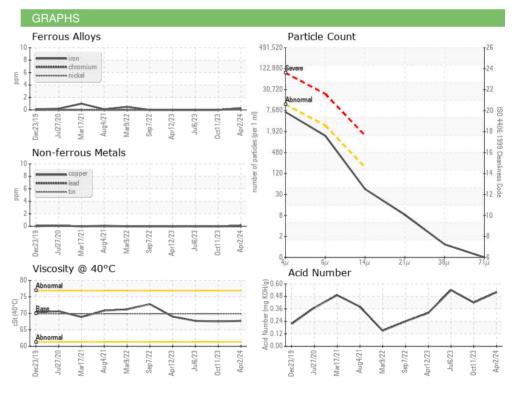





Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : WC0919961 Lab Number : 06138516 Unique Number : 10963324

Received **Tested** 

: 04 Apr 2024 : 05 Apr 2024

Diagnosed : 06 Apr 2024 - Don Baldridge

Test Package : IND 2 ( Additional Tests: PrtCount ) Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**POET BIOREFINING - Groton** 

40425 133RD STREET GROTON, SD US 57445-6400

Contact: GAVIN KRUEGER Gavin.Krueger@POET.COM

T: 6(05)846-6863

F: (605)397-2754