




# OIL ANALYSIS REPORT

Sample Rating Trend

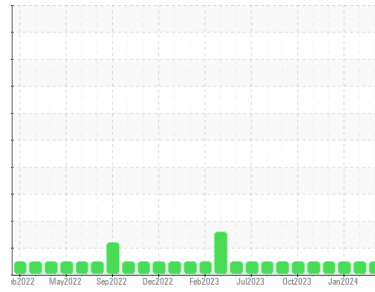

**NORMAL**



Machine Id  
**HARRIS**  
 Component  
**Hydraulic System**  
 Fluid  
**GULF HYD 46 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0860337</b>	WC0860341	WC0860343
Sample Date	Client Info			<b>29 Mar 2024</b>	29 Feb 2024	31 Jan 2024
Machine Age	hrs	Client Info		<b>26717</b>	26563	26357
Oil Age	hrs	Client Info		<b>26717</b>	26563	26357
Oil Changed	Client Info			<b>Not Chngd</b>	Not Chngd	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<b>7</b>	9	8
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>0</b>	2	<1
Lead	ppm	ASTM D5185m	>10	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m	>75	<b>16</b>	16	16
Tin	ppm	ASTM D5185m	>10	<b>0</b>	<1	2
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	<1	2
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m		<b>4</b>	6	6
Calcium	ppm	ASTM D5185m		<b>392</b>	377	387
Phosphorus	ppm	ASTM D5185m		<b>343</b>	343	355
Zinc	ppm	ASTM D5185m		<b>446</b>	456	447
Sulfur	ppm	ASTM D5185m		<b>1934</b>	1821	1764





CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>2</b>	3	4
Sodium	ppm	ASTM D5185m		<b>2</b>	0	1
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	0

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>1544</b>	3277	931
Particles >6µm		ASTM D7647	>1300	<b>196</b>	586	357
Particles >14µm		ASTM D7647	>160	<b>10</b>	23	56
Particles >21µm		ASTM D7647	>40	<b>4</b>	6	21
Particles >38µm		ASTM D7647	>10	<b>1</b>	0	2
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>18/15/10</b>	19/16/12	17/16/13

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.41</b>	0.41	0.38




# OIL ANALYSIS REPORT

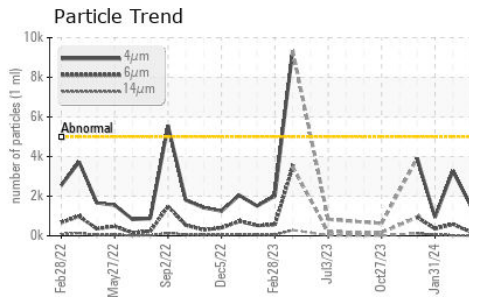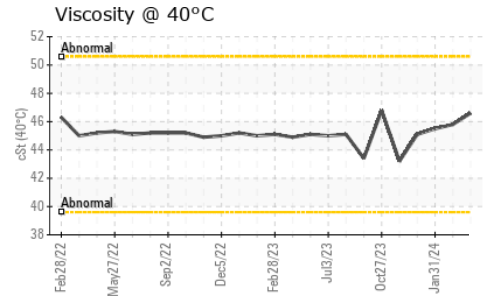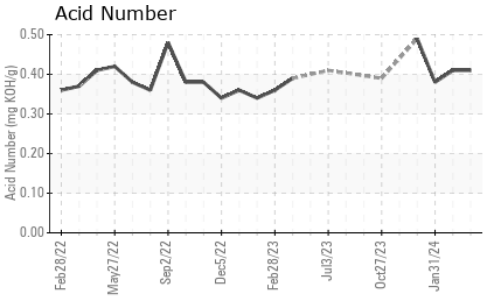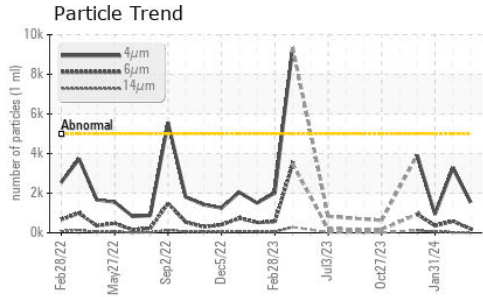






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	<b>46.6</b>	45.8	45.5

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image



## GRAPHS

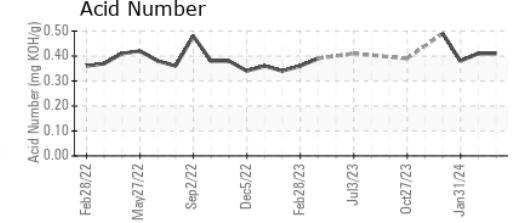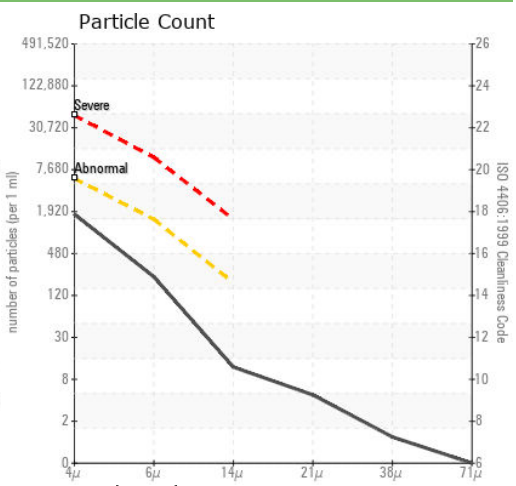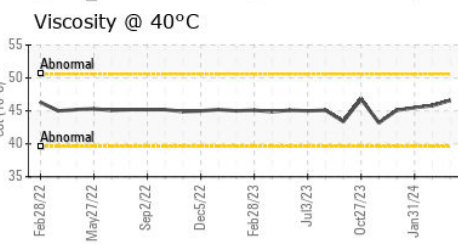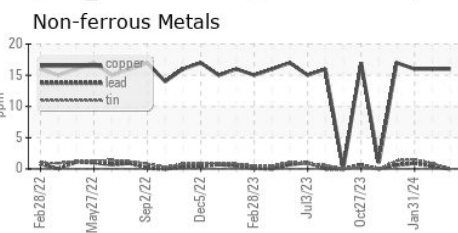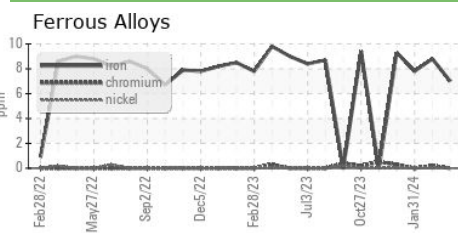

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0860337  
**Lab Number** : 06138709  
**Unique Number** : 10963517  
**Test Package** : MOB 2  
**Received** : 04 Apr 2024  
**Tested** : 10 Apr 2024  
**Diagnosed** : 10 Apr 2024 - Wes Davis

**ONEIDA HERKIMER SOLID WASTE**  
 80 LELAND AVENUE  
 UTICA, NY  
 US 13502  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)