




# OIL ANALYSIS REPORT



Machine Id  
**HBKM01BE**  
 Component  
**Biogas Engine**  
 Fluid  
**SHELL MYSELLA S5 S (--- GAL)**

Sample Rating Trend

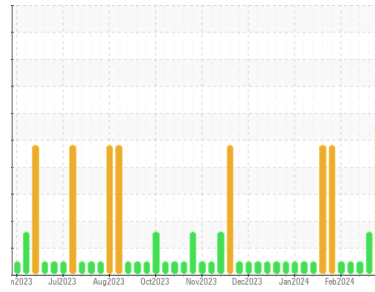

**DIRT**



## DIAGNOSIS

### ▲ Recommendation

We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition. ( Customer Sample Comment: Top Up Amount: 30 GAL )

### ▲ Wear

The tin level is abnormal.

### ▲ Contamination

Elemental level of silicon (Si) above normal.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0775502</b>	WC0775498	WC0775495
Sample Date	Client Info		<b>02 Apr 2024</b>	26 Mar 2024	15 Mar 2024
Machine Age	hrs	Client Info	<b>109229</b>	109078	108815
Oil Age	hrs	Client Info	<b>803</b>	628	389
Oil Changed	Client Info		<b>Oil Added</b>	Oil Added	Oil Added
Sample Status			<b>SEVERE</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method		<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >14	<b>5</b>	4	4
Chromium	ppm	ASTM D5185m >3	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >5	<b>4</b>	3	3
Lead	ppm	ASTM D5185m >8	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m >5	<b>2</b>	2	2
Tin	ppm	ASTM D5185m >3	<b>▲ 4</b>	3	4
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>6</b>	5	6
Barium	ppm	ASTM D5185m	<b>0</b>	0	1
Molybdenum	ppm	ASTM D5185m	<b>4</b>	4	4
Manganese	ppm	ASTM D5185m	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m	<b>18</b>	15	16
Calcium	ppm	ASTM D5185m	<b>1591</b>	1481	1570
Phosphorus	ppm	ASTM D5185m 300	<b>303</b>	302	328
Zinc	ppm	ASTM D5185m	<b>430</b>	397	438
Sulfur	ppm	ASTM D5185m	<b>3446</b>	3315	3503

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >180	<b>▲ 230</b>	▲ 199	158
Sodium	ppm	ASTM D5185m >20	<b>5</b>	6	3
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0	2

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0</b>	0	0
Nitration	Abs/cm	*ASTM D7624	<b>4.9</b>	4.8	4.4
Sulfation	Abs/.1mm	*ASTM D7415	<b>21.7</b>	21.0	19.7


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	<b>14.7</b>	14.1	12.6
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>1.25</b>	1.17	1.483
Base Number (BN)	mg KOH/g	ASTM D2896 5.3	<b>2.82</b>	3.59	3.55




# OIL ANALYSIS REPORT


## Non-ferrous Metals

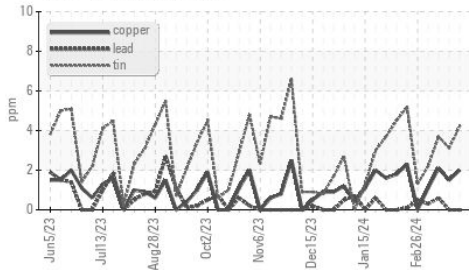


## FT-IR (Direct Trend)

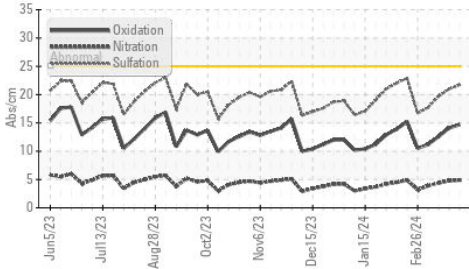


## Acid Number

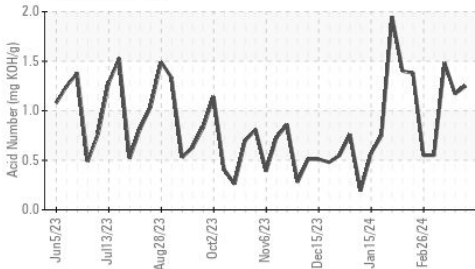

## Acid Number

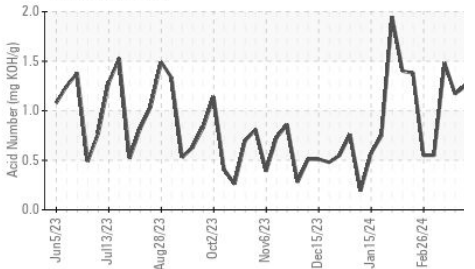









## Base Number

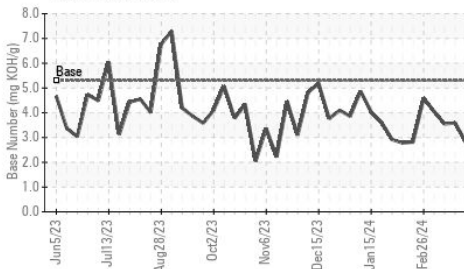

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.5	13.6	13.5

## GRAPHS

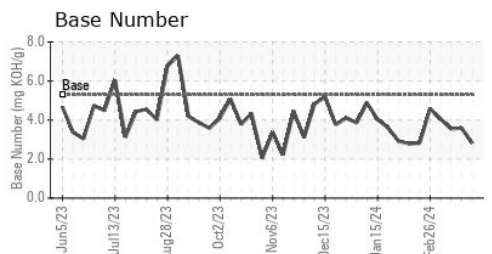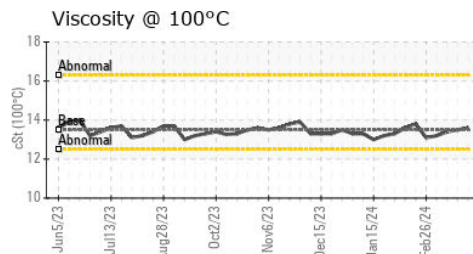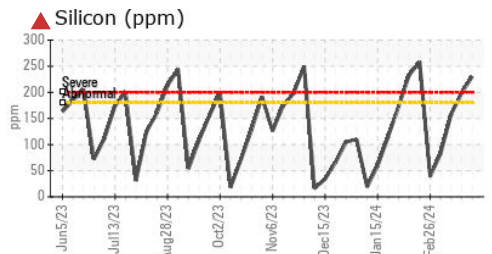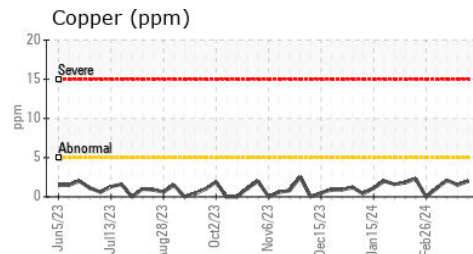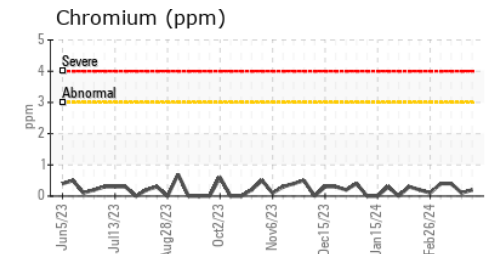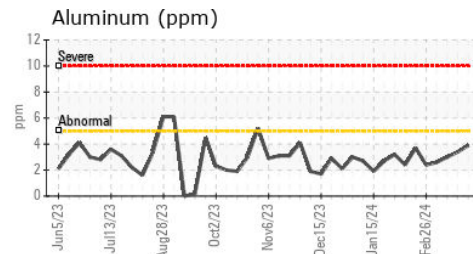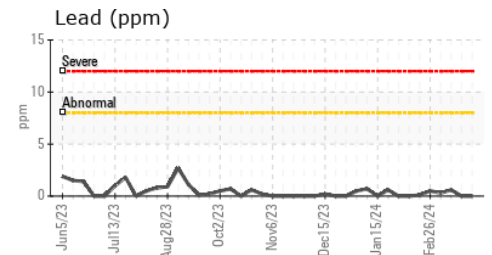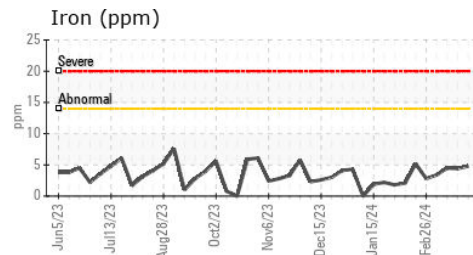

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0775502  
**Lab Number** : 06138717  
**Unique Number** : 10963525  
**Test Package** : MOB 2

**EDL NA Recips-Honeybrook**  
 Honey Brook Powerstation, 481 S. Churchtown Road  
 Narvon, PA  
 US 17555-9574  
 Contact: Christian Adames  
 Christian.Adames@edlenergy.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: