

FUEL REPORT

Sample Rating Trend

NORMAL

Area **QTS** Miami [6959] [QTS Miami] TANK 2

Diesel Fuel

Fluid No.2 DIESEL FUEL (ULTRALOW SULPHUR) (20000 GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. All laboratory tests indicate that this sample meets specifications for No.2 low-sulfur diesel fuel.

Corrosion

All metal levels are normal indicating no corrosion in the system.

Contaminants

The water content is negligible. There is no bacteria or fungus (yeast and/or mold) indicated in the sample. There is no indication of any contamination in the fuel. The amount and size of particulates present in the system are acceptable.


Fuel Condition

Sulfur value derived by ASTM D5453 method for ULSD validation.

, (,						
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC06139096		
Sample Date		Client Info		27 Mar 2024		
Machine Age	hrs	Client Info		0		
Sample Status				NORMAL		
PHYSICAL PROP	ERTIES	method	limit/base	current	history1	history2
Fuel Color	text	*Visual Screen	Yllow	Red		
ASTM Color	scalar	*ASTM D1500		L4.0		
Visc @ 40°C	cSt	ASTM D445	3.0	2.53		
Pensky-Martens Flash Point	°C	*PMCC Calculated	52	65.2		
SULFUR CONTER	NT	method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185m	10	103		
Sulfur (UVF)	ppm	ASTM D5453		59		
DISTILLATION		method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D86	165	176		
5% Distillation Point	°C	ASTM D86		198		
10% Distill Point	°C	ASTM D86	201	206		
15% Distillation Point	°C	ASTM D86		214		
20% Distill Point	°C	ASTM D86	216	221		
30% Distill Point	°C	ASTM D86	230	236		
40% Distill Point	°C	ASTM D86	243	249		
50% Distill Point	°C	ASTM D86	255	262		
60% Distill Point	°C	ASTM D86	267	276		
70% Distill Point	°C	ASTM D86	280	291		
80% Distill Point	°C	ASTM D86	295	306		
85% Distillation Point	°C	ASTM D86	200	316		
90% Distill Point	°C	ASTM D86	310	327		
95% Distillation Point	°C	ASTM D86	010	345		
Final Boiling Point	°C	ASTM D86	341	363		
IGNITION QUALIT	ΓY	method	limit/base	current	history1	history2
API Gravity		ASTM D7777	37.7	36		
Cetane Index		ASTM D4737	<40.0	48		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	<1.0	0		
Sodium	ppm	ASTM D5185m	<0.1	<1		
Potassium	ppm	ASTM D5185m	<0.1	0		
Water	%	ASTM D6304	< 0.05	0.004		
ppm Water	ppm	ASTM D6304	<500	42		
% Gasoline	%	*In-House	<0.50	0.0		
% Biodiesel	%	*In-House	<20.0	0.0		




FUEL REPORT

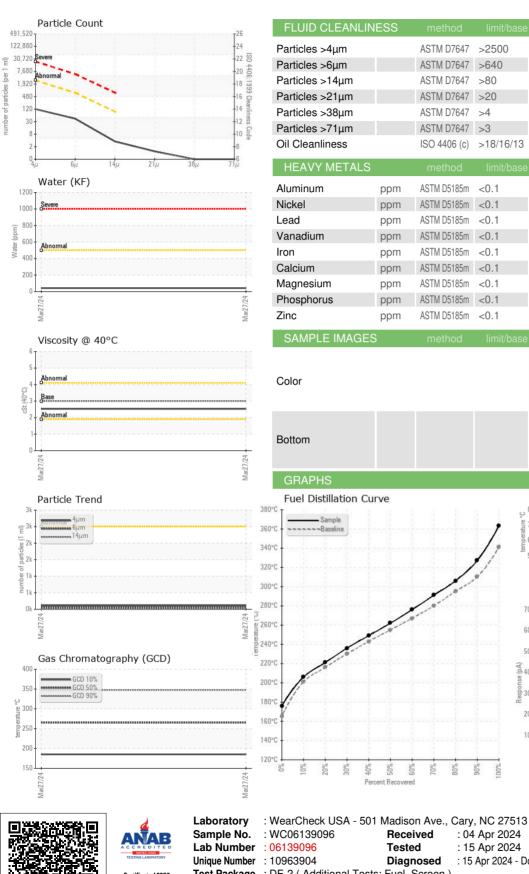

FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>2500	106		
Particles >6µm		ASTM D7647	>640	37		
Particles >14µm		ASTM D7647	>80	3		
Particles >21µm		ASTM D7647	>20	1		
Particles >38µm		ASTM D7647	>4	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>18/16/13	14/12/9		
HEAVY METALS		method	limit/base	current	history1	history2
Aluminum	ppm	ASTM D5185m	<0.1	0		
Nickel	ppm	ASTM D5185m	<0.1	0		
Lead	ppm	ASTM D5185m	<0.1	0		
Vanadium	ppm	ASTM D5185m	<0.1	0		
Iron	ppm	ASTM D5185m	<0.1	0		
Calcium	ppm	ASTM D5185m	<0.1	0		
Magnesium	ppm	ASTM D5185m	<0.1	0		
Phosphorus	ppm	ASTM D5185m	<0.1	0		
Zinc	ppm	ASTM D5185m	<0.1	0		
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color					no image	no image


Bottom



Pensky-Martens Flash Point (°C)

no image

no image





: WC06139096 Received : 04 Apr 2024 Lab Number : 06139096 Tested : 15 Apr 2024 Unique Number : 10963904 Diagnosed : 15 Apr 2024 - Doug Bogart Test Package : DF-2 (Additional Tests: Fuel, Screen) Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

PETROLEUM RECOVERY SERVICES 210 POWELL DR SUMMERVILLE, SC US 29483 Contact: AJAY EL Ajay@prsfuel.com T: (843)225-1777 E:

Report Id: PETSUM [WUSCAR] 06139096 (Generated: 05/27/2024 14:41:58) Rev: 1

Contact/Location: AJAY EL - PETSUM