

Sample Rating Trend



Machine Id EHA FILL Component Power Steering Fluid Fluid FUCHS TITAN CHF 11S (--- GAL)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the power steering fluid. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the power steering fluid is suitable for further service.

Particle Filter (Magn: 200 x)



| | | | | Mar2024 | | |
|------------------|----------|------------------|------------|-------------|----------|----------|
| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | PH06139111 | | |
| Sample Date | | Client Info | | 07 Mar 2024 | | |
| Machine Age | hrs | Client Info | | 0 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | N/A | | |
| Sample Status | | | | NORMAL | | |
| CONTAMINATIO | N | method | limit/base | current | history1 | history2 |
| Water | | WC Method | | NEG | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | | <1 | | |
| Chromium | ppm | ASTM D5185m | | <1 | | |
| Nickel | ppm | ASTM D5185m | | 0 | | |
| Titanium | ppm | ASTM D5185m | | <1 | | |
| Silver | ppm | ASTM D5185m | | 0 | | |
| Aluminum | ppm | ASTM D5185m | | 2 | | |
| Lead | ppm | ASTM D5185m | | 0 | | |
| Copper | ppm | ASTM D5185m | | <1 | | |
| Tin | ppm | ASTM D5185m | | <1 | | |
| Vanadium | | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| | ppm | ASTIVI DUTOJITI | | U | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 198 | | |
| Barium | ppm | ASTM D5185m | | 0 | | |
| Molybdenum | ppm | ASTM D5185m | | 0 | | |
| Manganese | ppm | ASTM D5185m | | 0 | | |
| Magnesium | ppm | ASTM D5185m | | 4 | | |
| Calcium | ppm | ASTM D5185m | | 29 | | |
| Phosphorus | ppm | ASTM D5185m | | 373 | | |
| Zinc | ppm | ASTM D5185m | | 0 | | |
| Sulfur | ppm | ASTM D5185m | | 711 | | |
| CONTAMINANTS | 6 | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | | 7 | | |
| Sodium | ppm | ASTM D5185m | | 0 | | |
| Potassium | ppm | ASTM D5185m | >20 | 1 | | |
| FLUID CLEANLIN | NESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | >10000 | 294 | | |
| Particles >6µm | | ASTM D7647 | >2500 | 125 | | |
| Particles >14µm | | ASTM D7647 | >320 | 14 | | |
| Particles >21µm | | ASTM D7647 | >80 | 6 | | |
| Particles >38µm | | ASTM D7647 | >20 | 1 | | |
| Particles >71µm | | ASTM D7647 | | 0 | | |
| Oil Cleanliness | | ISO 4406 (c) | >20/18/15 | 15/14/11 | | |
| FLUID DEGRAD | ATION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 1.72 | | |
| | ing nong | . 10 1 11 000-10 | | | | |

Report Id: PARNEWMN [WUSCAR] 06139111 (Generated: 04/04/2024 16:39:18) Rev: 1

Contact/Location: MATT DALEO - PARNEWMN



491,520 122 88

Ê 30,720

number of particles (per 1

7,68

1.920 48

120

30

8

12 Ê¹⁰⁴

 of particles (1) 8

6k 41

2 0

22

2 2 cSt (40°C)

> A 16 15

> > **Mar7/74**

12


particles (1) 8

6k er of 1 4

2

0k Mar7/24

OIL ANALYSIS REPORT

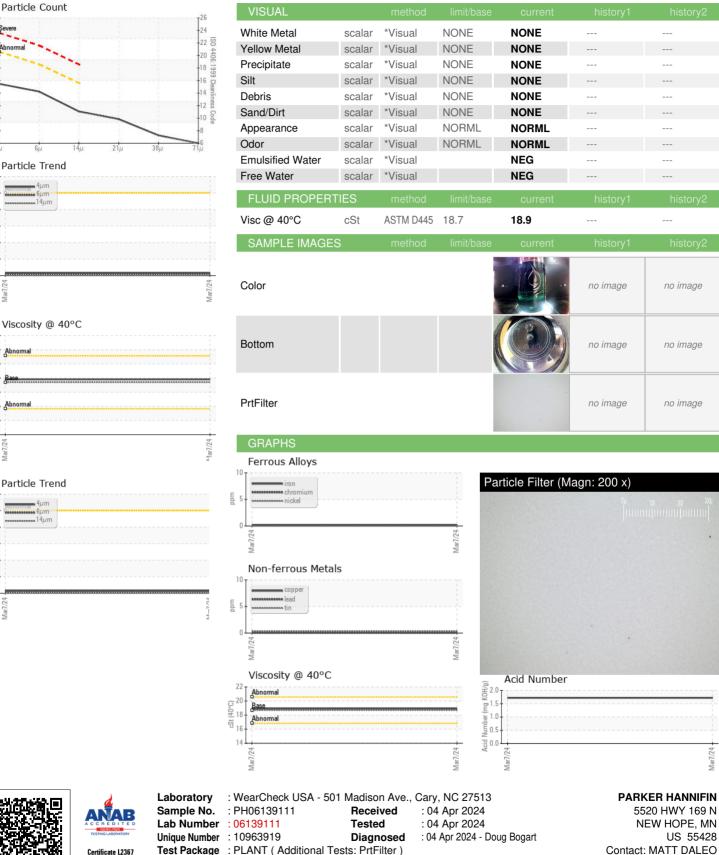

Test Package : PLANT (Additional Tests: PrtFilter) Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: MATT DALEO - PARNEWMN

US 55428

T:

F:

matthew.daleo@parker.com

Mar7/24

no imade

no imade

no image