




# OIL ANALYSIS REPORT



Machine Id  
**CATERPILLAR C32 RPM00619**  
 Component  
**Port Diesel Engine**  
 Fluid  
**HIGH PERFORMANCE LUBRICANTS HDMO 15W40 (22 GAL)**

Sample Rating Trend

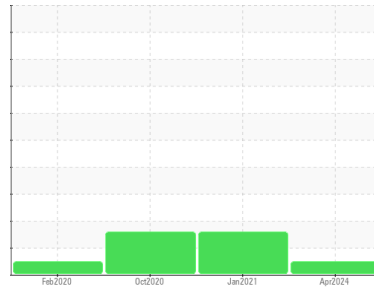

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>HPL007873</b>   | HPL010872   | HPL010897   |
| Sample Date   | Client Info |             | <b>01 Apr 2024</b> | 18 Jan 2021 | 16 Oct 2020 |
| Machine Age   | hrs         | Client Info | <b>1419</b>        | 1100        | 1062        |
| Oil Age       | hrs         | Client Info | <b>94</b>          | 209         | 171         |
| Oil Changed   | Client Info |             | <b>Not Changed</b> | Changed     | Not Changed |
| Sample Status |             |             | <b>NORMAL</b>      | ABNORMAL    | ABNORMAL    |

## CONTAMINATION

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >5         | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water  | WC Method | >0.2       | <b>NEG</b>     | NEG      | NEG      |
| Glycol | WC Method |            | <b>NEG</b>     | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >100 | <b>18</b>    | 39       | 33       |
| Chromium | ppm    | ASTM D5185m >20  | <b>&lt;1</b> | 2        | 2        |
| Nickel   | ppm    | ASTM D5185m >2   | <b>&lt;1</b> | 1        | 0        |
| Titanium | ppm    | ASTM D5185m >2   | <b>0</b>     | <1       | <1       |
| Silver   | ppm    | ASTM D5185m >2   | <b>0</b>     | 0        | 0        |
| Aluminum | ppm    | ASTM D5185m >25  | <b>8</b>     | 13       | 0        |
| Lead     | ppm    | ASTM D5185m >40  | <b>2</b>     | 5        | 2        |
| Copper   | ppm    | ASTM D5185m >330 | <b>3</b>     | 8        | 8        |
| Tin      | ppm    | ASTM D5185m >15  | <b>&lt;1</b> | 0        | <1       |
| Antimony | ppm    | ASTM D5185m      | <b>---</b>   | 0        | 0        |
| Vanadium | ppm    | ASTM D5185m      | <b>&lt;1</b> | 0        | <1       |
| Cadmium  | ppm    | ASTM D5185m      | <b>0</b>     | 0        | 0        |

## ADDITIVES

|            | method | limit/base        | current      | history1 | history2 |
|------------|--------|-------------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 200   | <b>27</b>    | 104      | 168      |
| Barium     | ppm    | ASTM D5185m       | <b>0</b>     | 0        | 3        |
| Molybdenum | ppm    | ASTM D5185m 85    | <b>568</b>   | 599      | 654      |
| Manganese  | ppm    | ASTM D5185m       | <b>&lt;1</b> | <1       | <1       |
| Magnesium  | ppm    | ASTM D5185m 525   | <b>834</b>   | 511      | 471      |
| Calcium    | ppm    | ASTM D5185m 4300  | <b>2594</b>  | 4001     | 3598     |
| Phosphorus | ppm    | ASTM D5185m 1000  | <b>982</b>   | 879      | 859      |
| Zinc       | ppm    | ASTM D5185m 1100  | <b>1142</b>  | 986      | 1017     |
| Sulfur     | ppm    | ASTM D5185m 20200 | <b>10259</b> | 14317    | 13910    |

## CONTAMINANTS

|           | method | limit/base      | current   | history1 | history2 |
|-----------|--------|-----------------|-----------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >25 | <b>24</b> | ▲ 29     | ▲ 30     |
| Sodium    | ppm    | ASTM D5185m     | <b>1</b>  | 3        | 4        |
| Potassium | ppm    | ASTM D5185m >20 | <b>2</b>  | 6        | 2        |

## INFRA-RED




|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 >3  | <b>1.2</b>  | 1.8      | 1.3      |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>9.8</b>  | 10.2     | 9.3      |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>36.7</b> | 29.9     | 28.3     |

## FLUID DEGRADATION

|                  | method   | limit/base      | current      | history1 | history2 |
|------------------|----------|-----------------|--------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>33.4</b>  | 17.9     | 17.2     |
| Base Number (BN) | mg KOH/g | ASTM D2896 14.5 | <b>15.14</b> | 14.3     | 13.3     |











# OIL ANALYSIS REPORT

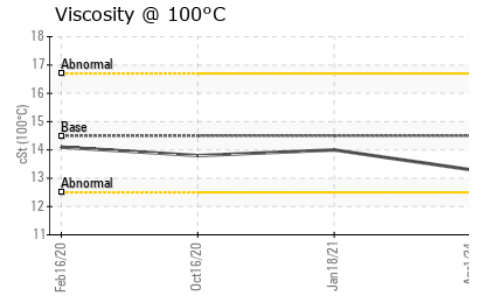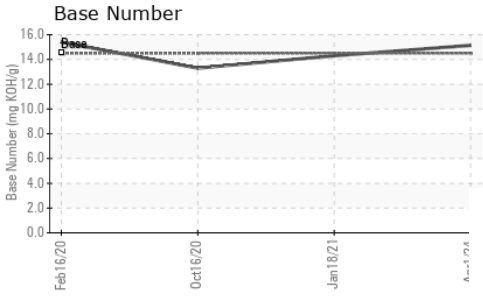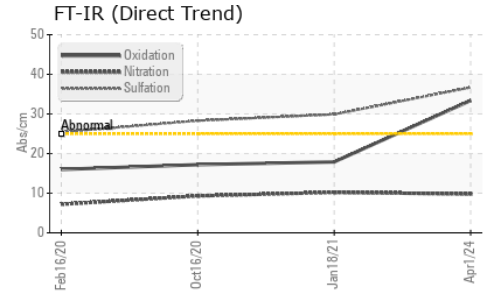

| PARAMETER        | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 14.5    | 13.3     | 14.0     |

### GRAPHS

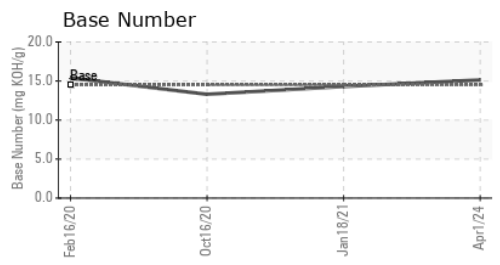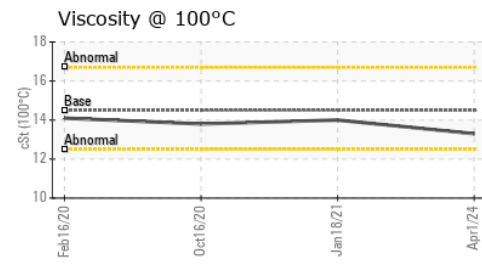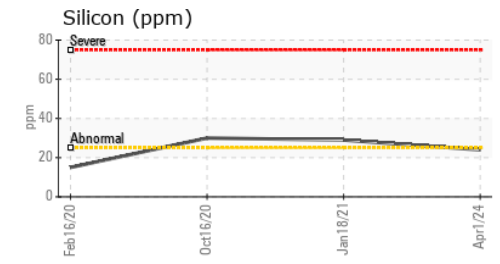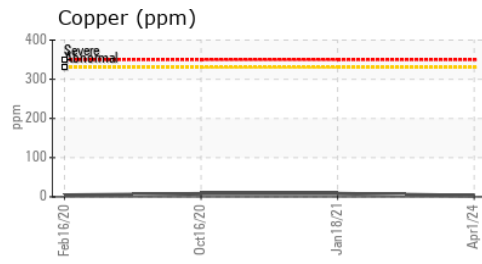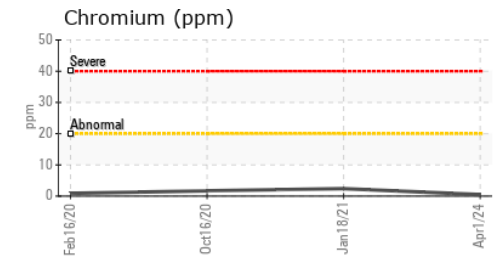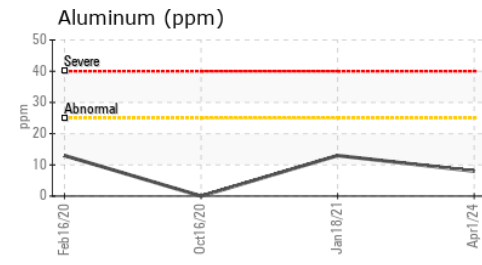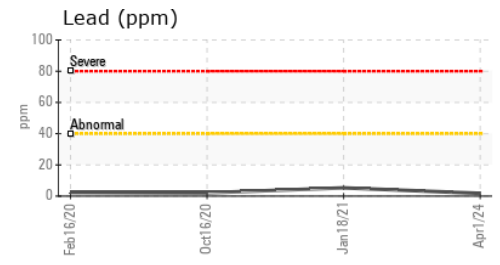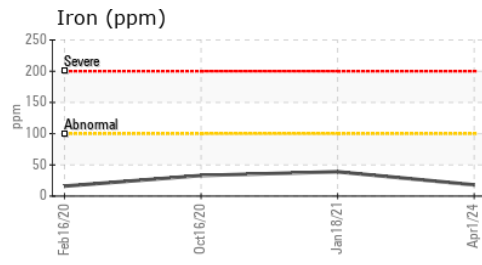

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : HPL007873      **Received** : 04 Apr 2024  
**Lab Number** : 06139359      **Tested** : 05 Apr 2024  
**Unique Number** : 10964167      **Diagnosed** : 06 Apr 2024 - Don Baldrige  
**Test Package** : MOB 2

**STEVENSON CRANE**  
 410 STEVENSON DR  
 BOLINGBROOK, IL  
 US 60440  
 Contact: DAVE KOEHNE  
 davidk@stevensoncrane.com  
 T: (630)972-9199  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)