

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id **TOTE 89** Component New (Unused) Oil Fluid {not provided} (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time.

Wear

All wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


Sample Number Client Info TLC0001664 Sample Date Client Info 01 Apr 2024 Machine Age hrs Client Info 0 Oil Age hrs Client Info 0 Oil Age hrs Client Info 0 Oil Changed Client Info N/A Sample Status Imathematical Status NORMAL WEAR METALS method limit/base current history1 Iron ppm ASTM D5185m<>5 <1	history2
Machine AgehrsClient Info0Oil AgehrsClient Info0Oil ChangedClient InfoN/ASample StatusImatherNORMALWEAR METALSmethodlimit/basecurrenthistory1	
Machine AgehrsClient Info0Oil AgehrsClient Info0Oil ChangedClient InfoN/ASample StatusImatherNORMALWEAR METALSmethodlimit/basecurrenthistory1	
Oil Changed Client Info N/A Sample Status NORMAL WEAR METALS method limit/base current history1	
Sample Status NORMAL WEAR METALS method limit/base current history1	
Sample Status NORMAL WEAR METALS method limit/base current history1	
WEAR METALS method limit/base current history1	
Cadmium ppm ASTM D5185m 0	
ADDITIVES method limit/base current history1	history2
Boron ppm ASTM D5185m 91	
Barium ppm ASTM D5185m 0	
Molybdenum ppm ASTM D5185m 135	
Manganese ppm ASTM D5185m 0	
Magnesium ppm ASTM D5185m 408	
Calcium ppm ASTM D5185m 1481	
Phosphorus ppm ASTM D5185m 650	
Zinc ppm ASTM D5185m 869	
Sulfur ppm ASTM D5185m 2567	
CONTAMINANTS method limit/base current history1	history2
Silicon ppm ASTM D5185m >15 4	
Potassium ppm ASTM D5185m >20 1	
FLUID CLEANLINESS method limit/base current history1	history2
Particles >4μm ASTM D7647 >5000 2341	
Particles >14μm ASTM D7647 >160 7	
Particles >21μm ASTM D7647 >40 2	
Particles >38μm ASTM D7647 >10 1	
Particles >71μm ASTM D7647 >3 0	
Oil Cleanliness ISO 4406 (c) >19/17/14 18/15/10	
FLUID DEGRADATION method limit/base current history1	history2
Acid Number (AN) mg KOH/g ASTM D8045 1.23	




OIL ANALYSIS REPORT

VISUAL





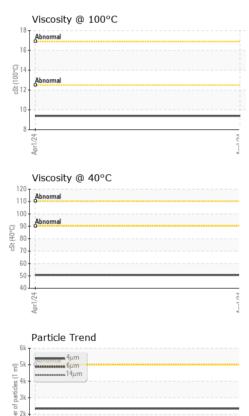

VISUAL		method	limit/base	current	history1	history
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate		*Visual	NONE	NONE		
Silt		*Visual	NONE	NONE		
Debris		*Visual	NONE	NONE		
Sand/Dirt		*Visual	NONE	NONE		
Appearance		*Visual	NORML	NORML		
Odor		*Visual	NORML	NORML		
Emulsified Water		*Visual	NOTIVIL	NEG		
Free Water		*Visual		NEG		
FLUID PROPERT	TIES	method	limit/base	current	history1	history
Visc @ 40°C	cSt	ASTM D445	5	50.61		
Visc @ 100°C	cSt	ASTM D445	5	9.38		
Viscosity Index (VI)	Scale	ASTM D2270)	171		
SAMPLE IMAGES	S	method	limit/base	current	history1	history
Color					no image	no imag
Bottom					no image	no image
GRAPHS						
Ferrous Alloys				Particle Count	t	
10 8			491,52	⁰		
essesses chromium			122,880	0-		
E 6 and a second			30,72	Severe		
2-						
24 24			1,680 12	0 Abnormal		
Apri/24			Apr1/24.	0		
Non-ferrous Metal	le.		Apr1/24 1261 Apr1/24 1261 Amil			
10 _T	15		f bart			
8 - copper			고 120 	0-		
E 6 total tin			2 31	•		
2				8		
0					1	
Apr1/24			Apr1/24	2 -		-
Ap			Ap	0,		
Viscosity @ 40°C				^{4μ} ^{6μ} Acid Number	14μ 21μ	38µ 7
120 Abnormal			(B/1.	⁵ T		
ာ ¹⁰⁰ Abnormal			21.0 27.1	0		
€ 80 -			per (n			
⁶⁰			E O.	5-		
40						
2			pr1/24	pr1/24		
120 会 100 会 80 60			April24	Acid Number		

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: SUPATLGA [WUSCAR] 06139411 (Generated: 04/10/2024 09:28:31) Rev: 1

Certificate L2367

Contact/Location: MICHAEL JACKSON - SUPATLGA

F:

T: (470)991-1693