




# FUEL REPORT

## Sample Rating Trend

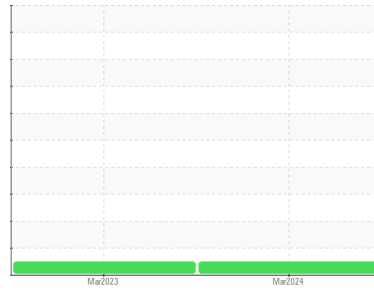

**NORMAL**



Machine Id  
**STEWARD HEALTH CARE SYS - ALF GEN**  
 Component  
**Tank Diesel Fuel**  
 Fluid  
**No.2 DIESEL FUEL (ULTRALOW SULPHUR) (225 GAL)**

### DIAGNOSIS

#### Recommendation

All laboratory tests indicate that this sample meets specifications for No.2 ultra-low-sulfur diesel fuel.

#### Corrosion

All metal levels are normal indicating no corrosion in the system.

#### Contaminants

There is no bacteria or fungus (yeast and/or mold) indicated in the sample. The water content is negligible. There is no indication of any contamination in the fuel.

#### Fuel Condition

Sulfur value derived by ASTM D5453 method for ULSD validation. Sulfur level is acceptable for ULSD specification.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WCDF4573</b>	WCDF4375	---
Sample Date	Client Info			<b>28 Mar 2024</b>	29 Mar 2023	---
Machine Age	mls	Client Info		<b>0</b>	0	---
Sample Status				<b>NORMAL</b>	NORMAL	---

PHYSICAL PROPERTIES		method	limit/base	current	history1	history2
Specific Gravity		*ASTM D1298	0.839	---	0.843	---
Fuel Color	text	*Visual Screen	Yellow	<b>Red</b>	Red	---
ASTM Color	scalar	*ASTM D1500		<b>L4.0</b>	L5.0	---
Visc @ 40°C	cSt	ASTM D445	3.0	<b>2.62</b>	2.29	---
Pensky-Martens Flash Point	°C	*PMCC Calculated	52	<b>63.9</b>	61	---
Cloud Point	°C	ASTM D5771		<b>-13</b>	-12	---

SULFUR CONTENT		method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185m	10	<b>28</b>	2	---
Sulfur (UVF)	ppm	ASTM D5453		<b>15</b>	23	---





DISTILLATION		method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D86	165	<b>175</b>	168	---
5% Distillation Point	°C	ASTM D86		<b>198</b>	193	---
10% Distill Point	°C	ASTM D86	201	<b>209</b>	205	---
15% Distillation Point	°C	ASTM D86		<b>217</b>	214	---
20% Distill Point	°C	ASTM D86	216	<b>225</b>	222	---
30% Distill Point	°C	ASTM D86	230	<b>240</b>	237	---
40% Distill Point	°C	ASTM D86	243	<b>253</b>	251	---
50% Distill Point	°C	ASTM D86	255	<b>266</b>	265	---
60% Distill Point	°C	ASTM D86	267	<b>279</b>	278	---
70% Distill Point	°C	ASTM D86	280	<b>293</b>	292	---
80% Distill Point	°C	ASTM D86	295	<b>308</b>	308	---
85% Distillation Point	°C	ASTM D86		<b>318</b>	318	---
90% Distill Point	°C	ASTM D86	310	<b>328</b>	329	---
95% Distillation Point	°C	ASTM D86		<b>345</b>	346	---
Final Boiling Point	°C	ASTM D86	341	<b>358</b>	353	---
Distillation Residue	%	ASTM D86	3.0	---	1.4	---
Distillation Loss	%	ASTM D86	3.0	---	0.9	---

IGNITION QUALITY		method	limit/base	current	history1	history2
API Gravity		ASTM D7777	37.7	<b>36</b>	36.4	---
Cetane Index		ASTM D4737	<40.0	<b>48</b>	48.6	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	<1.0	<b>0</b>	0	---
Sodium	ppm	ASTM D5185m	<0.1	<b>&lt;1</b>	0	---
Potassium	ppm	ASTM D5185m	<0.1	<b>0</b>	<1	---
Water	%	ASTM D6304	<0.05	<b>0.002</b>	0.003	---
ppm Water	ppm	ASTM D6304	<500	<b>24</b>	32.8	---
% Gasoline	%	*In-House	<0.50	<b>0.0</b>	0.0	---
% Biodiesel	%	*In-House	<20.0	<b>0.0</b>	0.0	---






# FUEL REPORT

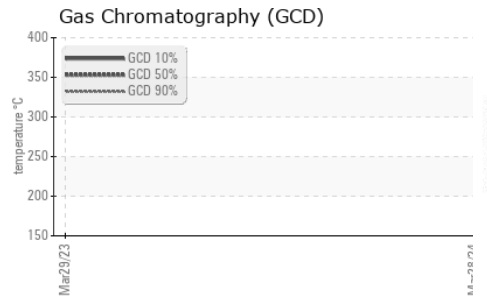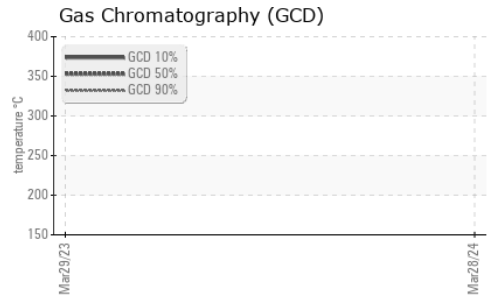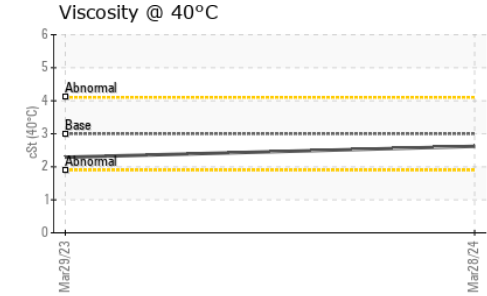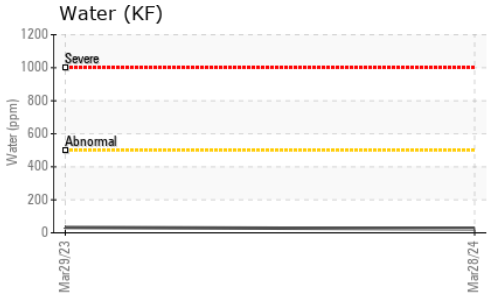

HEAVY METALS	method	limit/base	current	history1	history2
Aluminum	ppm	ASTM D5185m <0.1	0	0	---
Nickel	ppm	ASTM D5185m <0.1	0	0	---
Lead	ppm	ASTM D5185m <0.1	0	0	---
Vanadium	ppm	ASTM D5185m <0.1	0	0	---
Iron	ppm	ASTM D5185m <0.1	0	0	---
Calcium	ppm	ASTM D5185m <0.1	0	0	---
Magnesium	ppm	ASTM D5185m <0.1	0	0	---
Phosphorus	ppm	ASTM D5185m <0.1	0	4	---
Zinc	ppm	ASTM D5185m <0.1	0	0	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					no image
Bottom					no image

## GRAPHS

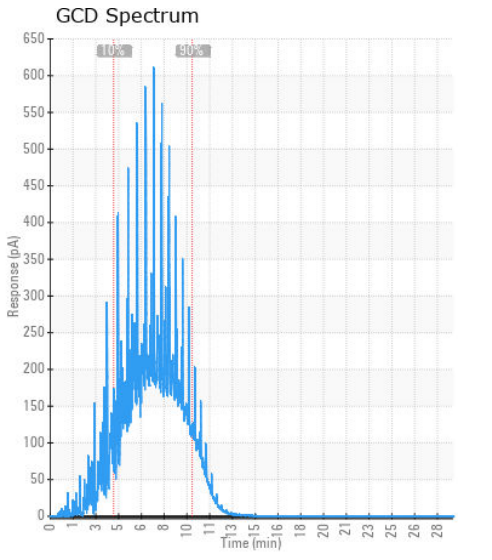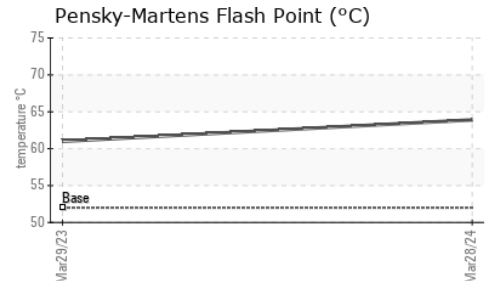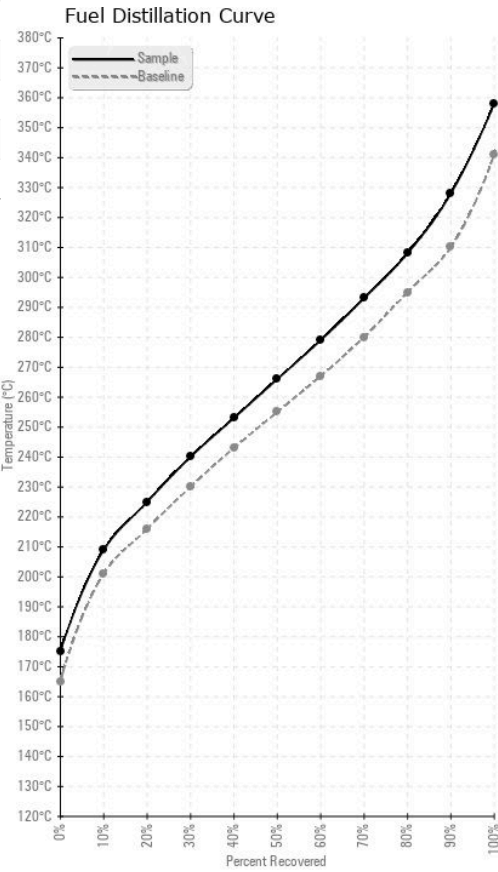

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WCDF4573 **Received** : 04 Apr 2024  
**Lab Number** : 06139426 **Tested** : 15 Apr 2024  
**Unique Number** : 10964234 **Diagnosed** : 15 Apr 2024 - Doug Bogart  
**Test Package** : DF-2 ( Additional Tests: CldPt, Fuel, Screen )

**TANK WIZARDS**  
 1511 MASTERS RD NW  
 PALM BAY, FL  
 US 32907

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: WENDALL STRODERD  
 wendall@tankwizards.com  
 T: (321)427-5149  
 F: (321)574-4131