




# OIL ANALYSIS REPORT



Area  
**OKLAHOMA/102/EG - MOTOR GRADER**  
 Machine Id  
**78.251 [OKLAHOMA^102^EG - MOTOR GRADER]**  
 Component  
**Main Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (--- GAL)**

### Sample Rating Trend

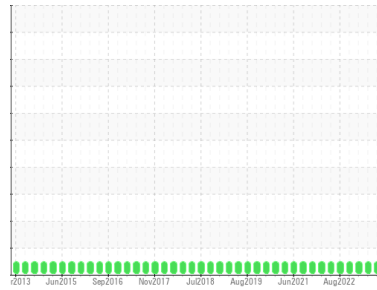

**NORMAL**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0914431</b>	WC0778298	WC0769770
Sample Date	Client Info		<b>02 Apr 2024</b>	12 Dec 2023	18 Jan 2023
Machine Age	hrs	Client Info	<b>13480</b>	13202	12825
Oil Age	hrs	Client Info	<b>278</b>	377	325
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>9</b>	7	11
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	3	1
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	2
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	1	<1
Tin	ppm	ASTM D5185m >15	<b>1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>64</b>	77	55
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 0	<b>41</b>	43	43
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m 0	<b>493</b>	518	547
Calcium	ppm	ASTM D5185m	<b>1683</b>	1733	1843
Phosphorus	ppm	ASTM D5185m	<b>768</b>	750	774
Zinc	ppm	ASTM D5185m	<b>917</b>	936	989
Sulfur	ppm	ASTM D5185m	<b>2589</b>	2774	3095

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	5	3
Sodium	ppm	ASTM D5185m	<b>1</b>	0	2
Potassium	ppm	ASTM D5185m >20	<b>2</b>	1	<1

### INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.1	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.1</b>	6.2	9.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.7</b>	22.0	24.4

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>21.5</b>	20.5	23.6
Base Number (BN)	mg KOH/g	ASTM D2896 9.4	<b>10.1</b>	9.8	9.9







# OIL ANALYSIS REPORT

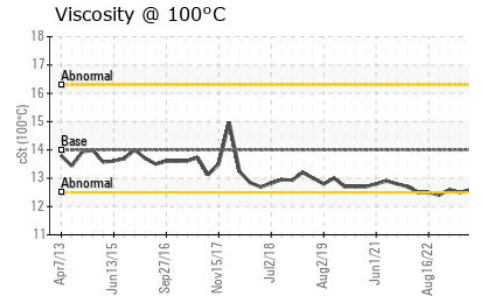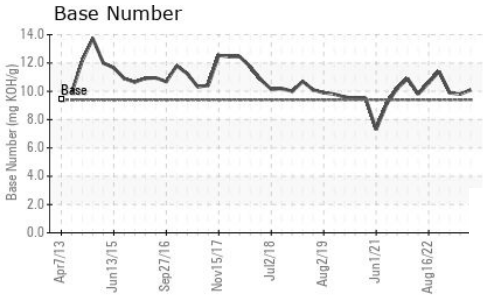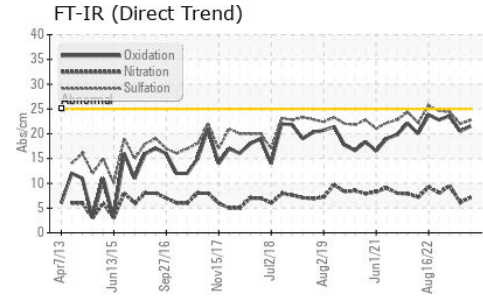

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	12.6	12.5	12.6

### GRAPHS

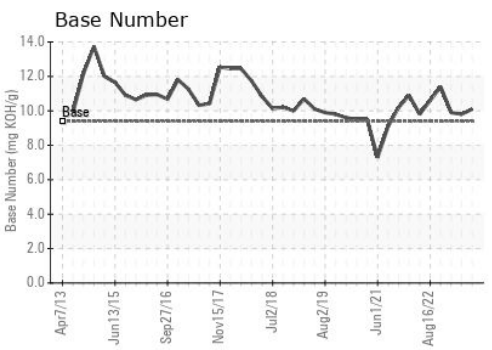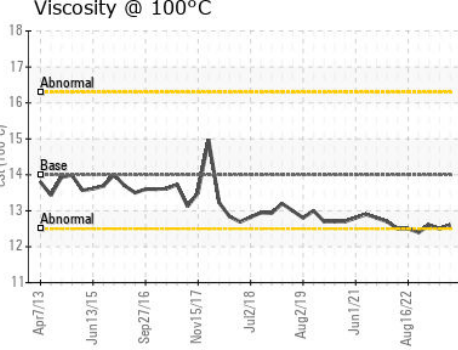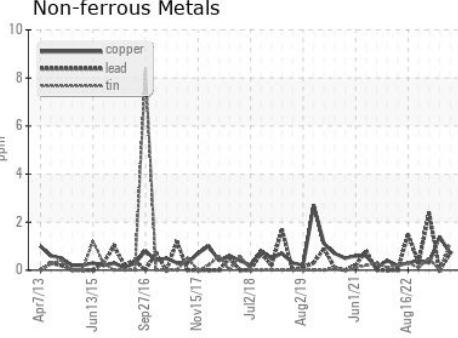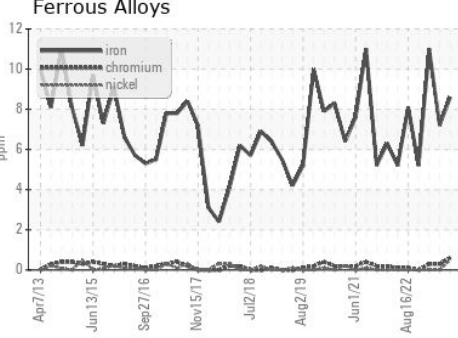

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0914431      **Received** : 05 Apr 2024  
**Lab Number** : 06139486      **Tested** : 05 Apr 2024  
**Unique Number** : 10964294      **Diagnosed** : 05 Apr 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS 67213  
 Contact: JIMMY DERAMUS  
 jimmy.deramus@sherwood.net  
 T: (918)691-3306  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)