




# OIL ANALYSIS REPORT



Area  
**OKLAHOMA/3/EG - LOADER**  
 Machine Id  
**48.81L [OKLAHOMA^3^EG - LOADER]**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL MOBILTRANS AST 30 (--- GAL)**

## Sample Rating Trend

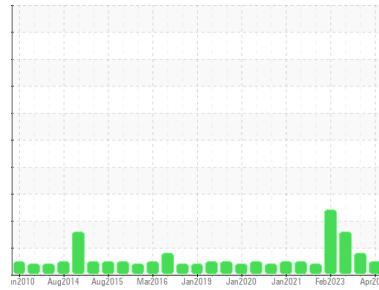

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0914478</b>	WC0857309	WC0821715
Sample Date	Client Info		<b>02 Apr 2024</b>	20 Oct 2023	13 Jun 2023
Machine Age	hrs	Client Info	<b>2532</b>	1757	1083
Oil Age	hrs	Client Info	<b>2532</b>	18410	1083
Oil Changed	Client Info		<b>Changed</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	ATTENTION	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>7</b>	5	▲ 25
Chromium	ppm	ASTM D5185m >10	<b>0</b>	<1	1
Nickel	ppm	ASTM D5185m >10	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >10	<b>1</b>	2	6
Lead	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m >75	<b>&lt;1</b>	<1	1
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>94</b>	80	46
Barium	ppm	ASTM D5185m	<b>0</b>	0	2
Molybdenum	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Manganese	ppm	ASTM D5185m	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m	<b>20</b>	19	20
Calcium	ppm	ASTM D5185m	<b>3060</b>	2629	1546
Phosphorus	ppm	ASTM D5185m	<b>981</b>	969	892
Zinc	ppm	ASTM D5185m	<b>1262</b>	1288	1160
Sulfur	ppm	ASTM D5185m	<b>4666</b>	4147	3053

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>9</b>	9	16
Sodium	ppm	ASTM D5185m	<b>0</b>	0	<1
Potassium	ppm	ASTM D5185m >20	<b>2</b>	2	2

## FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>67443</b>	30126	---
Particles >6µm	ASTM D7647	>2500	<b>1972</b>	● 3805	---
Particles >14µm	ASTM D7647	>640	<b>6</b>	172	---
Particles >21µm	ASTM D7647	>160	<b>1</b>	33	---
Particles >38µm	ASTM D7647	>40	<b>0</b>	1	---
Particles >71µm	ASTM D7647	>10	<b>0</b>	0	---
Oil Cleanliness	ISO 4406 (c)	>--/18/16	<b>23/18/10</b>	● 22/19/15	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>1.08</b>	1.06	0.86




# OIL ANALYSIS REPORT

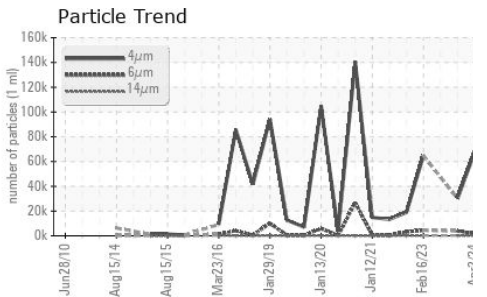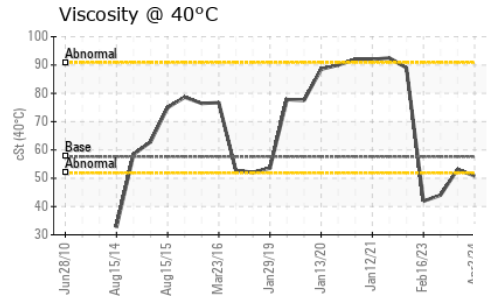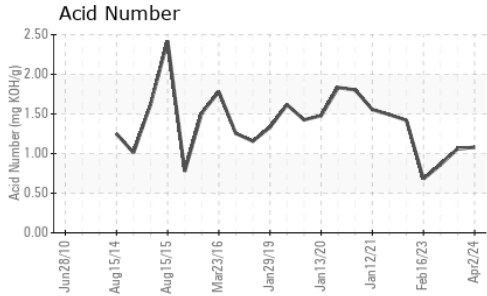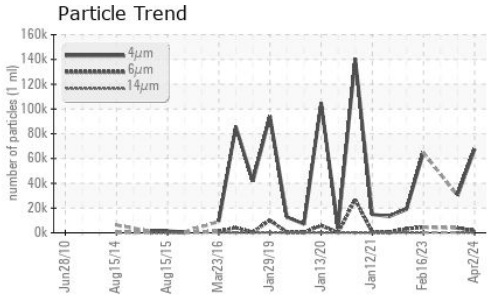





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	57.6	50.8	53.1 ● 44.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

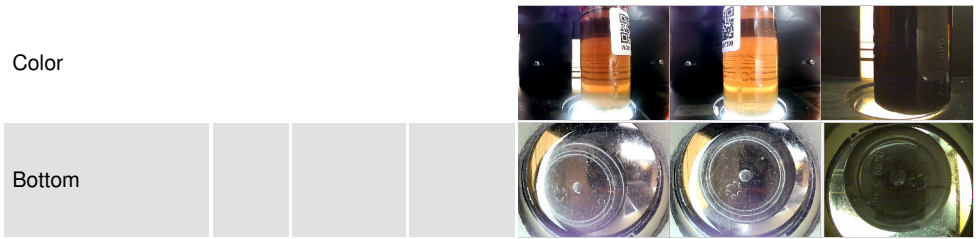

## GRAPHS

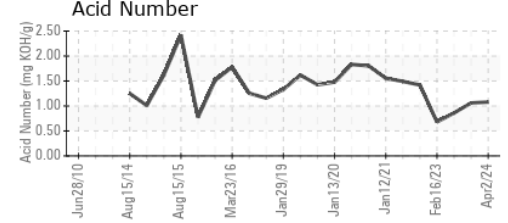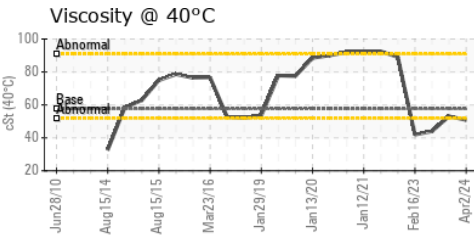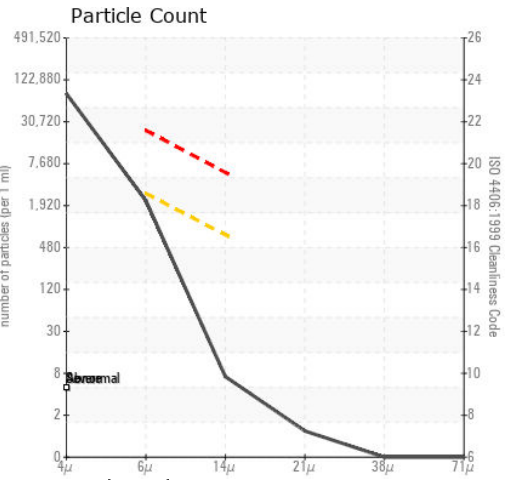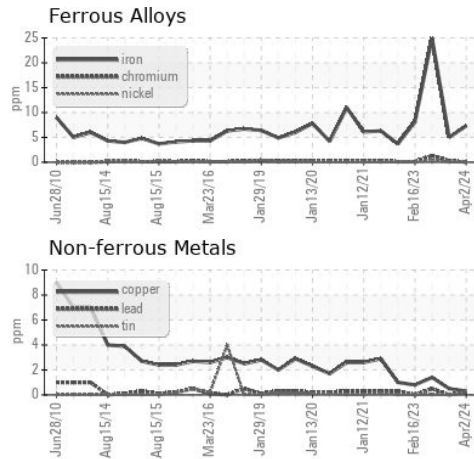

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0914478 **Received** : 05 Apr 2024  
**Lab Number** : 06139841 **Tested** : 08 Apr 2024  
**Unique Number** : 10964649 **Diagnosed** : 08 Apr 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: DOUG KING  
 doug.king@sherwood.net  
 T: (316)617-3161  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)