

## **OIL ANALYSIS REPORT**

Sample Rating Trend

### NORMAL

#### Machine Id

# NOT GIVEN WC0914010 (S/N NO INFO ON SIF)

Component Hydraulic System Fluid

{not provided} (--- GAL)

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	<b>/IATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0914010		
Sample Date		Client Info		04 Apr 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	<1		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m	>20	0		
Tin	ppm	ASTM D5185m	>20	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		0		
Phosphorus	ppm	ASTM D5185m		351		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m		89		
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	2		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	<1		
Water	%	ASTM D6304	>0.05	NEG		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	478		
Particles >6µm		ASTM D7647	>1300	110		
Particles >14µm		ASTM D7647	>160	10		
Particles >21µm		ASTM D7647	>40	2		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	16/14/10		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.27		




## **OIL ANALYSIS REPORT**

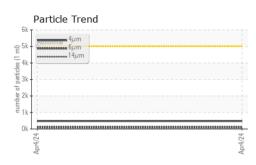

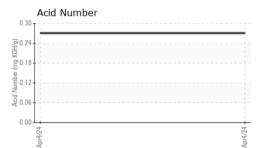

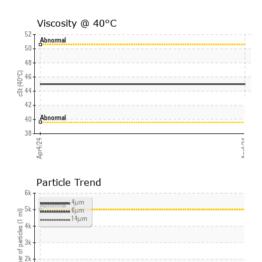

0k Apr4/24

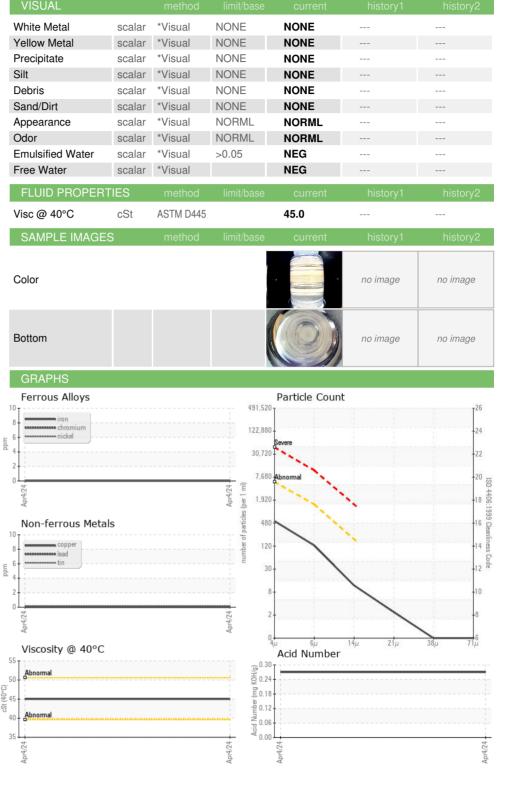

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513 **DXP - DES MOINES** Sample No. : WC0914010 Received : 05 Apr 2024 2100 DIXON STREET, SUITE A Lab Number : 06139874 Tested : 09 Apr 2024 DES MOINES, IA Unique Number : 10964682 Diagnosed : 09 Apr 2024 - Jonathan Hester US 50316-2174 Test Package : IND 2 (Additional Tests: KF) Contact: KENDRA BURNS Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369. kendra.burns@dxpe.com \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T: (515)250-6077 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (515)262-5765

Report Id: PREDES [WUSCAR] 06139874 (Generated: 04/09/2024 19:20:38) Rev: 1

Contact/Location: KENDRA BURNS - PREDES