




# OIL ANALYSIS REPORT

Sample Rating Trend

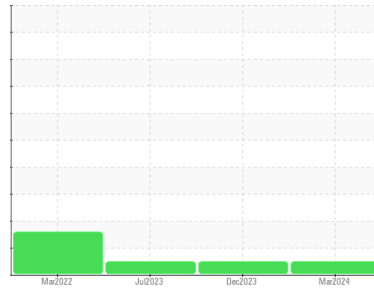

**NORMAL**



Machine Id  
**102 (S/N 1996-0029)**  
 Component  
**Gearbox**  
 Fluid  
**USPI FG GEAR 220 (13 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>USP224138</b>	USPM30623	USP224136
Sample Date	Client Info	<b>29 Mar 2024</b>	19 Dec 2023	27 Jul 2023
Machine Age	hrs Client Info	<b>0</b>	0	0
Oil Age	hrs Client Info	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >200	<b>5</b>	7	9
Chromium	ppm ASTM D5185m >15	<b>0</b>	<1	0
Nickel	ppm ASTM D5185m >15	<b>0</b>	0	0
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >25	<b>&lt;1</b>	0	0
Lead	ppm ASTM D5185m >100	<b>0</b>	0	0
Copper	ppm ASTM D5185m >200	<b>&lt;1</b>	<1	<1
Tin	ppm ASTM D5185m >25	<b>&lt;1</b>	0	0
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	<b>0</b>	0	0
Barium	ppm ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m	<b>0</b>	0	0
Manganese	ppm ASTM D5185m	<b>0</b>	0	0
Magnesium	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Calcium	ppm ASTM D5185m	<b>0</b>	2	3
Phosphorus	ppm ASTM D5185m	<b>434</b>	560	644
Zinc	ppm ASTM D5185m	<b>0</b>	0	8
Sulfur	ppm ASTM D5185m	<b>48</b>	460	625

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >50	<b>5</b>	7	13
Sodium	ppm ASTM D5185m	<b>0</b>	4	0
Potassium	ppm ASTM D5185m >20	<b>&lt;1</b>	0	1
Water	% ASTM D6304 >0.2	<b>0.003</b>	0.003	0.016
ppm Water	ppm ASTM D6304 >2000	<b>26</b>	39	165.2

## FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >20000	<b>459</b>	1011	628
Particles >6µm	ASTM D7647 >5000	<b>218</b>	378	211
Particles >14µm	ASTM D7647 >640	<b>58</b>	74	32
Particles >21µm	ASTM D7647 >160	<b>22</b>	23	9
Particles >38µm	ASTM D7647 >40	<b>1</b>	1	1
Particles >71µm	ASTM D7647 >10	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c) >21/19/16	<b>16/15/13</b>	17/16/13	16/15/12

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045	<b>0.61</b>	0.63	0.61




# OIL ANALYSIS REPORT

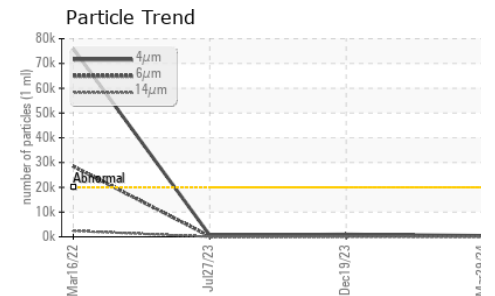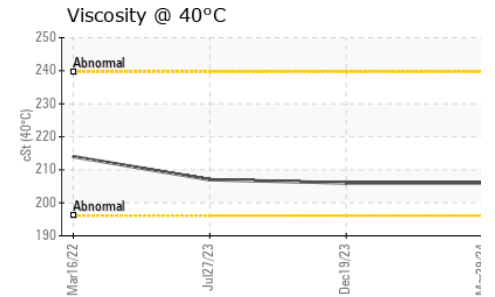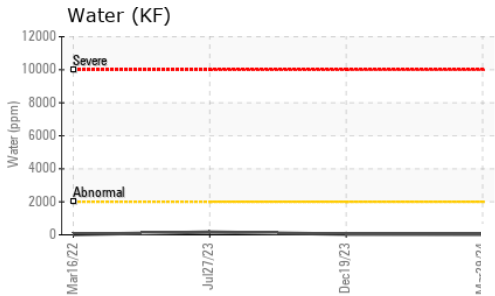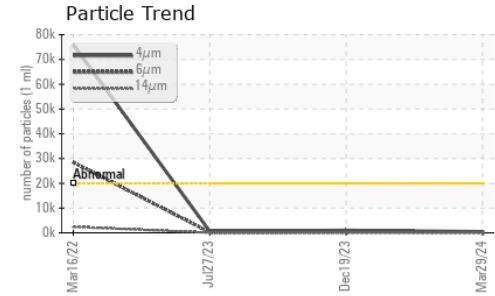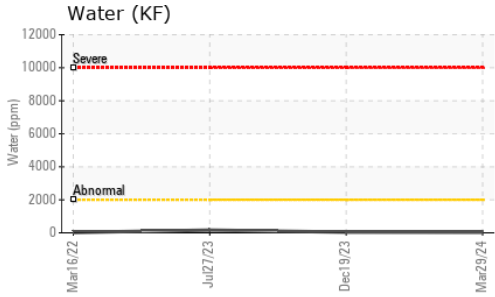




VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	206	206	207

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

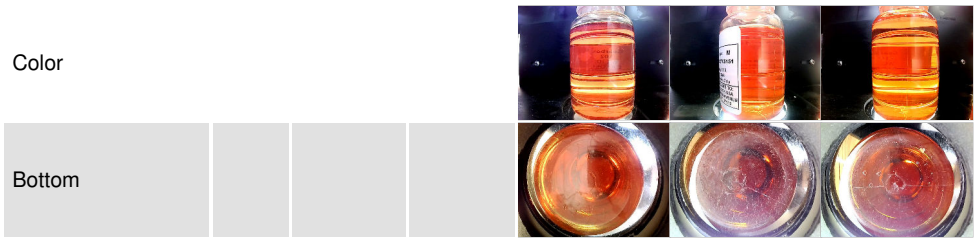

## GRAPHS

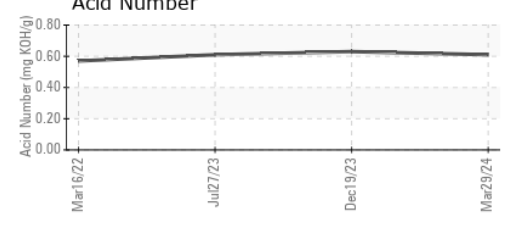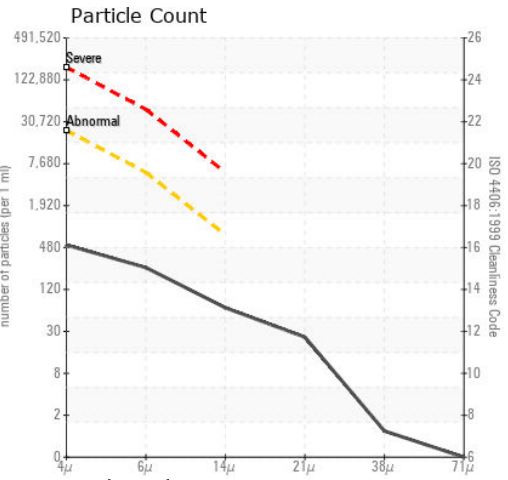

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : USP224138      **Received** : 05 Apr 2024  
**Lab Number** : 06139905      **Tested** : 08 Apr 2024  
**Unique Number** : 10964713      **Diagnosed** : 08 Apr 2024 - Doug Bogart  
**Test Package** : IND 2

**CARGILL FEED & NUTRITION - OKLAHOMA CITY**  
 2100 S ROBINSON AVE  
 OKLAHOMA CITY, OK  
 US 73109  
 Contact: JOHN HAMRICK  
 JOHN\_HAMRICK@CARGILL.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)