


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



2BSC-5 (S/N 81A800018)

Refrigeration Compressor

USPI ALT-68 SC (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


				outer, parent		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0007925	USP0000359	USP231269
Sample Date		Client Info		03 Apr 2024	31 Aug 2023	18 May 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0	<1	0
Chromium	ppm	ASTM D5185m	>2	0	0	0
Nickel	ppm	ASTM D5185m		0	<1	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>3	<1	0	0
Lead	ppm	ASTM D5185m	>2	0	0	0
Copper	ppm	ASTM D5185m	>8	0	0	0
Tin	ppm	ASTM D5185m	>4	<1	0	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		0	<1	<1
Phosphorus	ppm	ASTM D5185m		0	<1	0
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m	50	0	86	40
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	2	2
Sodium	ppm	ASTM D5185m		0	2	0
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water	%	ASTM D6304	>0.01	0.002	0.001	0.003
ppm Water	ppm	ASTM D6304	>100	19	9.0	36.6
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	2892	▲ 37035	13247
Particles >6µm		ASTM D7647	>2500	528	4816	1532
Particles >14μm		ASTM D7647	>320	13	59	16
Particles >21μm		ASTM D7647	>80	3	19	3
Particles >38μm		ASTM D7647	>20	0	1	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	19/16/11	<u>22/19/13</u>	21/18/11
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2





OIL ANALYSIS REPORT












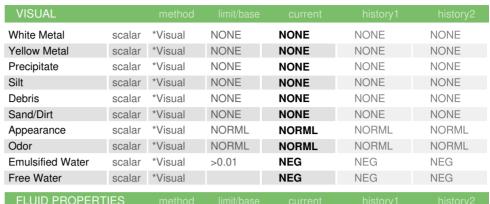


. 20.2						
Visc @ 40°C	cSt	ASTM D445	65.6	68.8	68.4	68.4

SAMP	IIIAA	൨൳൦
SAIVIE	IIVIA	GEO



Bottom

Color

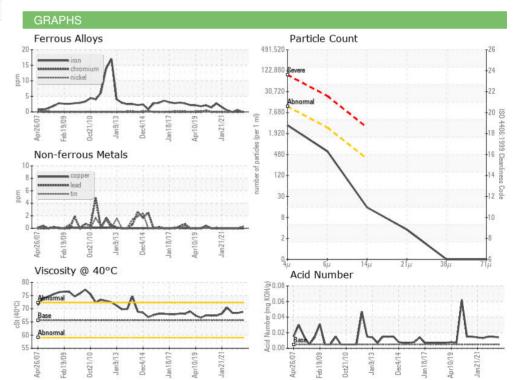





Certificate 12367

Laboratory Sample No.

Test Package : IND 2

: USP0007925 Lab Number : 06139914 Unique Number : 10964722

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 05 Apr 2024

Tested : 08 Apr 2024 Diagnosed : 08 Apr 2024 - Doug Bogart

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: MIKE QUEEN T: (336)838-2171

TYSON FRESH PLANT

704 FACTORY ST

WILKESBORO, NC

Contact/Location: MIKE QUEEN - TYSWILFRE

Report Id: TYSWILFRE [WUSCAR] 06139914 (Generated: 04/08/2024 10:03:45) Rev: 1

US 28697

F: