


OIL ANALYSIS REPORT

Area
ER-4
Machine Id
4MC2 (S/N V1751)
Component

Refrigeration Compressor

USPI ALT-68 SC (--- GAL)



Sample Rating Trend



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 6 microns in size) present in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	ATION	mathad	limit/base	ourront.	biotomit	hiotom/0
	IATION	method	iiiiiivbase	current	history1	history2
Sample Number		Client Info		USP0008015	USP0005022	USP249696
Sample Date		Client Info		28 Mar 2024	02 Jan 2024	22 Mar 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ATTENTION	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0	2	<1
Chromium	ppm	ASTM D5185m	>2	0	<1	0
Nickel	ppm	ASTM D5185m		<1	0	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	<1	0	0
Lead	ppm	ASTM D5185m	>2	0	0	0
Copper	ppm	ASTM D5185m	>8	0	<1	<1
Tin	ppm	ASTM D5185m	>4	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m		<1	0	0
Calcium	ppm	ASTM D5185m		0	0	<1
Phosphorus	ppm	ASTM D5185m		0	0	0
Zinc	ppm	ASTM D5185m		0	0	2
Sulfur	ppm	ASTM D5185m	50	0	0	6
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	2	<1
Sodium	ppm	ASTM D5185m	710	0	2	1
Potassium	ppm	ASTM D5185m	>20	<1	<1	0
Water	%	ASTM D6304	>0.01	0.003	0.002	0.005
ppm Water	ppm	ASTM D6304	>100	36	20	51.0
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647	>10000	12633	<u>22254</u>	<u>^</u> 29748
Particles >6µm		ASTM D7647	>2500	2058	<u>▲</u> 6474	2113
Particles >14µm		ASTM D7647	>320	49	317	22
Particles >21µm		ASTM D7647	>80	8	49	6
Particles >38µm		ASTM D7647	>20	0	0	1
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<u>21/18/13</u>	<u>22/20/15</u>	<u>^</u> 22/18/12
FLUID DEGRADA	TION	method	limit/base	current	history1	history2





OIL ANALYSIS REPORT













VISUAL						
White Metal	scalar	*Visual	NONE	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.01	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	TES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	65.6	65.5	65.6	65.5

_			
SAMPLE IMAGES			

Color





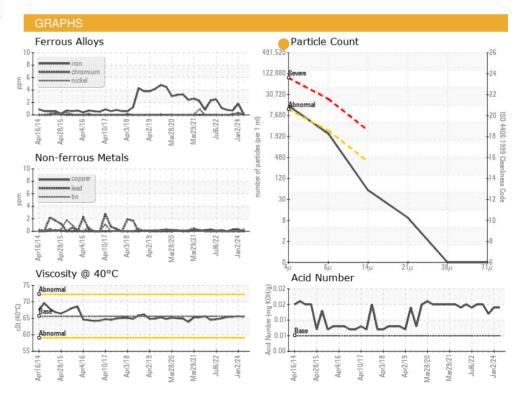





Laboratory Sample No.

Lab Number : 06139954 Unique Number : 10964762

: USP0008015

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 05 Apr 2024

Tested : 08 Apr 2024

Diagnosed : 08 Apr 2024 - Doug Bogart

Test Package : IND 2 Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

RUSSELLVILLE, AR US

CONAGRA FROZEN FOODS CO

Contact: SERVICE MANAGER

Contact/Location: SERVICE MANAGER ? - CONRUS

T:

F: