

OIL ANALYSIS REPORT

Area ENG RM 4 4B5 (S/N 03913-005-1-01-02)

Refrigeration Compressor

USPI ALT-68 SC (--- GAL)

DIAGNOSIS

A Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Jec2019 Jul2	020 Jan2021 Jun2021	Dec2021 Jul2022 Dec2022	Jan2024	
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0008026	USP0005029	USP249691
Sample Date		Client Info		28 Mar 2024	02 Jan 2024	22 Mar 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	2	6	2
Chromium	ppm	ASTM D5185m	>2	0	<1	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	<1	0	0
Lead	ppm	ASTM D5185m	>2	0	0	0
Copper	ppm	ASTM D5185m	>8	0	0	0
Tin	ppm	ASTM D5185m	>4	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m		<1	0	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		0	0	0
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m	50	0	0	0
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon		ASTM D5185m	<15 <	0	<1	<1
Sodium	ppm ppm	ASTM D5185m	>10	0	0	<1
Potassium		ASTM D5185m	>20	۰ <1	<1	0
Water	ppm %	ASTM D5105III		0.003	0.003	0.00
ppm Water	ppm	ASTM D0304 ASTM D6304	>100	31	38	0.00
FLUID CLEANLIN		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	▲ 25404	▲ 117669	▲ 22836
Particles >6µm		ASTM D7647 ASTM D7647		23404 5896	▲ 22266	2892
Particles >14µm		ASTM D7647 ASTM D7647	>320	65	307	12
Particles >21µm		ASTM D7647 ASTM D7647		7	27	4
Particles >38µm		ASTM D7647 ASTM D7647	>20	1	0	4
Particles >71µm		ASTM D7647 ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>4 >20/18/15	0 <u> 22/20/13</u>	0 ▲ 24/22/15	22/19/11
	TION	()				
FLUID DEGRADA	mg KOH/g	method ASTM D974	limit/base	current	history1	history2
Acid Number (AN)				0.014	0.014	0.011


Sample Rating Trend


ISO





OIL ANALYSIS REPORT

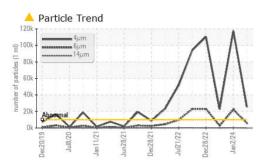










VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.01	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	65.6	65.1	65.1	64.7
SAMPLE IMAGES m		method	limit/base	current	history1	history2
Color				•		NH3 455 WC ID: 3350 C.(2005
					17 and	

Bottom

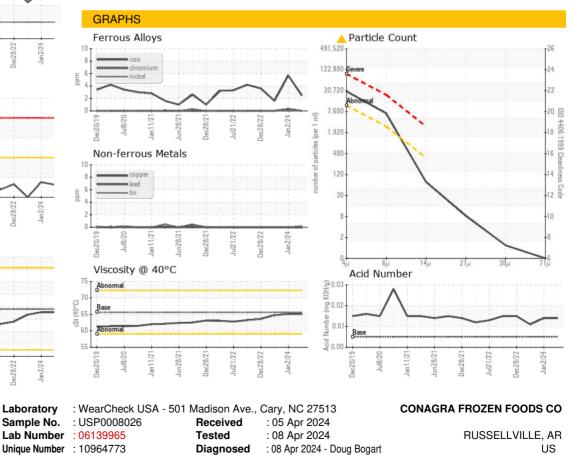

Test Package : IND 2

- To discuss this sample report, contact Customer Service at 1-800-237-1369.
- * Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F:

Certificate 12367

Contact/Location: SERVICE MANAGER ? - CONRUS

Contact: SERVICE MANAGER