




OIL ANALYSIS REPORT

Area
Building 12
 Machine Id
Cone 2A
 Component
Bulk Tank Lube System
 Fluid
MOBIL MOBILGEAR 600 XP 320 (105 GAL)

Sample Rating Trend

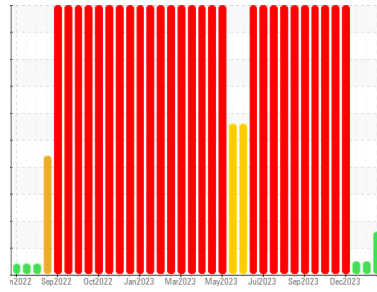

DIAGNOSIS

Recommendation
 No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear
 Bearing and/or gear wear is indicated.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0901930	WC0901962	WC0901965
Sample Date	Client Info		22 Feb 2024	05 Feb 2024	24 Jan 2024
Machine Age	hrs	Client Info	735	735	735
Oil Age	hrs	Client Info	735	735	735
Oil Changed	Client Info		Filtered	Filtered	Filtered
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.05	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	▲ 50	▲ 88	▲ 80
Chromium	ppm	ASTM D5185m >20	0	0	0
Nickel	ppm	ASTM D5185m >20	0	<1	0
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >20	4	3	3
Lead	ppm	ASTM D5185m >20	17	▲ 35	▲ 28
Copper	ppm	ASTM D5185m >20	▲ 43	▲ 38	▲ 31
Tin	ppm	ASTM D5185m >20	5	6	5
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	23	25	26
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0
Manganese	ppm	ASTM D5185m	<1	1	1
Magnesium	ppm	ASTM D5185m	2	2	2
Calcium	ppm	ASTM D5185m	1	1	<1
Phosphorus	ppm	ASTM D5185m	294	270	278
Zinc	ppm	ASTM D5185m	0	0	<1
Sulfur	ppm	ASTM D5185m	17402	16355	16574

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	10	7	8
Sodium	ppm	ASTM D5185m	2	2	2
Potassium	ppm	ASTM D5185m >20	<1	<1	0


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.83	0.72	0.84




OIL ANALYSIS REPORT


Non-ferrous Metals

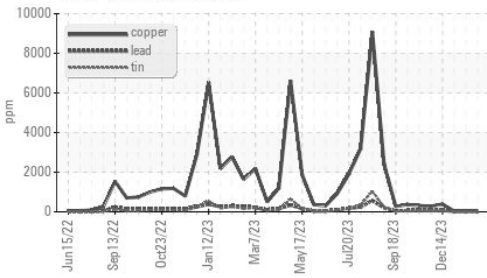


Ferrous Alloys

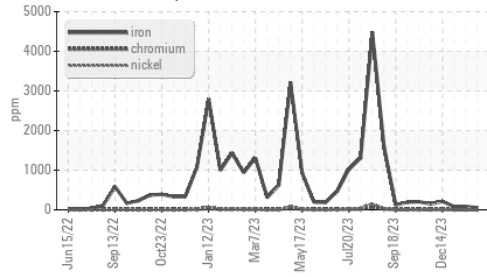

Acid Number

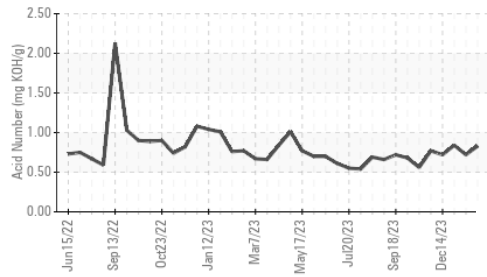


Viscosity @ 40°C

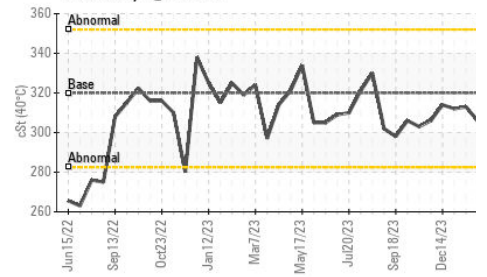

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	MODER	▲ LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	320	306	313	312

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

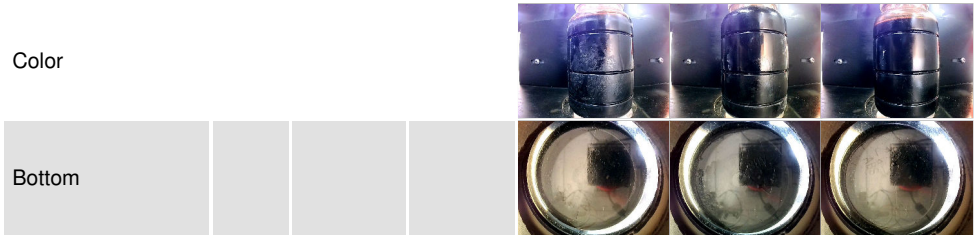


GRAPHS


Ferrous Alloys

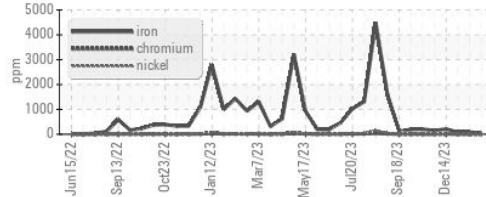


Non-ferrous Metals

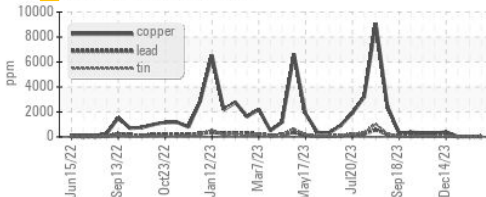

Viscosity @ 40°C

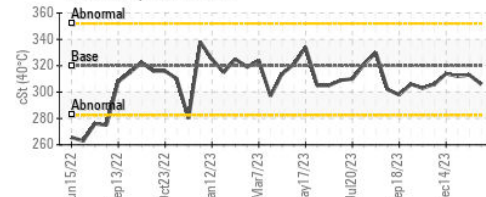

Acid Number

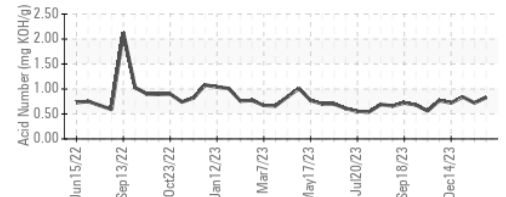

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0901930

Lab Number : 06140063

Unique Number : 10964871

Test Package : IND 2

Received : 05 Apr 2024

Tested : 08 Apr 2024

Diagnosed : 08 Apr 2024 - Don Baldrige

3M - PITTSBORO

4191 NC 87 S

MONCURE, NC

US 27559

Contact: CHARLES JARRELL

cjarrell@mmm.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)