


OIL ANALYSIS REPORT

Sample Rating Trend

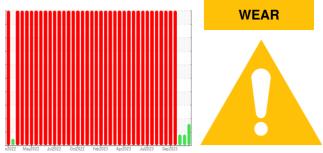

Area Building 12 Cone 1 Component Bulk Tank Lube System Fluid Mobilgear 629 (105 GAL)

DIAGNOSIS

A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

📥 Wear

Bearing and/or gear wear is indicated.

Contamination

There is no indication of any contamination in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0901964	WC0882553	WC0882574
Sample Date		Client Info		24 Jan 2024	14 Dec 2023	25 Nov 2023
Machine Age	hrs	Client Info		1340	1340	1340
Oil Age	hrs	Client Info		1340	449	1340
Oil Changed		Client Info		Filtered	Filtered	Filtered
Sample Status				ABNORMAL	ABNORMAL	MARGINAL
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	4 25	18	17
Chromium	ppm	ASTM D5185m	>20	0	0	0
Nickel	ppm	ASTM D5185m	>20	0	<1	<1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>20	4	4	3
Lead	ppm	ASTM D5185m	>20	18	19	18
Copper	ppm	ASTM D5185m	>20	<mark>/</mark> 82	125	1 13
Tin	ppm	ASTM D5185m	>20	5	6	6
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		14	16	18
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		1	1	1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		6	8	8
Calcium	ppm	ASTM D5185m		15	19	19
Phosphorus	ppm	ASTM D5185m		251	284	299
Zinc	ppm	ASTM D5185m		13	16	16
Sulfur	ppm	ASTM D5185m		16072	13520	13782
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	11	14	11
Sodium	ppm	ASTM D5185m		2	3	2
Potassium	ppm	ASTM D5185m	>20	<1	2	1
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.82	0.76	0.75




OIL ANALYSIS REPORT

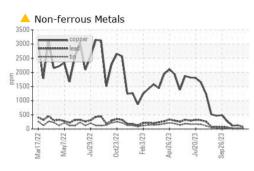








VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	MODER	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	150	141	141	142
SAMPLE IMAGES		method	limit/base	current	history1	history2
				24 CONC		

Color



Bottom

GRAPHS

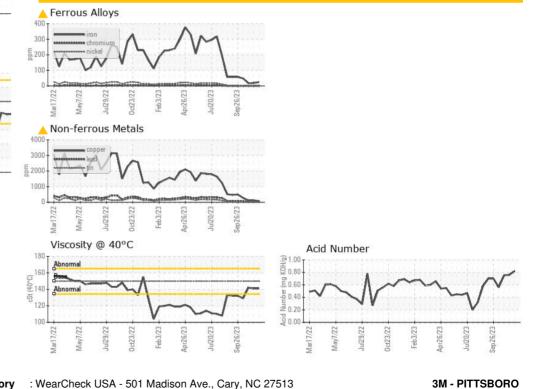

Laboratory Sample No. : WC0901964 Received : 05 Apr 2024 4191 NC 87 S Lab Number : 06140071 Tested : 08 Apr 2024 MONCURE, NC Unique Number : 10964879 Diagnosed : 08 Apr 2024 - Don Baldridge US 27559 Test Package : IND 2 Contact: CHARLES JARRELL Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369. cjarrell@mmm.com * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T: Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F:

Submitted By: JORDAN TUTEN Page 2 of 2