




# OIL ANALYSIS REPORT

Sample Rating Trend

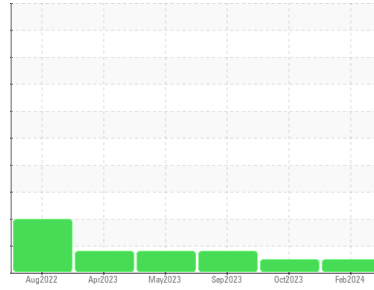

**NORMAL**



Area

**Building 13**

Machine Id

**Conveyor 9**

Component

**Drive End Conveyor Gearbox**

Fluid

**SCHAEFFER 293A SUPREME GEAR LUBE NO TACK 220 (39 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: Top Up Amount: GAL )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0901958</b>	WC0853770	WC0853800
Sample Date	Client Info		<b>29 Feb 2024</b>	25 Oct 2023	04 Sep 2023
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	389	0
Oil Changed	Client Info		<b>Oil Added</b>	Oil Added	Not Changd
Sample Status			<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	<b>139</b>	145	▲ 340
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	2
Nickel	ppm	ASTM D5185m >10	<b>0</b>	<1	1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	<b>4</b>	4	11
Lead	ppm	ASTM D5185m	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	<b>3</b>	1	2
Tin	ppm	ASTM D5185m	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>20</b>	28	136
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>204</b>	247	366
Manganese	ppm	ASTM D5185m	<b>2</b>	2	3
Magnesium	ppm	ASTM D5185m	<b>&lt;1</b>	1	5
Calcium	ppm	ASTM D5185m	<b>&lt;1</b>	3	5
Phosphorus	ppm	ASTM D5185m	<b>534</b>	549	1037
Zinc	ppm	ASTM D5185m	<b>0</b>	0	0
Sulfur	ppm	ASTM D5185m	<b>22472</b>	18325	27232

## CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	<b>16</b>	14	20
Sodium	ppm	ASTM D5185m	<b>1</b>	<1	3
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0	<1

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>1.15</b>	1.25	3.26




# OIL ANALYSIS REPORT

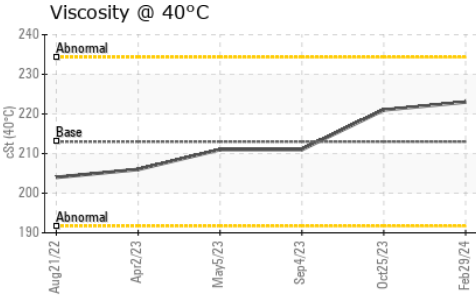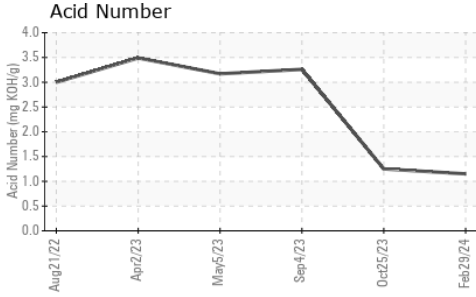





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	MODER	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	MODER	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 213	<b>223</b>	221	211

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

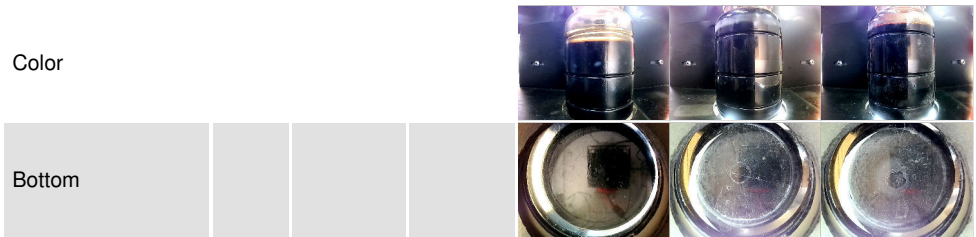

## GRAPHS

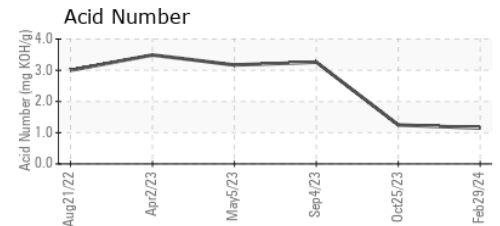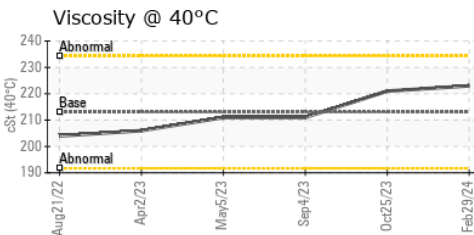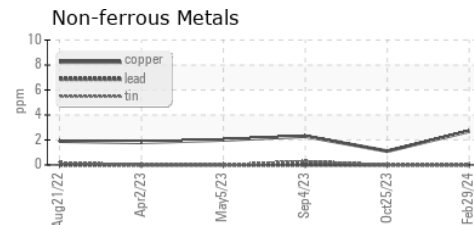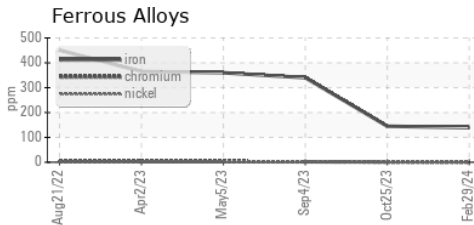

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0901958      **Received** : 05 Apr 2024  
**Lab Number** : **06140077**      **Tested** : 08 Apr 2024  
**Unique Number** : 10964885      **Diagnosed** : 08 Apr 2024 - Don Baldrige  
**Test Package** : IND 2

**3M - PITTSBORO**  
 4191 NC 87 S  
 MONCURE, NC  
 US 27559

Contact: CHARLES JARRELL  
cjarrell@mmm.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)