




# OIL ANALYSIS REPORT

Sample Rating Trend

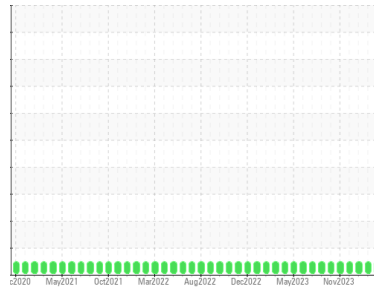

**NORMAL**



Area

**Paul G. Blazer**

Machine Id

**[Paul G. Blazer] Oil - Port Main Engine**

Component

**Port Main Engine**

Fluid

**DIESEL ENGINE OIL SAE 15W40 (150 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0719534</b>	WC0845911	WC0845763
Sample Date	Client Info		<b>20 Mar 2024</b>	10 Feb 2024	25 Jan 2024
Machine Age	hrs	Client Info	<b>72861</b>	72018	71665
Oil Age	hrs	Client Info	<b>5660</b>	4816	4464
Oil Changed	Client Info		<b>N/A</b>	Not Changd	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	<b>11</b>	11	10
Chromium	ppm	ASTM D5185m >8	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m >3	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >15	<b>2</b>	1	2
Lead	ppm	ASTM D5185m >18	<b>0</b>	<1	3
Copper	ppm	ASTM D5185m >80	<b>1</b>	<1	2
Tin	ppm	ASTM D5185m >14	<b>0</b>	0	1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>36</b>	48	55
Barium	ppm	ASTM D5185m 10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 100	<b>71</b>	67	68
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	2
Magnesium	ppm	ASTM D5185m 450	<b>1381</b>	1332	1249
Calcium	ppm	ASTM D5185m 3000	<b>1270</b>	1349	1264
Phosphorus	ppm	ASTM D5185m 1150	<b>982</b>	974	913
Zinc	ppm	ASTM D5185m 1350	<b>1198</b>	1190	1115
Sulfur	ppm	ASTM D5185m 4250	<b>3624</b>	3188	2951

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>2</b>	3	3
Sodium	ppm	ASTM D5185m >158	<b>1</b>	<1	3
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0	4

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>2.2</b>	2.1	2
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.7</b>	9.7	9.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.9</b>	22.9	22.6


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.0</b>	16.8	16.6
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>12.45</b>	12.09	12.26




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

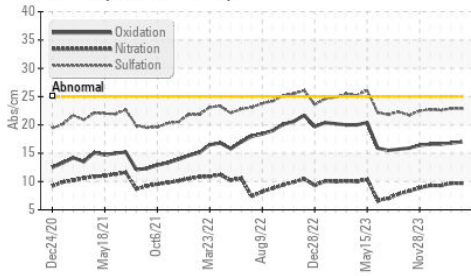

Base Number

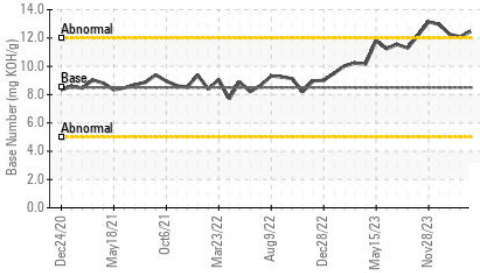

Viscosity @ 100°C

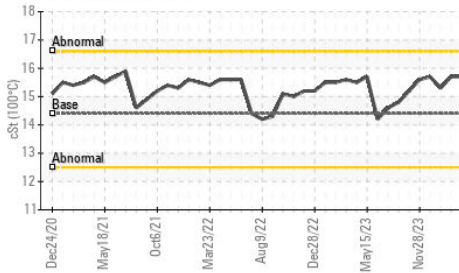


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	15.7	15.7

## GRAPHS


Ferrous Alloys

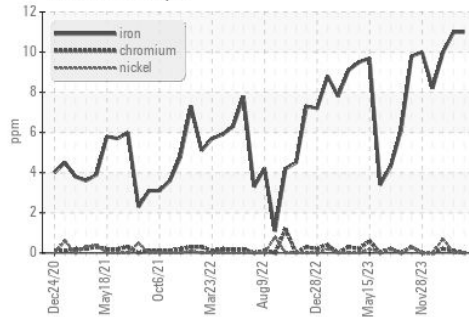


Non-ferrous Metals

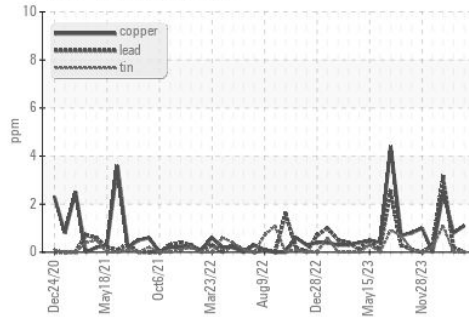

Viscosity @ 100°C

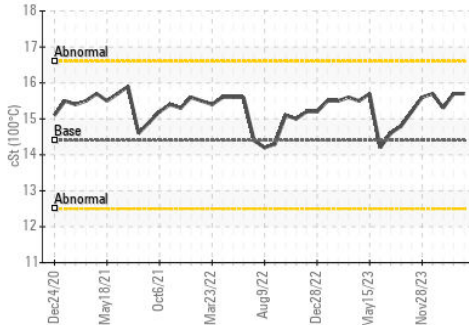

Base Number

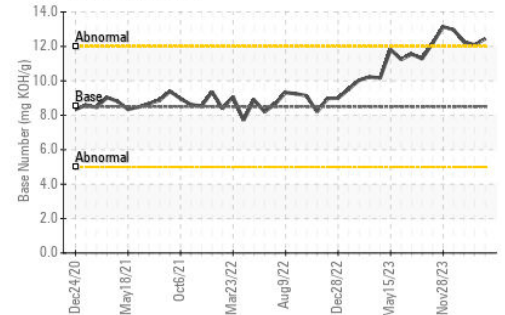

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0719534

Lab Number : 06140105

Unique Number : 10964913

Test Package : IND 2

Received : 05 Apr 2024

Tested : 08 Apr 2024

Diagnosed : 09 Apr 2024 - Sean Felton

MARATHON PETROLEUM CO.

101 12TH ST

CATLETTSBURG, KY

US 41169

Contact: CORY GUMBERT

cagumbert@marathonpetroleum.com

T: (606)585-3950

F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)