




OIL ANALYSIS REPORT

Sample Rating Trend

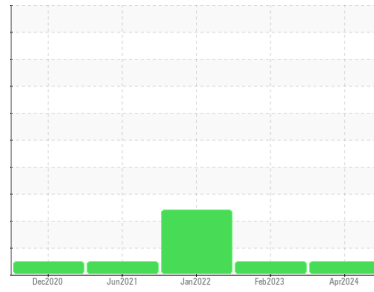

NORMAL



Area

DUMP TRUCK

Machine Id

FREIGHTLINER V065

Component

Diesel Engine

Fluid

HIGH PERFORMANCE LUBRICANTS HDMO 15W40 (20 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		HPL0002268	HPL0000636	RP0012231
Sample Date	Client Info		02 Apr 2024	13 Feb 2023	18 Jan 2022
Machine Age	hrs	Client Info	7727	7102	7102
Oil Age	hrs	Client Info	397	197	653
Oil Changed	Client Info		Not Changed	Not Changed	Not Changed
Sample Status			NORMAL	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	35	23	35
Chromium	ppm	ASTM D5185m >5	2	1	2
Nickel	ppm	ASTM D5185m >2	0	0	0
Titanium	ppm	ASTM D5185m	0	0	<1
Silver	ppm	ASTM D5185m >3	0	0	<1
Aluminum	ppm	ASTM D5185m >30	11	2	6
Lead	ppm	ASTM D5185m >30	3	4	4
Copper	ppm	ASTM D5185m >150	7	5	10
Tin	ppm	ASTM D5185m >5	<1	0	<1
Antimony	ppm	ASTM D5185m	---	---	0
Vanadium	ppm	ASTM D5185m	0	<1	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 200	156	189	118
Barium	ppm	ASTM D5185m	0	2	2
Molybdenum	ppm	ASTM D5185m 85	711	702	521
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 525	453	397	368
Calcium	ppm	ASTM D5185m 4300	3887	3783	3784
Phosphorus	ppm	ASTM D5185m 1000	882	834	982
Zinc	ppm	ASTM D5185m 1100	1047	1004	1195
Sulfur	ppm	ASTM D5185m 20200	20659	17533	12670

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	14	15	22
Sodium	ppm	ASTM D5185m	11	8	18
Potassium	ppm	ASTM D5185m >20	3	2	6

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.6	0.3	0.7
Nitration	Abs/cm	*ASTM D7624 >20	13.8	10.5	15.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	34.4	30.1	36.5


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	24.4	20.0	28.2
Base Number (BN)	mg KOH/g	ASTM D2896 14.5	11.57	14.41	9.51




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

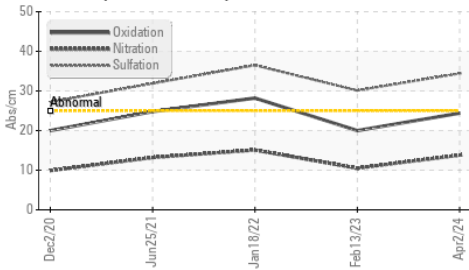

Base Number

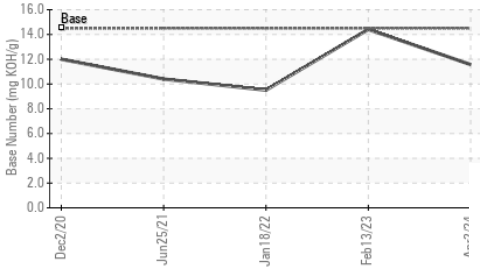









Viscosity @ 100°C

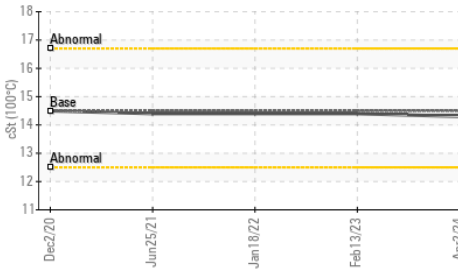

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.5	14.3	14.4

GRAPHS

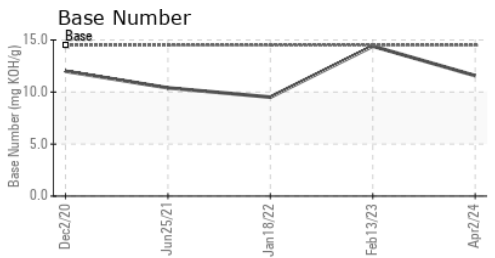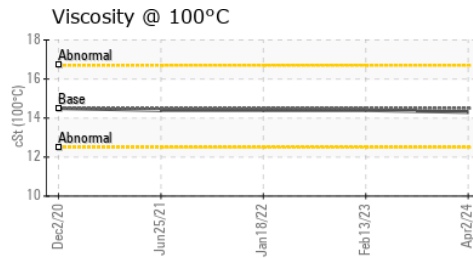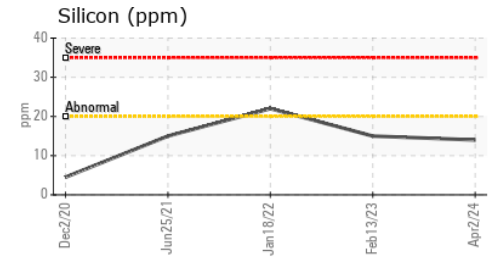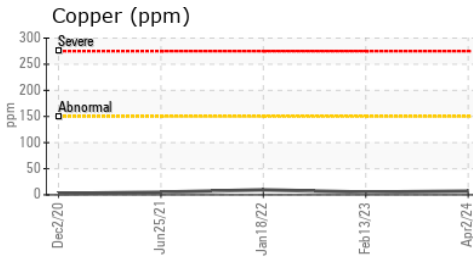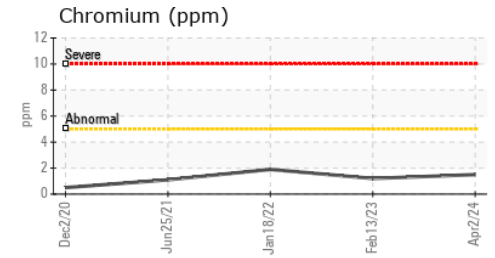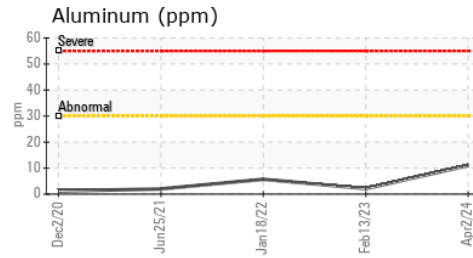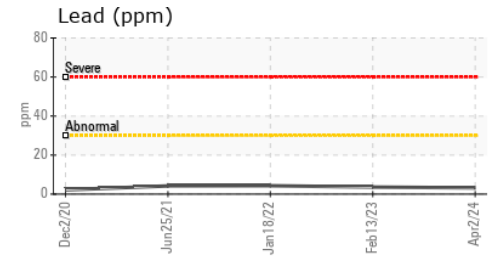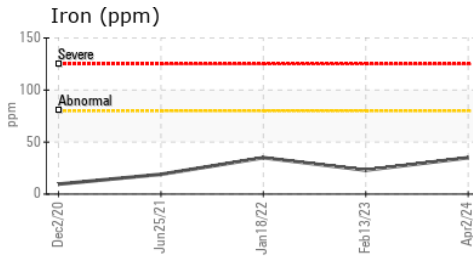

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : HPL0002268
Lab Number : 06140112
Unique Number : 10964920
Test Package : MOB 2
Received : 05 Apr 2024
Tested : 08 Apr 2024
Diagnosed : 08 Apr 2024 - Don Baldrige

MUSCATINE POWER AND WATER
 3205 CEDAR STREET
 MUSCATINE, IA
 US 52761
 Contact: JUSTIN CONKLIN
 justin.conklin@mpw.org
 T: (563)262-3351
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)