




# OIL ANALYSIS REPORT

## Sample Rating Trend

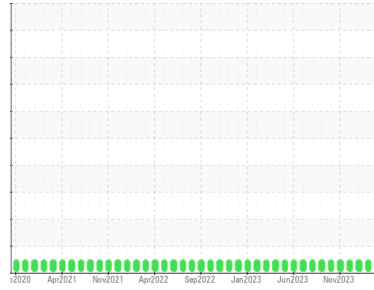

**NORMAL**



Area

**Detroit**

Machine Id

**[Detroit] Oil - Port Main Engine**

Component

**Port Main Engine**

Fluid

**MOBIL 15W40 (150 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: Chris Wray )

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0804777</b>	WC0804829	WC0804828
Sample Date	Client Info			<b>25 Mar 2024</b>	05 Feb 2024	01 Jan 2024
Machine Age	hrs	Client Info		<b>19472</b>	18361	17601
Oil Age	hrs	Client Info		<b>11055</b>	9945	9184
Oil Changed	Client Info			<b>Not Chngd</b>	Not Chngd	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>4.0		<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>75	<b>59</b>	68	61
Chromium	ppm	ASTM D5185m	>8	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	1
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>15	<b>3</b>	2	3
Lead	ppm	ASTM D5185m	>18	<b>21</b>	22	22
Copper	ppm	ASTM D5185m	>80	<b>13</b>	12	14
Tin	ppm	ASTM D5185m	>14	<b>2</b>	2	3
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	<1

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>64</b>	63	64
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>43</b>	48	51
Manganese	ppm	ASTM D5185m		<b>1</b>	<1	3
Magnesium	ppm	ASTM D5185m		<b>689</b>	783	787
Calcium	ppm	ASTM D5185m		<b>2090</b>	1984	1831
Phosphorus	ppm	ASTM D5185m		<b>844</b>	930	896
Zinc	ppm	ASTM D5185m		<b>1027</b>	1171	1140
Sulfur	ppm	ASTM D5185m		<b>3950</b>	3380	3027

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>3</b>	4	4
Sodium	ppm	ASTM D5185m	>118	<b>5</b>	5	7
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	1	5
Water	%	ASTM D6304	>0.1	<b>NEG</b>	NEG	NEG


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		<b>0.5</b>	0.5	0.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>15.2</b>	15.2	14.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>29.5</b>	30.1	29.4

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>35.5</b>	36.6	34.8
Base Number (BN)	mg KOH/g	ASTM D2896		<b>6.94</b>	6.79	5.96




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

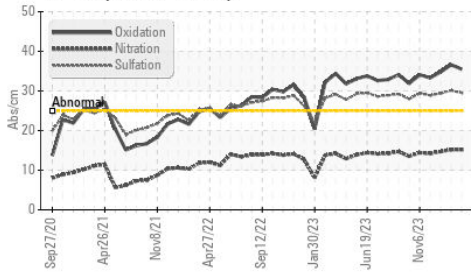


Water (KF)

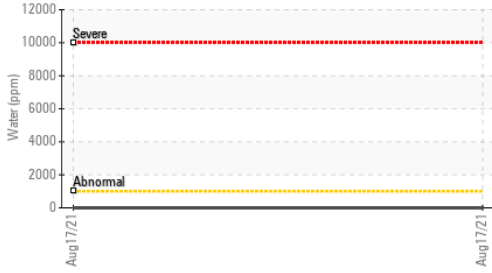

Viscosity @ 100°C

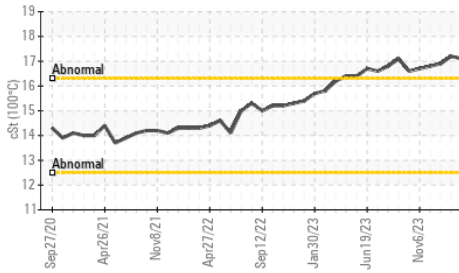

Water (KF)

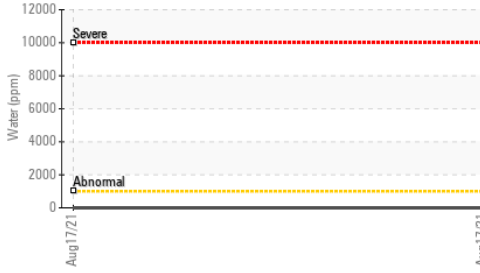


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	17.1	17.2	16.9

## GRAPHS


Ferrous Alloys

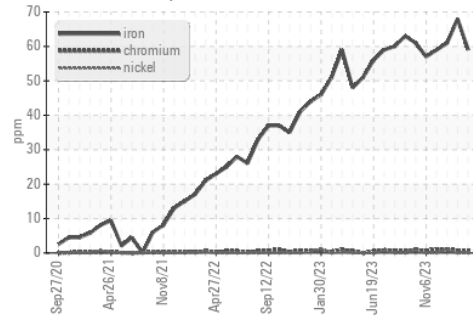


Non-ferrous Metals

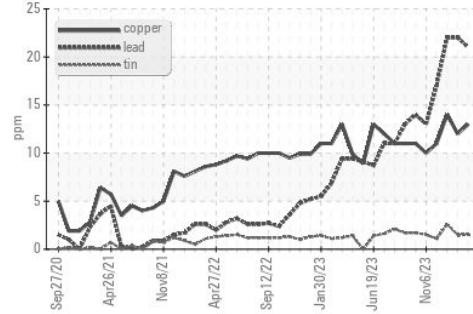

Viscosity @ 100°C

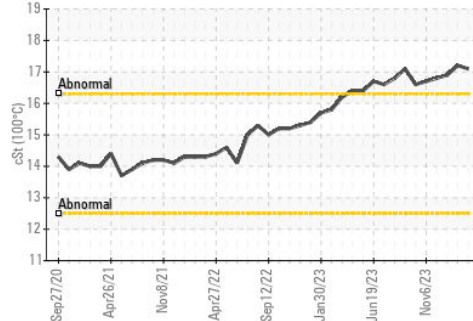

Base Number

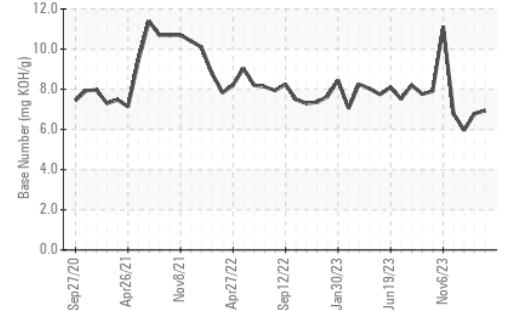

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0804777

Lab Number : 06140125

Unique Number : 10964933

Test Package : IND 2 ( Additional Tests: KF )

Received : 05 Apr 2024

Tested : 09 Apr 2024

Diagnosed : 09 Apr 2024 - Sean Felton

MARATHON PETROLEUM CO.

101 12TH ST

CATLETTSBURG, KY

US 41169

Contact: CORY GUMBERT

cagumbert@marathonpetroleum.com

T: (606)585-3950

F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)