

Machine Id

VOLVO EC140E 315905

Component

Left Travel

Fluid

VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)



DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

The tin level is abnormal. All other metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		ASC0000900	---	---
Sample Date	Client Info		01 Apr 2024	---	---
Machine Age	hrs	Client Info	554	---	---
Oil Age	hrs	Client Info	554	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.25	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >1200	414	---	---
Chromium	ppm	ASTM D5185m >20	7	---	---
Nickel	ppm	ASTM D5185m >5	0	---	---
Titanium	ppm	ASTM D5185m	0	---	---
Silver	ppm	ASTM D5185m	0	---	---
Aluminum	ppm	ASTM D5185m >100	<1	---	---
Lead	ppm	ASTM D5185m >50	0	---	---
Copper	ppm	ASTM D5185m >50	3	---	---
Tin	ppm	ASTM D5185m >5	▲ 43	---	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 111	0	---	---
Barium	ppm	ASTM D5185m 0.0	1	---	---
Molybdenum	ppm	ASTM D5185m 0.9	0	---	---
Manganese	ppm	ASTM D5185m 0.0	6	---	---
Magnesium	ppm	ASTM D5185m 39	2	---	---
Calcium	ppm	ASTM D5185m 93	25	---	---
Phosphorus	ppm	ASTM D5185m 920	326	---	---
Zinc	ppm	ASTM D5185m 104	26	---	---
Sulfur	ppm	ASTM D5185m 20179	18721	---	---



CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >100	10	---	---
Sodium	ppm	ASTM D5185m	4	---	---
Potassium	ppm	ASTM D5185m >20	0	---	---

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	---	---
Yellow Metal	scalar	*Visual NONE	NONE	---	---
Precipitate	scalar	*Visual NONE	NONE	---	---
Silt	scalar	*Visual NONE	MODER	---	---
Debris	scalar	*Visual NONE	NONE	---	---
Sand/Dirt	scalar	*Visual NONE	NONE	---	---
Appearance	scalar	*Visual NORML	NORML	---	---
Odor	scalar	*Visual NORML	NORML	---	---
Emulsified Water	scalar	*Visual >0.25	NEG	---	---
Free Water	scalar	*Visual	NEG	---	---

OIL ANALYSIS REPORT

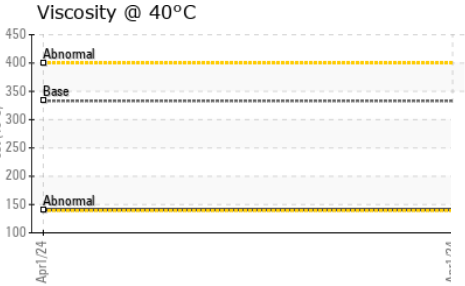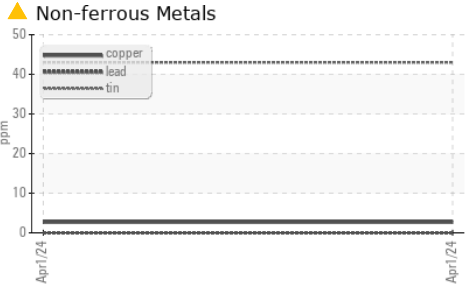









FLUID PROPERTIES

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 333	141	---	---

SAMPLE IMAGES

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

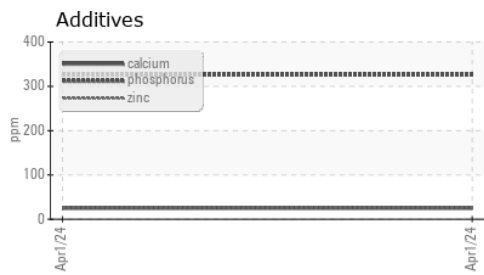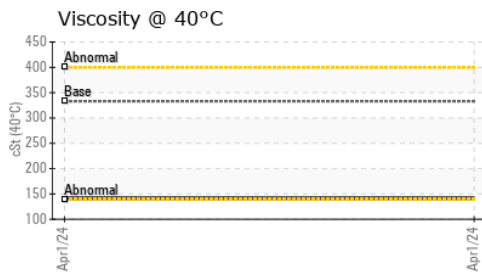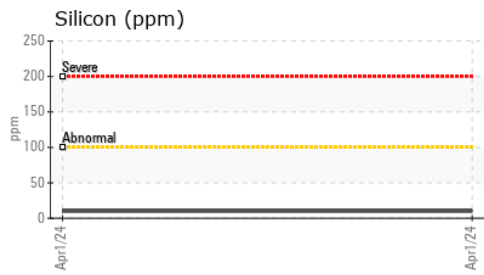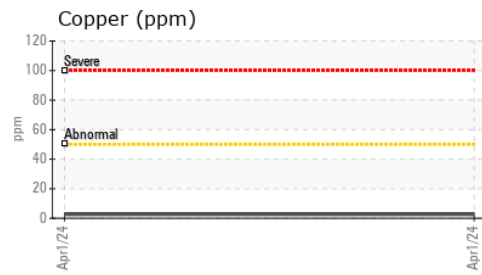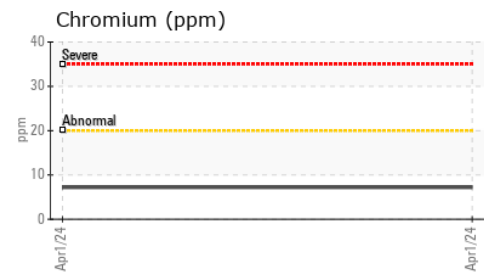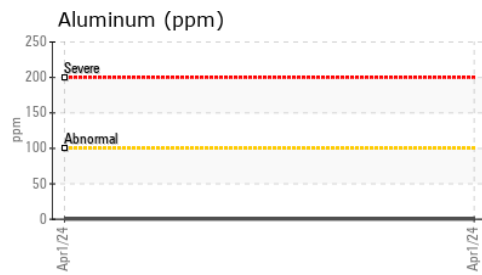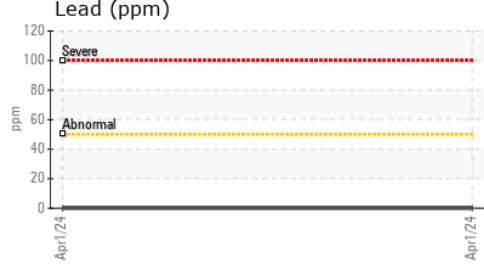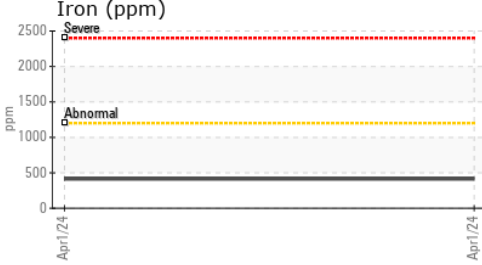

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC000900 **Received** : 05 Apr 2024
Lab Number : **06140277** **Tested** : 08 Apr 2024
Unique Number : 10965085 **Diagnosed** : 09 Apr 2024 - Don Baldrige
Test Package : MOBCE

CAROLINA EXCAVATING
 1036 BRANCHVIEW DR, SUITE 106
 CONCORD, NC
 US 28025
 Contact: KEVIN LADGERWOOD
 kevin@carlinaexcavation.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: