




# OIL ANALYSIS REPORT

Area  
**OKLAHOMA/3**  
 Machine Id  
**39.63 [OKLAHOMA^3]**  
 Component  
**Right Final Drive**  
 Fluid  
**MOBIL MOBILTRANS HD 50 (--- GAL)**

Sample Rating Trend

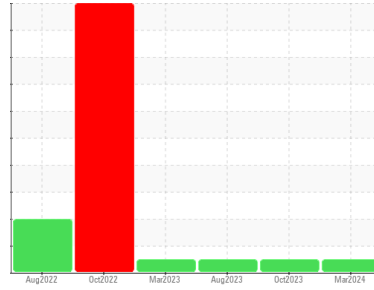

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0874013</b>	WC0857243	WC0833958
Sample Date	Client Info		<b>18 Mar 2024</b>	19 Oct 2023	24 Aug 2023
Machine Age	hrs	Client Info	<b>5377</b>	4226	3833
Oil Age	hrs	Client Info	<b>5377</b>	4085	3613
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >800	<b>765</b>	566	598
Chromium	ppm	ASTM D5185m >10	<b>10</b>	8	8
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m >15	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >75	<b>7</b>	2	3
Lead	ppm	ASTM D5185m >10	<b>1</b>	<1	1
Copper	ppm	ASTM D5185m >75	<b>6</b>	6	6
Tin	ppm	ASTM D5185m >8	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>49</b>	58	57
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>3</b>	3	3
Manganese	ppm	ASTM D5185m	<b>10</b>	8	9
Magnesium	ppm	ASTM D5185m	<b>24</b>	20	24
Calcium	ppm	ASTM D5185m	<b>2030</b>	1781	1896
Phosphorus	ppm	ASTM D5185m	<b>805</b>	705	709
Zinc	ppm	ASTM D5185m	<b>744</b>	627	718
Sulfur	ppm	ASTM D5185m	<b>12132</b>	10083	11635

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >400	<b>38</b>	15	9
Sodium	ppm	ASTM D5185m	<b>6</b>	5	5
Potassium	ppm	ASTM D5185m >20	<b>10</b>	9	9

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	LIGHT
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG



# OIL ANALYSIS REPORT



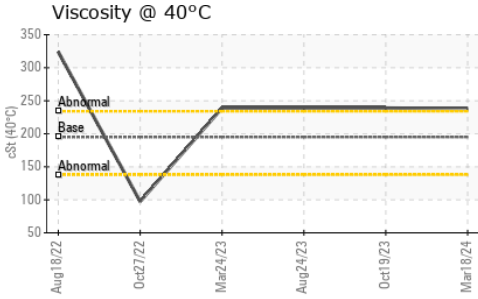


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	195	<b>238</b>	239	239

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color	no image	no image	no image
Bottom	no image	no image	no image

## GRAPHS

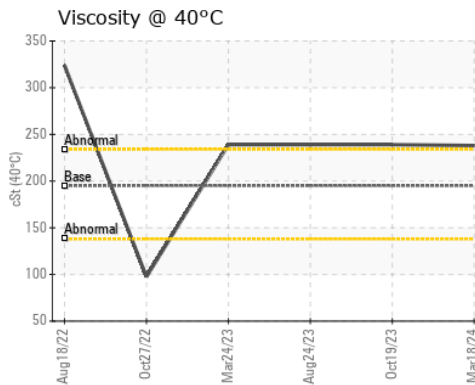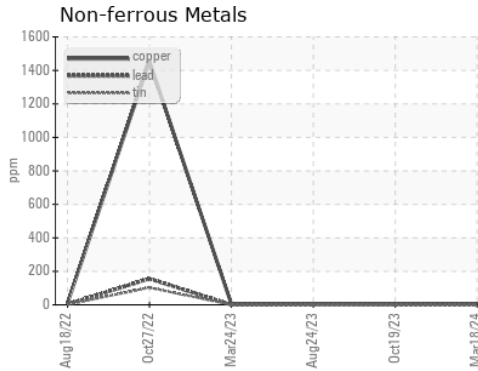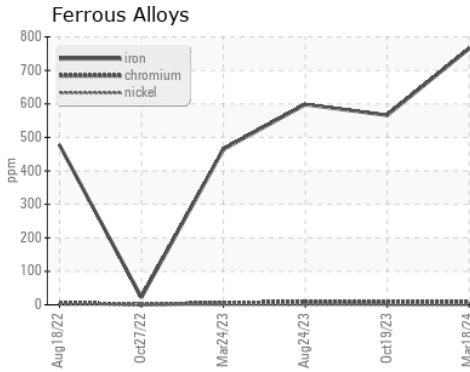

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0874013  
**Lab Number** : 06140320  
**Unique Number** : 10965128  
**Test Package** : CONST  
**Received** : 05 Apr 2024  
**Tested** : 08 Apr 2024  
**Diagnosed** : 09 Apr 2024 - Don Baldrige

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: SHAWN SOUTH  
 shawn.south@sherwood.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x

F: x