

**NORMAL**



Machine Id

**B698**

Component

**Hydraulic System**

Fluid

**AW HYDRAULIC OIL ISO 46 (--- QTS)**

**DIAGNOSIS**

**Recommendation**

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The condition of the oil is acceptable for the time in service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2    |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info |             |            | <b>HRE0000027</b>  | WCI1107039  | WCI1102966  |
| Sample Date        | Client Info |             |            | <b>06 Apr 2024</b> | 22 Oct 2017 | 09 Nov 2016 |
| Machine Age        | hrs         | Client Info |            | <b>0</b>           | 0           | 0           |
| Oil Age            | hrs         | Client Info |            | <b>0</b>           | 0           | 0           |
| Oil Changed        | Client Info |             |            | <b>N/A</b>         | N/A         | N/A         |
| Sample Status      |             |             |            | <b>NORMAL</b>      | NORMAL      | NORMAL      |

| CONTAMINATION |           | method | limit/base | current    | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water         | WC Method |        | >0.05      | <b>NEG</b> | NEG      | NEG      |


| WEAR METALS |     | method      | limit/base | current    | history1 | history2 |
|-------------|-----|-------------|------------|------------|----------|----------|
| Iron        | ppm | ASTM D5185m | >20        | <b>8</b>   | 6        | 4        |
| Chromium    | ppm | ASTM D5185m | >20        | <b>2</b>   | 4        | 4        |
| Nickel      | ppm | ASTM D5185m | >20        | <b>0</b>   | <1       | <1       |
| Titanium    | ppm | ASTM D5185m |            | <b>0</b>   | 0        | 0        |
| Silver      | ppm | ASTM D5185m |            | <b>0</b>   | 0        | 0        |
| Aluminum    | ppm | ASTM D5185m | >20        | <b>0</b>   | <1       | 0        |
| Lead        | ppm | ASTM D5185m | >20        | <b>0</b>   | <1       | 1        |
| Copper      | ppm | ASTM D5185m | >20        | <b>3</b>   | 12       | 12       |
| Tin         | ppm | ASTM D5185m | >20        | <b>0</b>   | 2        | 4        |
| Antimony    | ppm | ASTM D5185m |            | <b>---</b> | 0        | 0        |
| Vanadium    | ppm | ASTM D5185m |            | <b>0</b>   | 0        | 0        |
| Cadmium     | ppm | ASTM D5185m |            | <b>0</b>   | 0        | 0        |

| ADDITIVES  |     | method      | limit/base | current     | history1 | history2 |
|------------|-----|-------------|------------|-------------|----------|----------|
| Boron      | ppm | ASTM D5185m | 5          | <b>0</b>    | 7        | 8        |
| Barium     | ppm | ASTM D5185m | 5          | <b>0</b>    | 0        | 0        |
| Molybdenum | ppm | ASTM D5185m | 5          | <b>0</b>    | 2        | 2        |
| Manganese  | ppm | ASTM D5185m |            | <b>0</b>    | <1       | <1       |
| Magnesium  | ppm | ASTM D5185m | 25         | <b>2</b>    | 3        | 6        |
| Calcium    | ppm | ASTM D5185m | 200        | <b>42</b>   | 70       | 74       |
| Phosphorus | ppm | ASTM D5185m | 300        | <b>299</b>  | 281      | 303      |
| Zinc       | ppm | ASTM D5185m | 370        | <b>344</b>  | 348      | 348      |
| Sulfur     | ppm | ASTM D5185m | 2500       | <b>3650</b> | 1520     | 1621     |





| CONTAMINANTS |     | method      | limit/base | current  | history1 | history2 |
|--------------|-----|-------------|------------|----------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >15        | <b>1</b> | 1        | 1        |
| Sodium       | ppm | ASTM D5185m |            | <b>0</b> | 0        | 1        |
| Potassium    | ppm | ASTM D5185m | >20        | <b>0</b> | 0        | <1       |

| VISUAL           |        | method  | limit/base | current      | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal      | scalar | *Visual | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Precipitate      | scalar | *Visual | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Silt             | scalar | *Visual | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Debris           | scalar | *Visual | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Appearance       | scalar | *Visual | NORML      | <b>NORML</b> | NORML    | NORML    |
| Odor             | scalar | *Visual | NORML      | <b>NORML</b> | NORML    | NORML    |
| Emulsified Water | scalar | *Visual | >0.05      | <b>NEG</b>   | NEG      | NEG      |
| Free Water       | scalar | *Visual |            | <b>NEG</b>   | NEG      | NEG      |



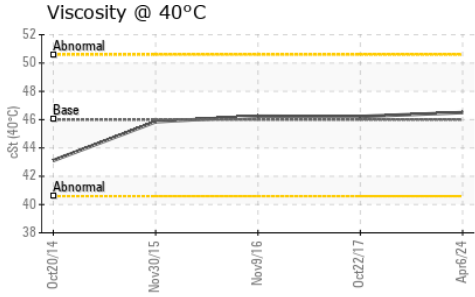
# OIL ANALYSIS REPORT



| FLUID PROPERTIES | method | limit/base | current | history1    | history2 |       |
|------------------|--------|------------|---------|-------------|----------|-------|
| Visc @ 40°C      | cSt    | ASTM D445  | 46      | <b>46.5</b> | 46.22    | 46.24 |

| SAMPLE IMAGES | method | limit/base | current   | history1  | history2 |
|---------------|--------|------------|---|---|----------|
| Color         |        |            |  |  | no image |
| Bottom        |        |            |  |  | no image |

## GRAPHS

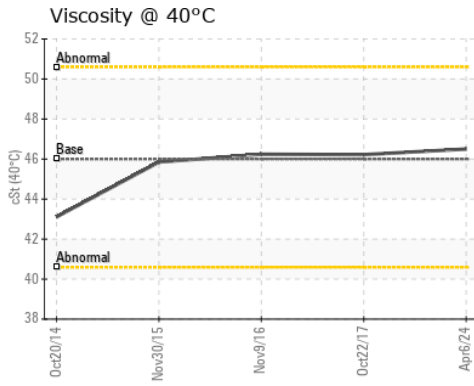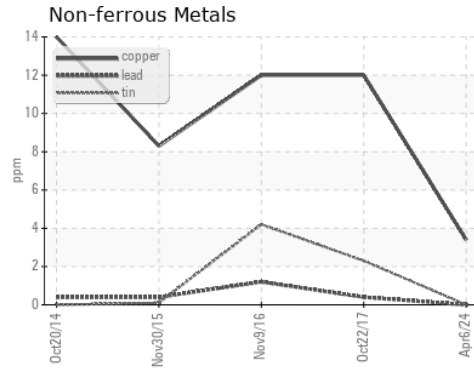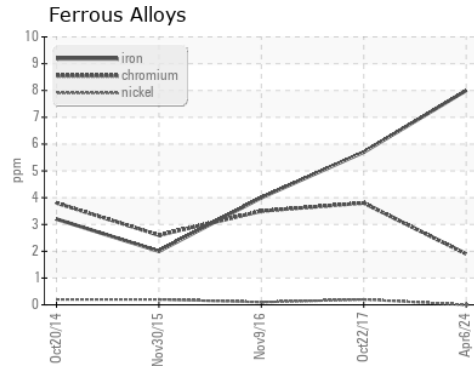

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : HRE0000027      **Received** : 05 Apr 2024  
**Lab Number** : **06140372**      **Tested** : 08 Apr 2024  
**Unique Number** : 10965180      **Diagnosed** : 08 Apr 2024 - Wes Davis  
**Test Package** : IND 1

**SUMIRIKO TENNESSEE INC**  
 150 HESTER LN  
 TAZEWELL, TN  
 US 37879  
 Contact: JEREMY COLLINS  
 jcollins@us.sumiriko.com  
 T: (423)626-8805  
 F: (423)626-2065

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)