


OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

ALSTOM 3521

Component Hydraulic System Fluid ESSO UNIVIS N 32 (55 GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0667765	WC0417715	WC0592287
Sample Date		Client Info		29 Mar 2024	06 Apr 2023	06 Apr 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Not Changd	N/A
Sample Status				ABNORMAL	ABNORMAL	NORMAL
CONTAMINATION	N	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	2	3	2
Chromium	ppm	ASTM D5185m	>10	4	4	4
Nickel	ppm	ASTM D5185m	>10	37	43	44
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	<1	0
Lead	ppm	ASTM D5185m	>10	20	16	15
Copper	ppm	ASTM D5185m	>75	20	12	13
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	.1	0	0	<1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m	.3	0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m	0	2	1	0
Calcium	ppm	ASTM D5185m	74	57	63	59
Phosphorus	ppm	ASTM D5185m	266	366	373	376
Zinc	ppm	ASTM D5185m	338	467	460	398
Sulfur	ppm	ASTM D5185m		3301	3021	2591
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	1	1	<1
Sodium	ppm	ASTM D5185m		4	3	4
Potassium	ppm	ASTM D5185m	>20	<1	0	0
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	A 32342		1755
Particles >6µm		ASTM D7647	>1300	<u> </u>		360
Particles >14µm		ASTM D7647	>160	1966		26
Particles >21µm		ASTM D7647	>40	<u>▲</u> 958		7
Particles >38µm		ASTM D7647	>10	▲ 77		0
Particles >71µm		ASTM D7647		1		0
				-		-

ISO 4406 (c) >20/17/14 A 22/21/18


Oil Cleanliness


18/16/12



OIL ANALYSIS REPORT

30k -	4μm 6μm 14μm				/
20k					1
25k	mal			+	
5k			\wedge		A A A A A A A A A A A A A A A A A A A
Apr15/11 N	Apr17/13	Apr11/15	Apr8/18	Apr8/21	Apr6/23
	∝ icle Trer				
35k					





Apr8/18 -

\pr8/21

kpr6/23

() 32 - Ba () 0+ 30 ts 28

26

24

22


Apr15/11

nr17/13


pr11/15


		and the state	It is the second		In the transmission	history O
FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.35	0.42	0.33
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	🔺 MODER	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	32	29.6	27.8	28.1
SAMPLE IMAGES		method	limit/base	current	history1	history2
				ALL DO THE		

Color



Bottom

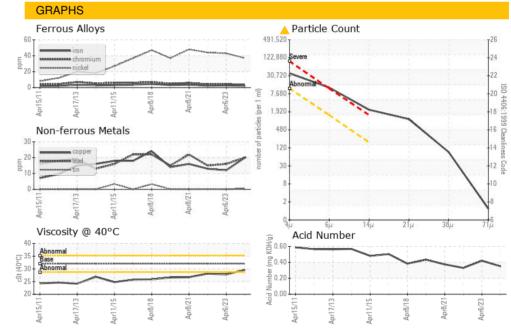



Report Id: AMTRAK [WUSCAR] 06140619 (Generated: 04/09/2024 12:06:30) Rev: 1

Contact/Location: MICHAEL PORTER - AMTRAK

Page 2 of 2