




# OIL ANALYSIS REPORT

Sample Rating Trend

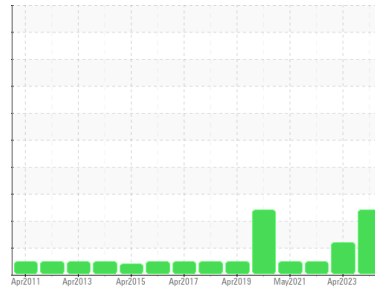

ISO



Machine Id  
**ALSTOM 3539**  
 Component  
**Hydraulic System**  
 Fluid  
**ESSO UNIVIS N 32 (55 GAL)**

## DIAGNOSIS

### Recommendation

We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of particulates (2 to 100 microns in size) present in the oil. The system cleanliness is above the acceptable limit for the target ISO 4406 cleanliness code.

### Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0909821</b>	WC0649668	WC0592286
Sample Date	Client Info		<b>29 Mar 2024</b>	01 Apr 2023	10 Apr 2022
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	1
Chromium	ppm	ASTM D5185m >10	<b>1</b>	2	2
Nickel	ppm	ASTM D5185m >10	<b>9</b>	10	16
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Lead	ppm	ASTM D5185m >10	<b>8</b>	8	8
Copper	ppm	ASTM D5185m >75	<b>6</b>	7	4
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m .1	<b>0</b>	0	<1
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m .3	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m 0	<b>&lt;1</b>	2	0
Calcium	ppm	ASTM D5185m 74	<b>46</b>	50	47
Phosphorus	ppm	ASTM D5185m 266	<b>353</b>	374	371
Zinc	ppm	ASTM D5185m 338	<b>411</b>	444	343
Sulfur	ppm	ASTM D5185m	<b>3158</b>	3342	2829

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>1</b>	1	<1
Sodium	ppm	ASTM D5185m	<b>2</b>	1	2
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	0


## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	<b>▲ 36136</b>	● 10743	2480
Particles >6µm	ASTM D7647	>1300	<b>▲ 8377</b>	▲ 2535	566
Particles >14µm	ASTM D7647	>160	<b>▲ 754</b>	105	41
Particles >21µm	ASTM D7647	>40	<b>▲ 276</b>	13	7
Particles >38µm	ASTM D7647	>10	<b>● 17</b>	1	0
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>20/17/14	<b>▲ 22/20/17</b>	▲ 21/19/14	18/16/13




# OIL ANALYSIS REPORT


▲ Particle Trend

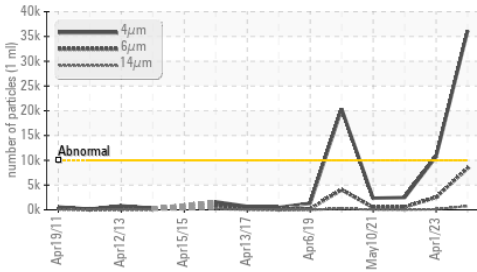


▲ Particle Trend

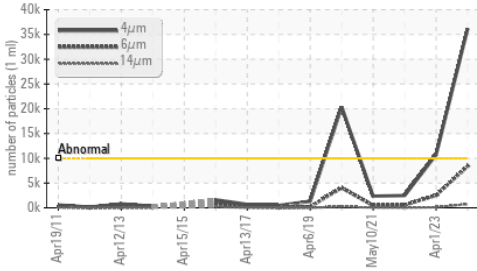

Acid Number

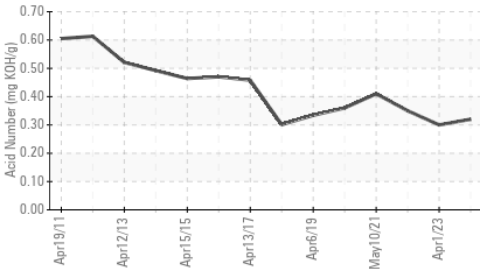

Viscosity @ 40°C

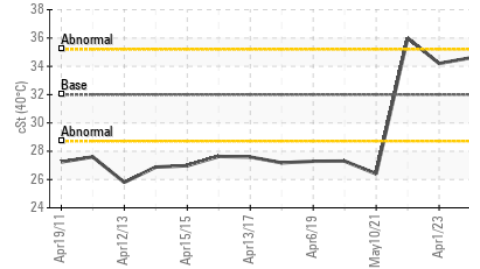

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.32</b>	0.30	0.35
VISUAL					
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

### FLUID PROPERTIES

	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	<b>32</b>	34.2	36.0

### SAMPLE IMAGES

Color

Bottom

### GRAPHS

**Ferrous Alloys**

**Non-ferrous Metals**

**Viscosity @ 40°C**

**Particle Count**

**Acid Number**



**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0909821  
**Lab Number** : 06140620  
**Unique Number** : 10965428  
**Test Package** : MOB 2

**Received** : 05 Apr 2024  
**Tested** : 08 Apr 2024  
**Diagnosed** : 08 Apr 2024 - Wes Davis

**AMTRAK**  
 1401 W STREET NE, HIGH SPEED RAIL 2ND FLOOR  
 WASHINGTON, DC  
 US 20018  
 Contact: MICHAEL PORTER  
 michael.porter@amtrak.com  
 T: (202)870-1399  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)