




# OIL ANALYSIS REPORT

Sample Rating Trend

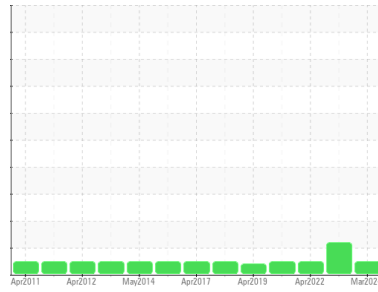

**NORMAL**



Machine Id  
**ALSTOM 3532**  
 Component  
**Hydraulic System**  
 Fluid  
**ESSO UNIVIS N 32 (55 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0798849</b>	WC0781688	WC0643784
Sample Date	Client Info			<b>30 Mar 2024</b>	29 Mar 2024	10 Apr 2022
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	ABNORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	2
Chromium	ppm	ASTM D5185m	>10	<b>1</b>	2	3
Nickel	ppm	ASTM D5185m	>10	<b>13</b>	▲ 19	26
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Lead	ppm	ASTM D5185m	>10	<b>6</b>	10	11
Copper	ppm	ASTM D5185m	>75	<b>3</b>	5	6
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185m		<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	.1	<b>0</b>	0	<1
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	.3	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185m	0	<b>&lt;1</b>	2	0
Calcium	ppm	ASTM D5185m	74	<b>50</b>	52	56
Phosphorus	ppm	ASTM D5185m	266	<b>343</b>	354	371
Zinc	ppm	ASTM D5185m	338	<b>434</b>	438	390
Sulfur	ppm	ASTM D5185m		<b>2797</b>	3294	2837


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>1</b>	1	<1
Sodium	ppm	ASTM D5185m		<b>2</b>	2	3
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	<1	0

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	<b>6711</b>	2453	2877
Particles >6µm		ASTM D7647	>1300	<b>1042</b>	530	773
Particles >14µm		ASTM D7647	>160	<b>56</b>	40	86
Particles >21µm		ASTM D7647	>40	<b>15</b>	14	20
Particles >38µm		ASTM D7647	>10	<b>0</b>	1	2
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>20/17/14	<b>20/17/13</b>	18/16/12	19/17/14




# OIL ANALYSIS REPORT


Particle Trend

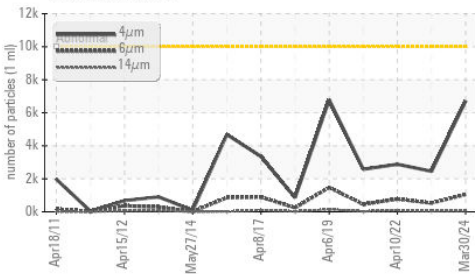


Acid Number

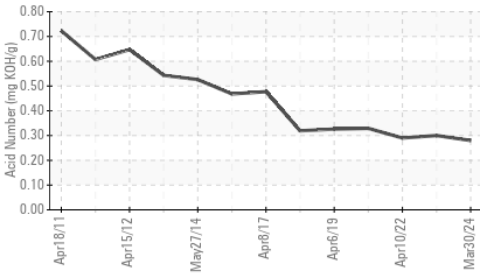

Viscosity @ 40°C

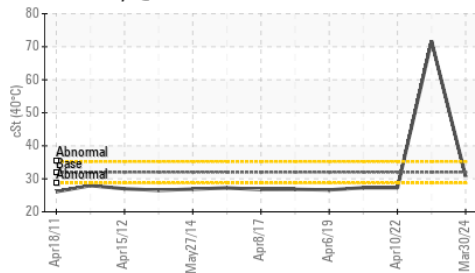

Particle Trend

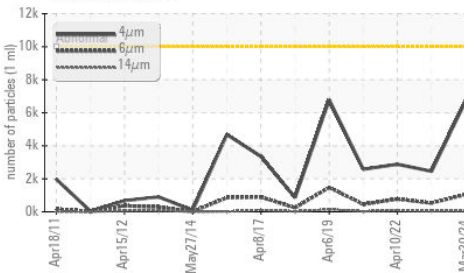

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D8045	<b>0.28</b>	0.30	0.29


### VISUAL

method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	NONE	NONE
Yellow Metal	scalar *Visual	NONE	NONE	NONE
Precipitate	scalar *Visual	NONE	NONE	NONE
Silt	scalar *Visual	NONE	NONE	NONE
Debris	scalar *Visual	NONE	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	NONE	NONE
Appearance	scalar *Visual	NORML	NORML	NORML
Odor	scalar *Visual	NORML	NORML	NORML
Emulsified Water	scalar *Visual	>0.1	NEG	NEG
Free Water	scalar *Visual	NEG	NEG	NEG

### FLUID PROPERTIES


method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445 32	<b>30.7</b>	▲ 71.7	27.3

### SAMPLE IMAGES

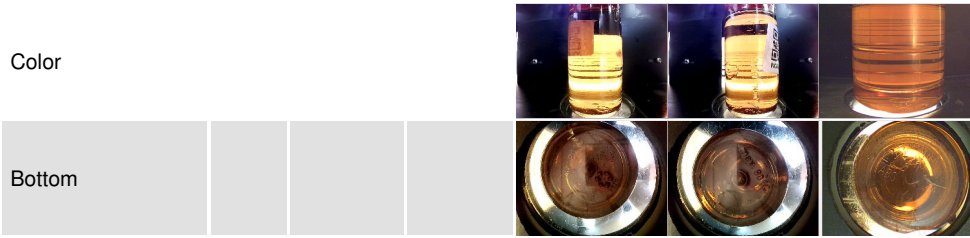


### GRAPHS


Ferrous Alloys

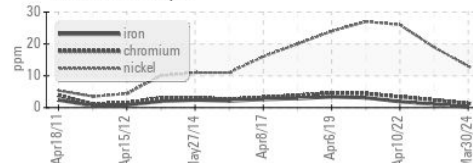


Non-ferrous Metals

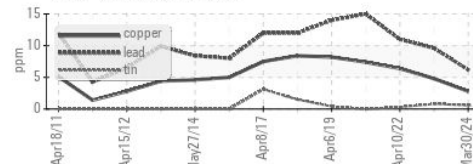


Viscosity @ 40°C

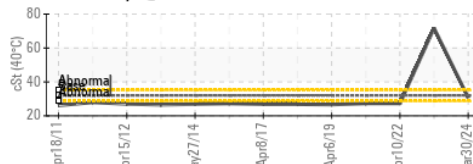

Particle Count

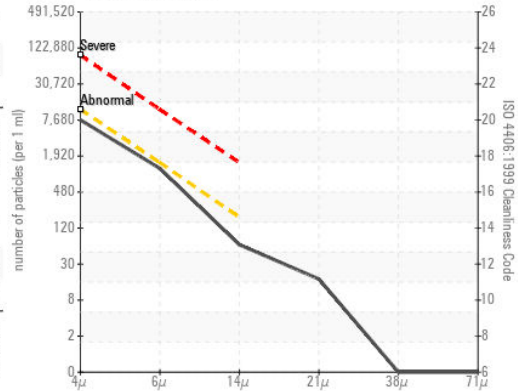

Acid Number

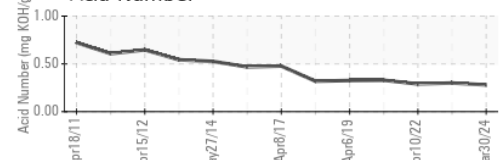

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0798849

Lab Number : 06140627

Unique Number : 10965435

Test Package : MOB 2

Received : 05 Apr 2024

Tested : 08 Apr 2024

Diagnosed : 10 Apr 2024 - Jonathan Hester

AMTRAK

1401 W STREET NE, HIGH SPEED RAIL 2ND FLOOR

WASHINGTON, DC

US 20018

Contact: MICHAEL PORTER

michael.porter@amtrak.com

T: (202)870-1399

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)