




OIL ANALYSIS REPORT

Sample Rating Trend

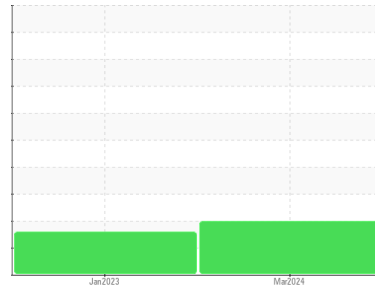

WEAR



Area
(222870) {UNASSIGNED}

Machine Id
98011

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (10 GAL)

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

Piston, ring and cylinder wear is indicated.

● Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

● Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|----------|
| Sample Number | Client Info | | SBP0006578 | SBP0002563 | --- |
| Sample Date | Client Info | | 29 Mar 2024 | 25 Jan 2023 | --- |
| Machine Age | mls | Client Info | 22412 | 0 | --- |
| Oil Age | mls | Client Info | 22412 | 9042 | --- |
| Oil Changed | Client Info | | Changed | Changed | --- |
| Sample Status | | | ABNORMAL | ABNORMAL | --- |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.2 | NEG | NEG | --- |
| Glycol | WC Method | | NEG | NEG | --- |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >90 | ▲ 113 | ▲ 110 | --- |
| Chromium | ppm | ASTM D5185m >20 | 6 | 3 | --- |
| Nickel | ppm | ASTM D5185m >2 | 3 | 2 | --- |
| Titanium | ppm | ASTM D5185m >2 | <1 | <1 | --- |
| Silver | ppm | ASTM D5185m >2 | 0 | 0 | --- |
| Aluminum | ppm | ASTM D5185m >20 | ▲ 26 | ▲ 23 | --- |
| Lead | ppm | ASTM D5185m >40 | <1 | 0 | --- |
| Copper | ppm | ASTM D5185m >330 | 17 | 55 | --- |
| Tin | ppm | ASTM D5185m >15 | 3 | 4 | --- |
| Vanadium | ppm | ASTM D5185m | <1 | 0 | --- |
| Cadmium | ppm | ASTM D5185m | <1 | 0 | --- |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|------------------|-------------|----------|----------|
| Boron | ppm | ASTM D5185m 0 | 7 | 53 | --- |
| Barium | ppm | ASTM D5185m 0 | 0 | 2 | --- |
| Molybdenum | ppm | ASTM D5185m 60 | 92 | 4 | --- |
| Manganese | ppm | ASTM D5185m 0 | 3 | 6 | --- |
| Magnesium | ppm | ASTM D5185m 1010 | 1490 | 734 | --- |
| Calcium | ppm | ASTM D5185m 1070 | 1670 | 1365 | --- |
| Phosphorus | ppm | ASTM D5185m 1150 | 1374 | 735 | --- |
| Zinc | ppm | ASTM D5185m 1270 | 1822 | 876 | --- |
| Sulfur | ppm | ASTM D5185m 2060 | 4476 | 3014 | --- |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-----------------|------------|----------|----------|
| Silicon | ppm | ASTM D5185m >25 | 12 | 12 | --- |
| Sodium | ppm | ASTM D5185m | 7 | 5 | --- |
| Potassium | ppm | ASTM D5185m >20 | 21 | 23 | --- |
| Fuel | % | ASTM D3524 >3.0 | 0.2 | <1.0 | --- |

INFRA-RED

| | method | limit/base | current | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 >6 | 0.8 | 0.6 | --- |
| Nitration | Abs/cm | *ASTM D7624 >20 | 12.6 | 11.8 | --- |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | 25.6 | 23.5 | --- |


FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 >25 | 24.4 | 19.6 | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896 9.8 | 6.3 | 6.7 | --- |




OIL ANALYSIS REPORT


▲ Aluminum (ppm)

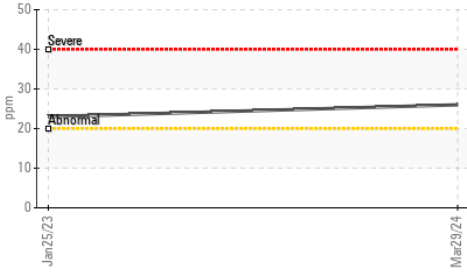


● Fuel Dilution

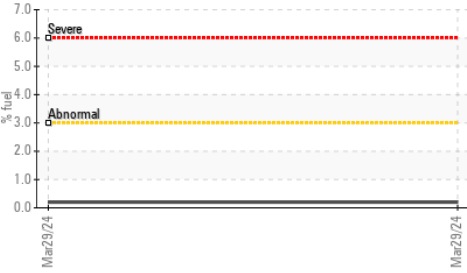


▲ FT-IR (Direct Trend)

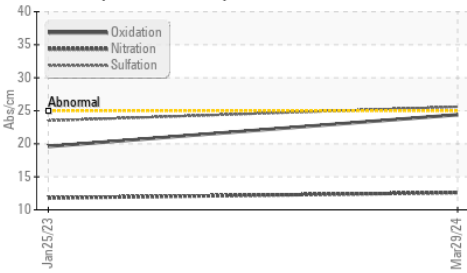

● Fuel Dilution

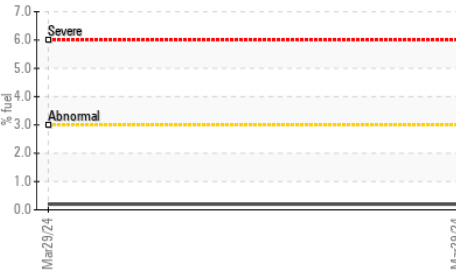

▲ FT-IR (Direct Trend)

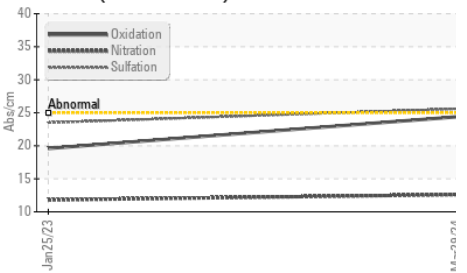


| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- |
| Silt | scalar | *Visual | NONE | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | --- |
| Free Water | scalar | *Visual | | NEG | --- |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|----------|----------|-----|
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | ● 11.4 | 13.0 | --- |

GRAPHS


▲ Ferrous Alloys

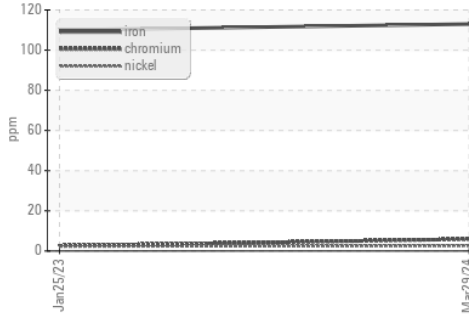


Non-ferrous Metals

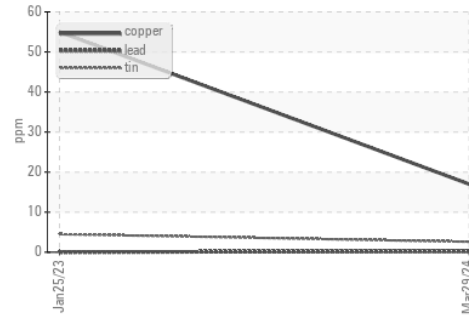

● Viscosity @ 100°C

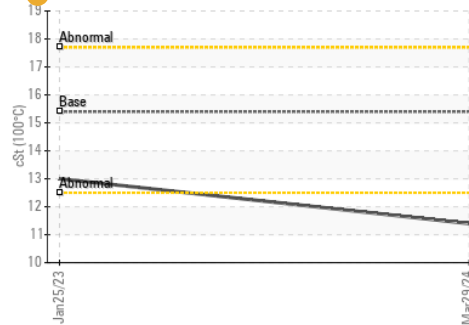

Base Number

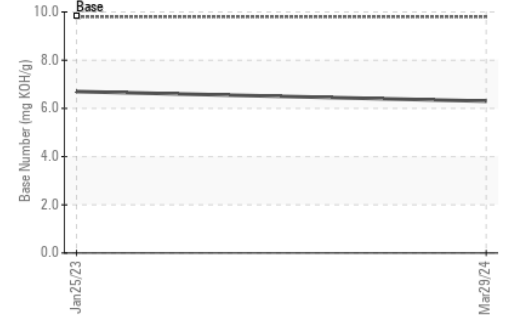

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : SBP0006578

Lab Number : 06140921

Unique Number : 10965729

Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 08 Apr 2024

Tested : 10 Apr 2024

Diagnosed : 10 Apr 2024 - Don Baldrige

Sapp Bros. Fleet - Omaha Petroleum Location

9915 South 148th

OMAHA, NE

US 68138

Contact: Stephanie Kelly

skelly@sappbros.net

T: (800)211-8589

F: