




OIL ANALYSIS REPORT



Area
OKLAHOMA/1151/EG - LOADER
 Machine Id
46.87L [OKLAHOMA^1151^EG - LOADER]
 Component
Hydraulic System
 Fluid
MOBIL MOBILTRANS AST 30 (--- GAL)

Sample Rating Trend

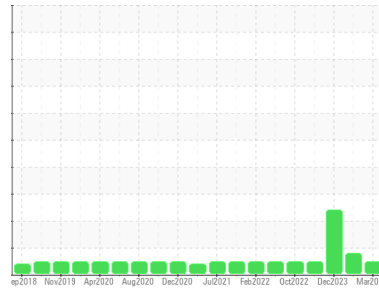

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0908781	WC0857431	WC0848852
Sample Date	Client Info		28 Mar 2024	08 Feb 2024	18 Dec 2023
Machine Age	hrs	Client Info	10309	9979	9769
Oil Age	hrs	Client Info	0	1000	500
Oil Changed	Client Info		N/A	Changed	Not Changd
Sample Status			NORMAL	ATTENTION	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	7	5	▲ 34
Chromium	ppm	ASTM D5185m >10	<1	0	<1
Nickel	ppm	ASTM D5185m >10	<1	0	<1
Titanium	ppm	ASTM D5185m	<1	<1	<1
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >10	2	1	2
Lead	ppm	ASTM D5185m >10	<1	<1	6
Copper	ppm	ASTM D5185m >75	3	2	▲ 63
Tin	ppm	ASTM D5185m >10	<1	0	4
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	<1	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	33	34	36
Barium	ppm	ASTM D5185m	0	0	8
Molybdenum	ppm	ASTM D5185m	2	<1	2
Manganese	ppm	ASTM D5185m	<1	0	<1
Magnesium	ppm	ASTM D5185m	16	13	16
Calcium	ppm	ASTM D5185m	2800	2941	3275
Phosphorus	ppm	ASTM D5185m	850	1035	1003
Zinc	ppm	ASTM D5185m	1183	1214	1313
Sulfur	ppm	ASTM D5185m	4332	5048	5354

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	7	6	5
Sodium	ppm	ASTM D5185m	2	3	3
Potassium	ppm	ASTM D5185m >20	2	<1	2

FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		1435	13494	22769
Particles >6µm	ASTM D7647 >2500		229	● 2669	● 4720
Particles >14µm	ASTM D7647 >640		20	225	263
Particles >21µm	ASTM D7647 >160		5	55	56
Particles >38µm	ASTM D7647 >40		0	2	2
Particles >71µm	ASTM D7647 >10		0	0	0
Oil Cleanliness	ISO 4406 (c) >--/18/16		18/15/11	● 21/19/15	● 22/19/15

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.22	1.80	1.32




OIL ANALYSIS REPORT

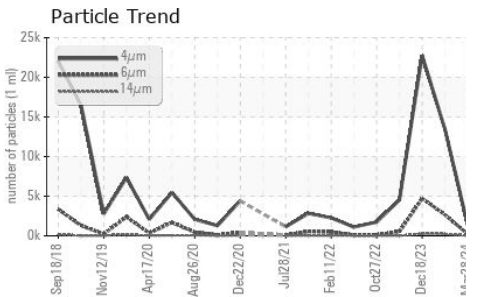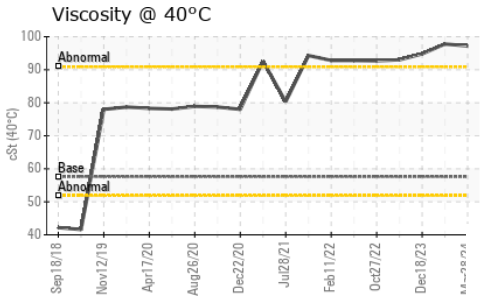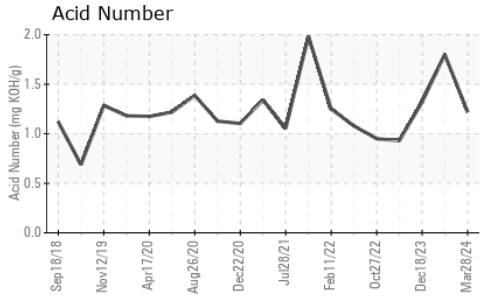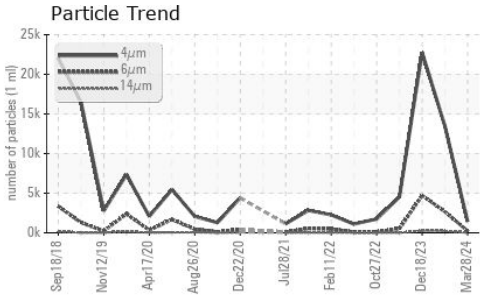






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	57.6	97.2	97.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

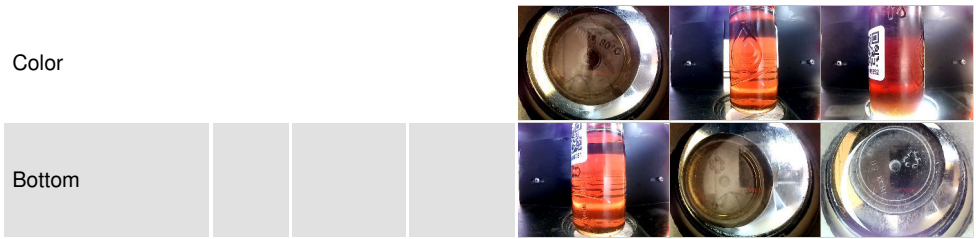

GRAPHS

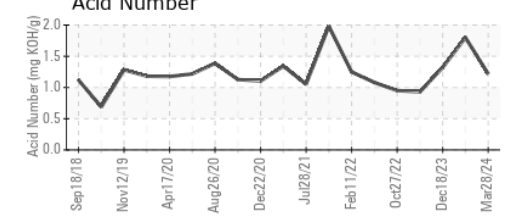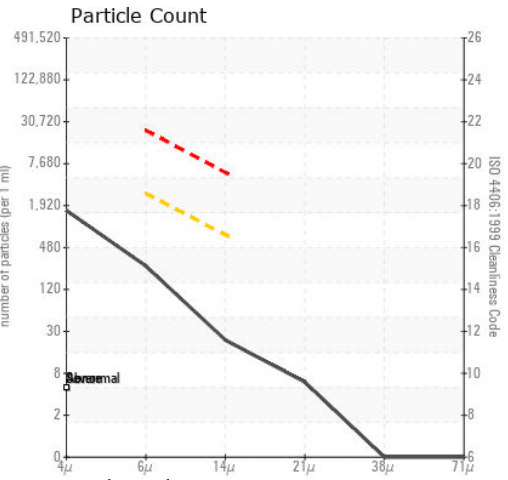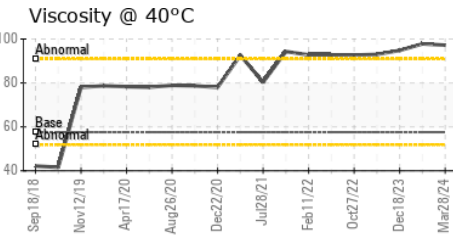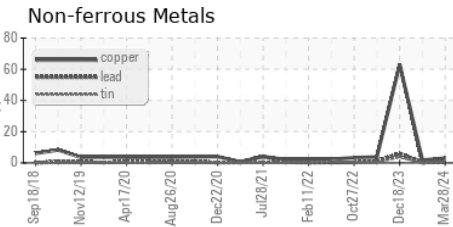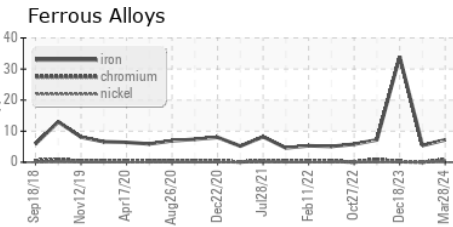

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0908781 **Received** : 08 Apr 2024
Lab Number : 06141204 **Tested** : 09 Apr 2024
Unique Number : 10966012 **Diagnosed** : 09 Apr 2024 - Wes Davis
Test Package : CONST

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: BILL ORCUTT
 william.orcutt@wildcat.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)