


OIL ANALYSIS REPORT

Sample Rating Trend

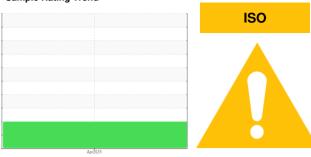

Machine Id

REFINER 1

Component Hydraulic System

AW HYDRAULIC OIL ISO 150 (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Apr2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0873123		
Sample Date		Client Info		04 Apr 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
CONTAMINATION	٧	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	22		
Chromium	ppm	ASTM D5185m	>20	<1		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	3		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m	>20	2		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0		
Barium	ppm	ASTM D5185m	5	0		
Molybdenum	ppm	ASTM D5185m	5	<1		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	25	4		
Calcium	ppm	ASTM D5185m	200	15		
Phosphorus	ppm	ASTM D5185m	300	96		
Zinc	ppm	ASTM D5185m	370	27		
Sulfur	ppm	ASTM D5185m	2500	3922		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	5		
Sodium	ppm	ASTM D5185m		3		
Potassium	ppm	ASTM D5185m	>20	3		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	141860		
Particles >6µm		ASTM D7647	>1300	4 64958		
Particles >14µm		ASTM D7647	>160	1739		
Particles >21µm		ASTM D7647	>40	<u>^</u> 321		
Particles >38μm		ASTM D7647	>10	10		
Particles >71μm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<u>4</u> 24/23/18		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2


Acid Number (AN)

mg KOH/g ASTM D8045 0.57

Contact/Location: Jerald Caldwell - BLUDAN



OIL ANALYSIS REPORT

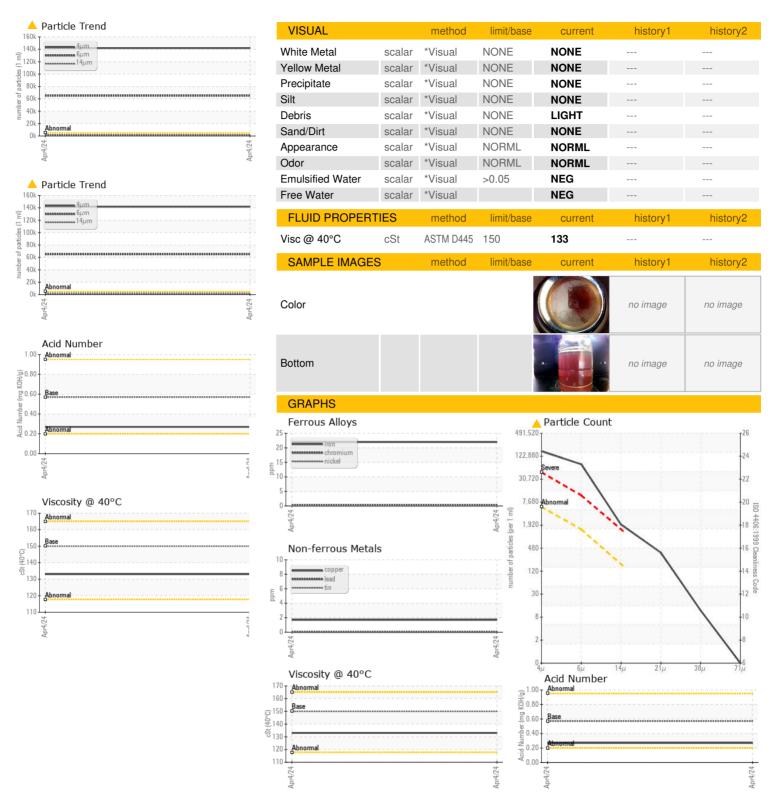



Certificate 12367

Laboratory Sample No.

: WC0873123 Lab Number : 06141259 Unique Number : 10966067

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 08 Apr 2024 **Tested** : 09 Apr 2024 : 10 Apr 2024 - Don Baldridge

Diagnosed Test Package : IND 2

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

BLUE RIDGE FIBERBOARD

250 KNIGHT CELOTEX DR DANVILLE, VA

US 24541

Contact: Jerald Caldwell JCaldwell@blueridgefiberboard.com

T: F:

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) Report Id: BLUDAN [WUSCAR] 06141259 (Generated: 04/10/2024 18:00:39) Rev: 1

Contact/Location: Jerald Caldwell - BLUDAN