




OIL ANALYSIS REPORT

Sample Rating Trend

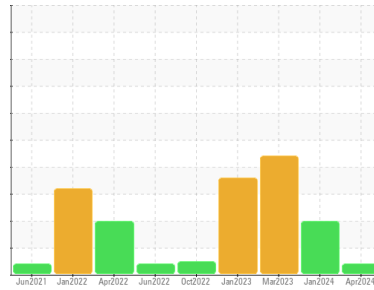

VIS DEBRIS



Machine Id
DRY END OUTER FAN
 Component
Hydraulic System
 Fluid
PACEMAKER (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Wear

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0904911	WC0873107	WC0800295
Sample Date	Client Info		04 Apr 2024	24 Jan 2024	10 Mar 2023
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.05	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	1	1	11
Chromium	ppm	ASTM D5185m >20	<1	<1	0
Nickel	ppm	ASTM D5185m >20	<1	0	0
Titanium	ppm	ASTM D5185m	<1	0	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >20	5	3	<1
Lead	ppm	ASTM D5185m >20	0	0	<1
Copper	ppm	ASTM D5185m >20	<1	<1	<1
Tin	ppm	ASTM D5185m >20	<1	0	<1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	<1
Manganese	ppm	ASTM D5185m	0	0	<1
Magnesium	ppm	ASTM D5185m	1	0	<1
Calcium	ppm	ASTM D5185m	10	0	8
Phosphorus	ppm	ASTM D5185m	35	0	49
Zinc	ppm	ASTM D5185m	19	0	6
Sulfur	ppm	ASTM D5185m	175	290	331

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	2	0	4
Sodium	ppm	ASTM D5185m	6	0	0
Potassium	ppm	ASTM D5185m >20	3	<1	1

FLUID CLEANLINESS



	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	---	▲ 24832	▲ 19993
Particles >6µm	ASTM D7647	>1300	---	▲ 3183	▲ 3131
Particles >14µm	ASTM D7647	>160	---	▲ 221	27
Particles >21µm	ASTM D7647	>40	---	▲ 80	4
Particles >38µm	ASTM D7647	>10	---	3	1
Particles >71µm	ASTM D7647	>3	---	1	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	---	▲ 22/19/15	▲ 21/19/12

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.088	0.13	0.115




OIL ANALYSIS REPORT

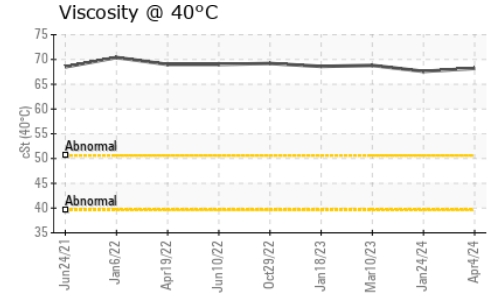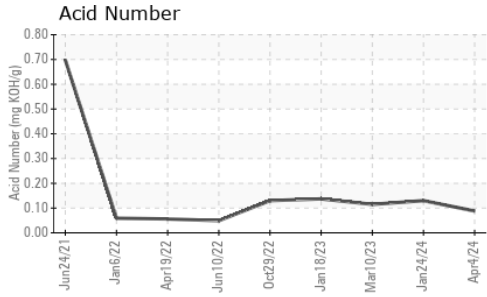





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	▲ MODER	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	0.2%
Free Water	scalar	*Visual		NEG	▲ 1.0

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	68.2	67.6	68.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

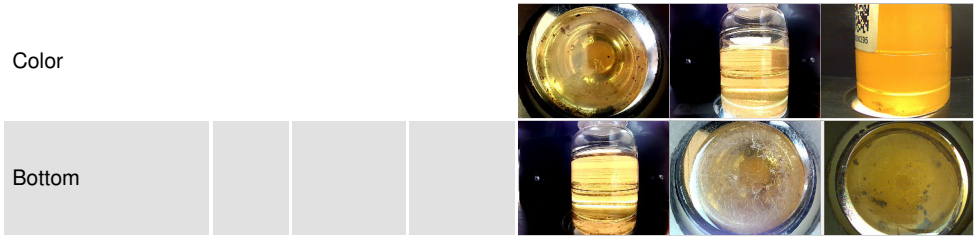

GRAPHS

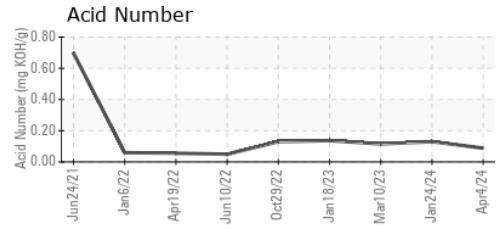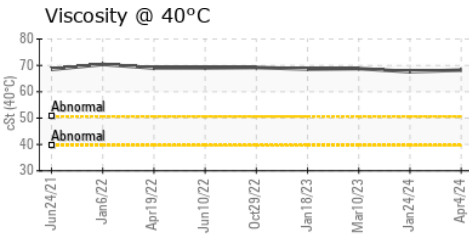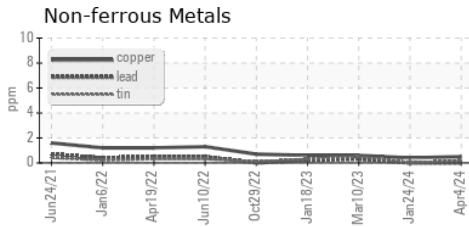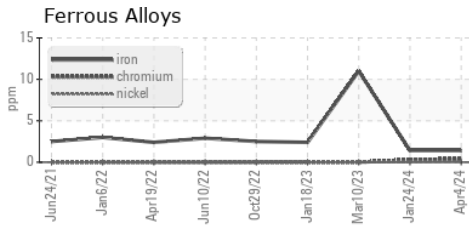

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0904911 **Received** : 08 Apr 2024
Lab Number : 06141262 **Tested** : 10 Apr 2024
Unique Number : 10966070 **Diagnosed** : 10 Apr 2024 - Don Baldrige
Test Package : IND 2

BLUE RIDGE FIBERBOARD
 250 KNIGHT CELOTEX DR
 DANVILLE, VA
 US 24541
 Contact: Jerald Caldwell
 JCaldwell@blueridgefiberboard.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)