




# OIL ANALYSIS REPORT

Sample Rating Trend

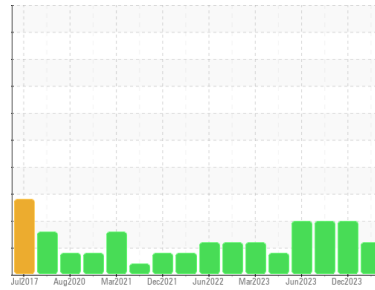

ISO



Machine Id  
**TRUCK DUMP**

Component  
**Hydraulic System**

Fluid  
**AW HYDRAULIC OIL ISO 68 (400 GAL)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0873113</b>	WC0819738	WC0845559
Sample Date	Client Info		<b>06 Mar 2024</b>	13 Dec 2023	16 Oct 2023
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	SEVERE	SEVERE

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.05	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>3</b>	<1	1
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	3	3
Nickel	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>5</b>	3	0
Lead	ppm	ASTM D5185m >20	<b>0</b>	1	2
Copper	ppm	ASTM D5185m >20	<b>5</b>	14	12
Tin	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 5	<b>0</b>	0	<1
Barium	ppm	ASTM D5185m 5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 5	<b>&lt;1</b>	<1	<1
Manganese	ppm	ASTM D5185m	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m 25	<b>2</b>	3	2
Calcium	ppm	ASTM D5185m 200	<b>43</b>	81	79
Phosphorus	ppm	ASTM D5185m 300	<b>59</b>	340	389
Zinc	ppm	ASTM D5185m 370	<b>214</b>	473	500
Sulfur	ppm	ASTM D5185m 2500	<b>1036</b>	1406	1435

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<b>2</b>	2	2
Sodium	ppm	ASTM D5185m	<b>2</b>	0	<1
Potassium	ppm	ASTM D5185m >20	<b>2</b>	1	<1

## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>▲ 75876</b>	▲ 57337	▲ 69105
Particles >6µm	ASTM D7647	>1300	<b>▲ 6778</b>	▲ 4107	▲ 6900
Particles >14µm	ASTM D7647	>160	<b>68</b>	46	74
Particles >21µm	ASTM D7647	>40	<b>12</b>	14	16
Particles >38µm	ASTM D7647	>10	<b>1</b>	1	1
Particles >71µm	ASTM D7647	>3	<b>0</b>	1	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>▲ 23/20/13</b>	▲ 23/19/13	▲ 23/20/13


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.57	<b>0.25</b>	0.23	0.22




# OIL ANALYSIS REPORT


## Particle Trend

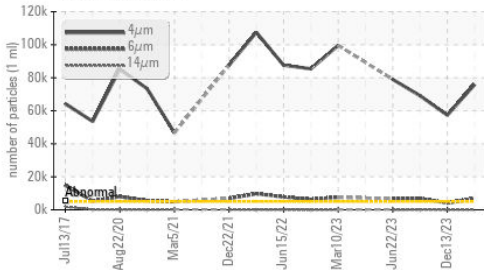


## Particle Trend

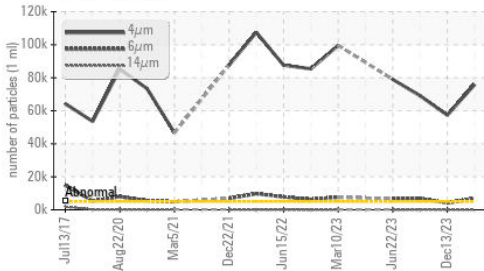

## Acid Number

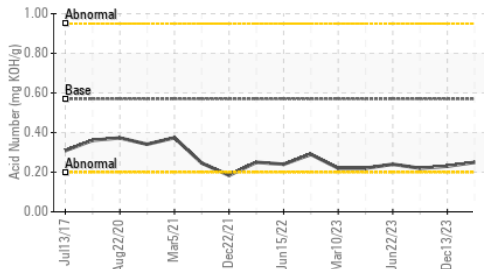


## Viscosity @ 40°C

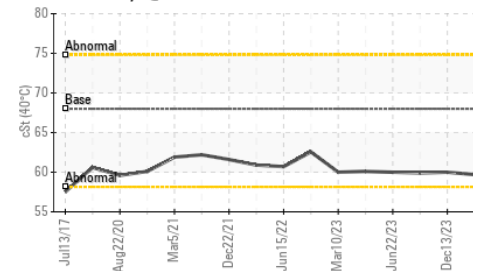

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	68	59.7	60.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

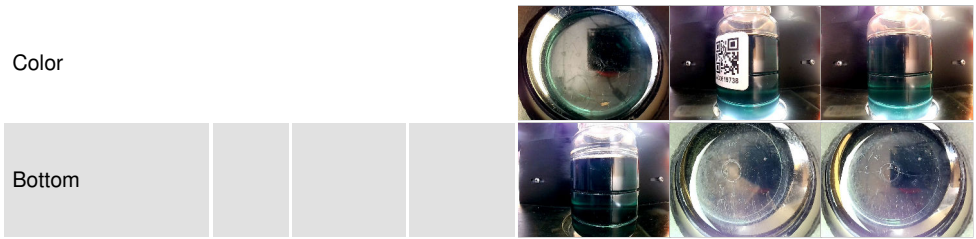


## GRAPHS


### Ferrous Alloys

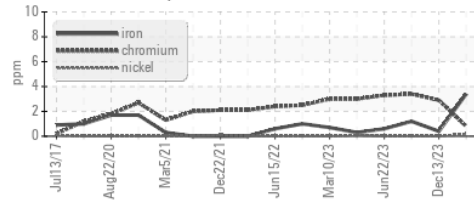


### Non-ferrous Metals

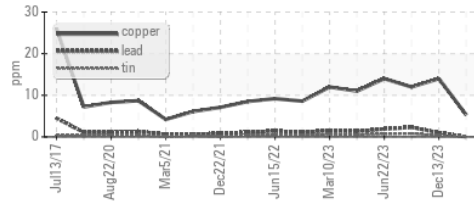


### Viscosity @ 40°C

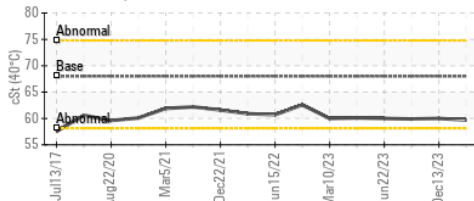

### Particle Count

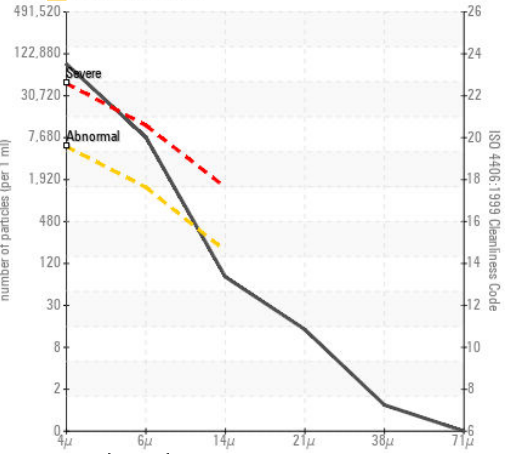

### Acid Number

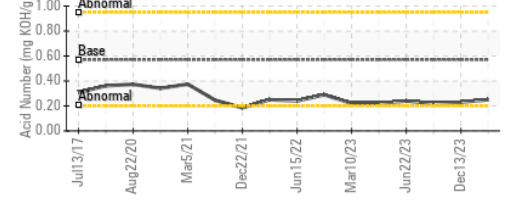

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0873113 **Received** : 08 Apr 2024  
**Lab Number** : 06141269 **Tested** : 09 Apr 2024  
**Unique Number** : 10966077 **Diagnosed** : 10 Apr 2024 - Don Baldrige  
**Test Package** : IND 2

**BLUE RIDGE FIBERBOARD**  
 250 KNIGHT CELOTEX DR  
 DANVILLE, VA  
 US 24541  
 Contact: Jerald Caldwell  
 JCaldwell@blueridgefiberboard.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)