




OIL ANALYSIS REPORT

Sample Rating Trend

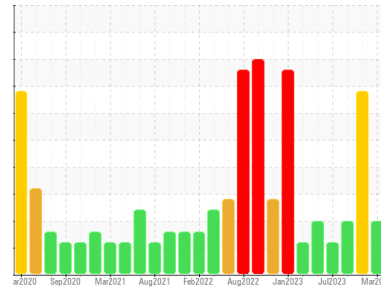

ISO



Machine Id

BAUER 1

Component

Hydraulic System

Fluid

AW HYDRAULIC OIL ISO 150 (20 GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0873111	WC0845576	WC0845574
Sample Date	Client Info		06 Mar 2024	24 Jan 2024	16 Oct 2023
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	SEVERE	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.05	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	3	▲ 529	42
Chromium	ppm	ASTM D5185m >20	<1	4	<1
Nickel	ppm	ASTM D5185m >20	0	<1	0
Titanium	ppm	ASTM D5185m	<1	0	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >20	4	3	0
Lead	ppm	ASTM D5185m >20	0	<1	<1
Copper	ppm	ASTM D5185m >20	<1	7	8
Tin	ppm	ASTM D5185m >20	<1	0	<1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 5	0	0	2
Barium	ppm	ASTM D5185m 5	0	0	0
Molybdenum	ppm	ASTM D5185m 5	0	5	6
Manganese	ppm	ASTM D5185m	0	8	<1
Magnesium	ppm	ASTM D5185m 25	<1	11	10
Calcium	ppm	ASTM D5185m 200	9	45	60
Phosphorus	ppm	ASTM D5185m 300	22	89	152
Zinc	ppm	ASTM D5185m 370	7	55	79
Sulfur	ppm	ASTM D5185m 2500	1444	3601	4320

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	2	5	4
Sodium	ppm	ASTM D5185m	2	0	<1
Potassium	ppm	ASTM D5185m >20	2	<1	1

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 139422	---	▲ 154578
Particles >6µm	ASTM D7647	>1300	▲ 51058	---	▲ 41277
Particles >14µm	ASTM D7647	>160	▲ 1524	---	▲ 369
Particles >21µm	ASTM D7647	>40	▲ 222	---	▲ 100
Particles >38µm	ASTM D7647	>10	2	---	6
Particles >71µm	ASTM D7647	>3	0	---	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 24/23/18	---	▲ 24/23/16


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.57	0.28	0.15	0.20




OIL ANALYSIS REPORT


▲ Particle Trend

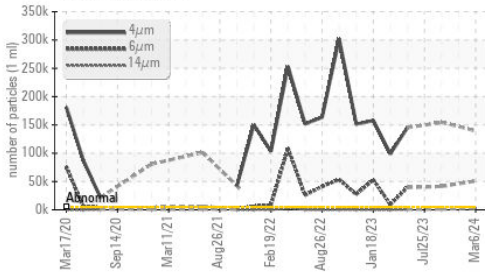


▲ Particle Trend

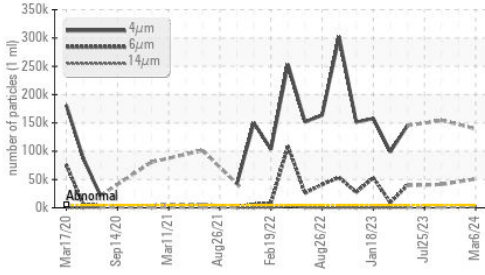

Acid Number

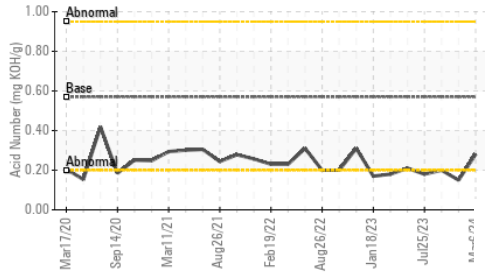

Viscosity @ 40°C

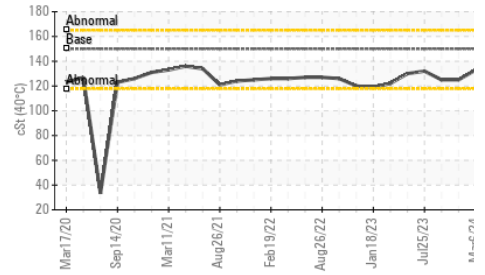

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	▲ MODER	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	150	133	125

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------


Color




Bottom

GRAPHS


Ferrous Alloys

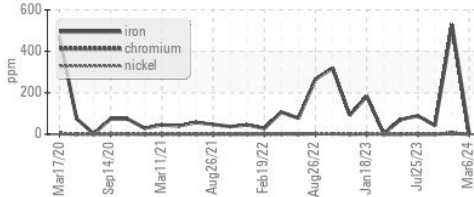


Non-ferrous Metals

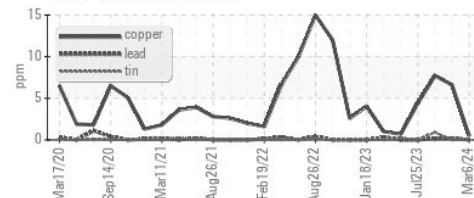


Viscosity @ 40°C

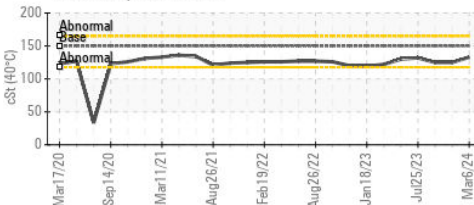

▲ Particle Count

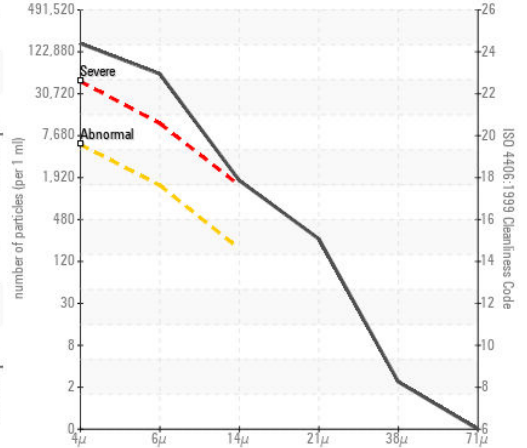

Acid Number

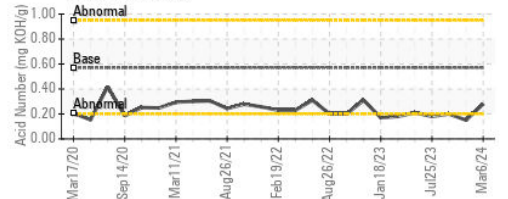

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0873111

Lab Number : 06141271

Unique Number : 10966079

Test Package : IND 2

Received : 08 Apr 2024

Tested : 09 Apr 2024

Diagnosed : 10 Apr 2024 - Don Baldrige

BLUE RIDGE FIBERBOARD

250 KNIGHT CELOTEX DR

DANVILLE, VA

US 24541

Contact: Jerald Caldwell

JCaldwell@blueridgefiberboard.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: