




# OIL ANALYSIS REPORT

Sample Rating Trend

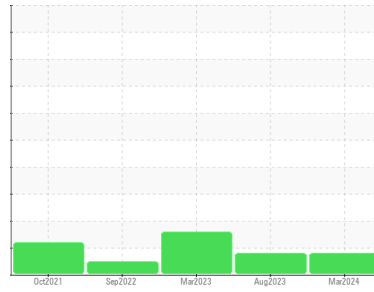

**WEAR**



Machine Id  
**HUSKY PR 72 (S/N 8453194)**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL DTE 10 EXCEL 46 (290 GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

The iron level is abnormal. All other component wear rates are normal.

### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0888272</b>	WC0755280	WC0755293
Sample Date	Client Info		<b>17 Mar 2024</b>	09 Aug 2023	08 Mar 2023
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ATTENTION

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.05	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>▲ 32</b>	▲ 28	19
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>0</b>	<1	<1
Lead	ppm	ASTM D5185m >20	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m >20	<b>0</b>	<1	0
Tin	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	<1	0
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>2</b>	6	5
Calcium	ppm	ASTM D5185m	<b>111</b>	113	117
Phosphorus	ppm	ASTM D5185m	<b>343</b>	357	338
Zinc	ppm	ASTM D5185m	<b>40</b>	51	35
Sulfur	ppm	ASTM D5185m	<b>1652</b>	1538	1122

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<b>2</b>	3	3
Sodium	ppm	ASTM D5185m	<b>1</b>	2	<1
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	0

## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>1300	<b>170</b>	161	587
Particles >6µm	ASTM D7647	>160	<b>56</b>	48	● 207
Particles >14µm	ASTM D7647	>20	<b>8</b>	7	● 30
Particles >21µm	ASTM D7647	>4	<b>2</b>	2	● 9
Particles >38µm	ASTM D7647	>3	<b>0</b>	0	0
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>17/14/11	<b>15/13/10</b>	15/13/10	● 16/15/12

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.21</b>	0.24	0.21









# OIL ANALYSIS REPORT






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45.6	41.8	41.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

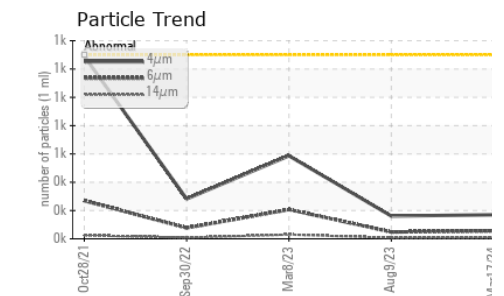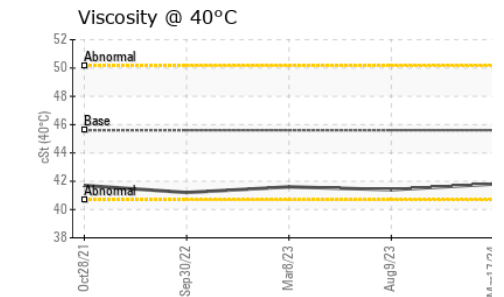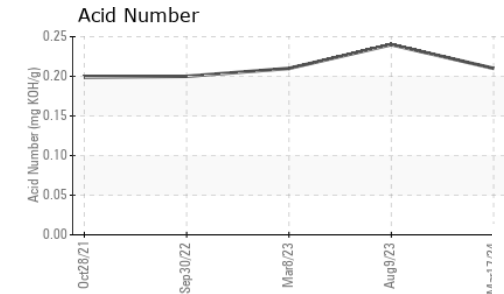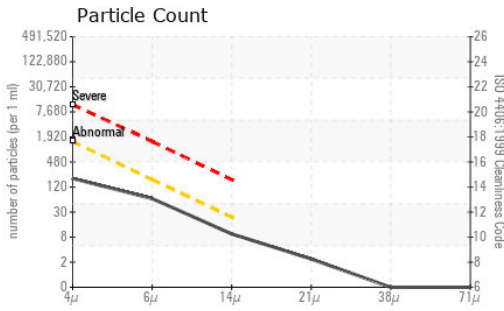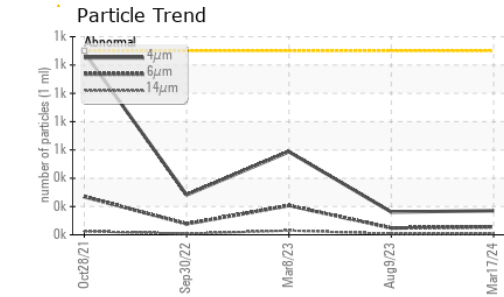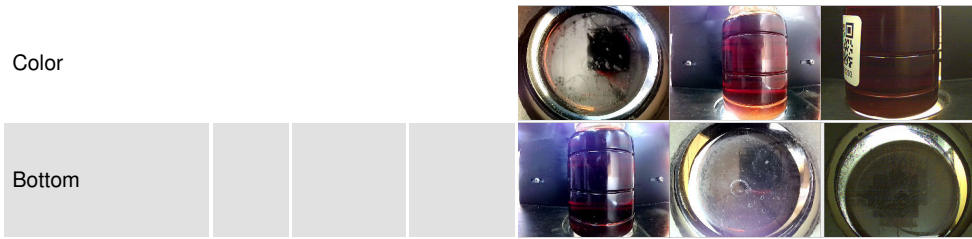

## GRAPHS

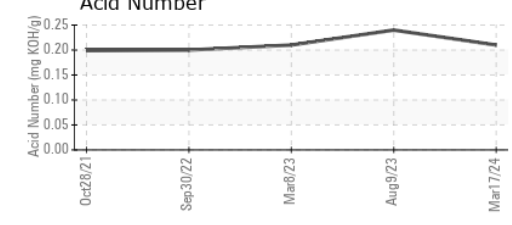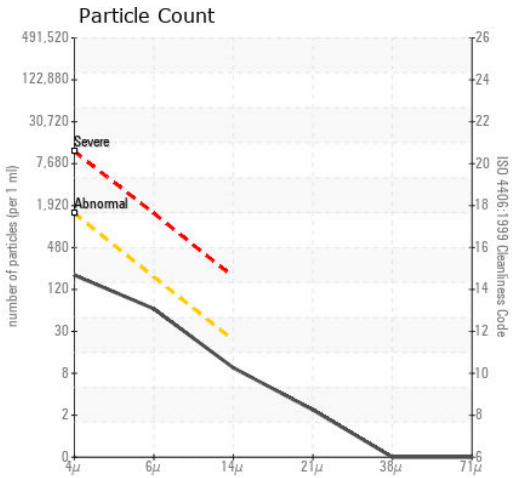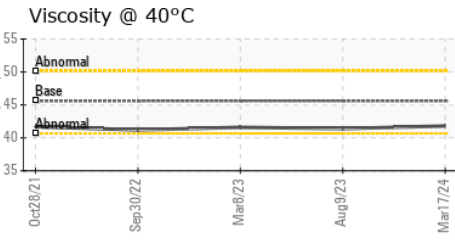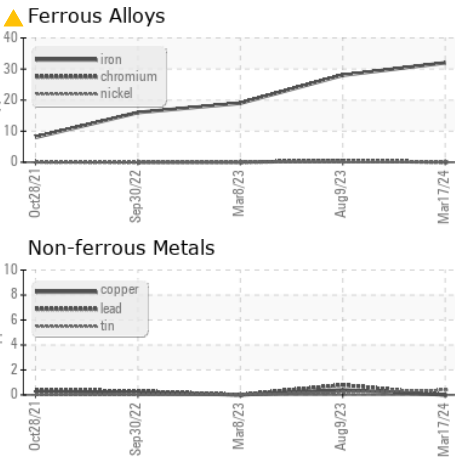

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0888272      **Received** : 08 Apr 2024  
**Lab Number** : 06141274      **Tested** : 15 Apr 2024  
**Unique Number** : 10966082      **Diagnosed** : 15 Apr 2024 - Jonathan Hester  
**Test Package** : IND 2

**SILGAN SPECIALTY**  
 5650 W. COUNTYLINE ROAD  
 MEQUON, WI  
 US 53092  
 Contact: FRANK LUCZAJ  
 FLuczaj@gatewayplastics.com  
 T: (262)242-2020  
 F: (262)238-6162

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)