




OIL ANALYSIS REPORT

Sample Rating Trend

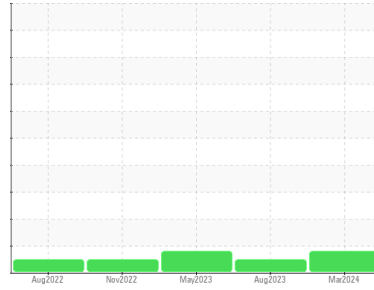

WEAR



Machine Id

JOHN DEERE 944K 703671

Component

Rear Left Final Drive

Fluid

JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

The copper level is abnormal. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	MT0006216	MT0005774	MT0005587
Sample Date	Client Info	28 Mar 2024	02 Aug 2023	05 May 2023
Machine Age	hrs	3918	526	2034
Oil Age	hrs	0	0	0
Oil Changed	Client Info	N/A	N/A	Changed
Sample Status		ABNORMAL	NORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.075	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
PQ	ASTM D8184	>1250	15	12	12	
Iron	ppm	ASTM D5185m	>750	9	9	9
Chromium	ppm	ASTM D5185m	>9	0	0	0
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>40	0	<1	<1
Lead	ppm	ASTM D5185m	>15	0	<1	0
Copper	ppm	ASTM D5185m	>40	▲ 123	28	▲ 68
Tin	ppm	ASTM D5185m	>10	0	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	6	2	<1	2
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	<1	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	145	97	99	91
Calcium	ppm	ASTM D5185m	3570	3554	3660	3382
Phosphorus	ppm	ASTM D5185m	1290	1061	1063	964
Zinc	ppm	ASTM D5185m	1640	1231	1284	1202
Sulfur	ppm	ASTM D5185m		4026	4193	3755

CONTAMINANTS




method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>75	23	32	28
Sodium	ppm	ASTM D5185m	>51	2	6	3
Potassium	ppm	ASTM D5185m	>20	0	0	0

VISUAL

method	limit/base	current	history1	history2		
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG







OIL ANALYSIS REPORT

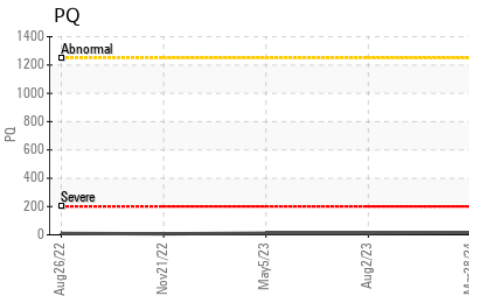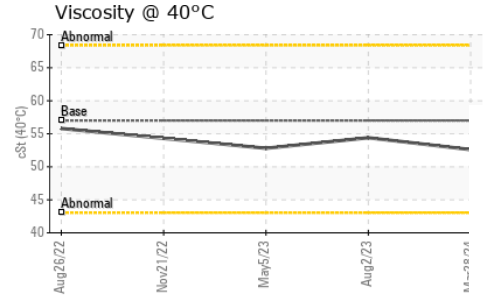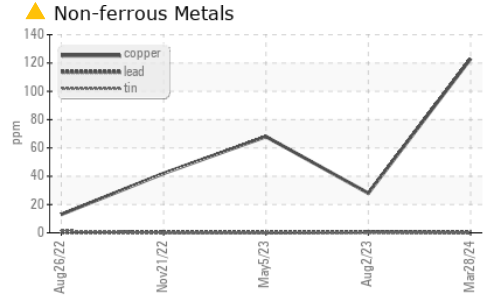

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	57.0	54.4	52.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

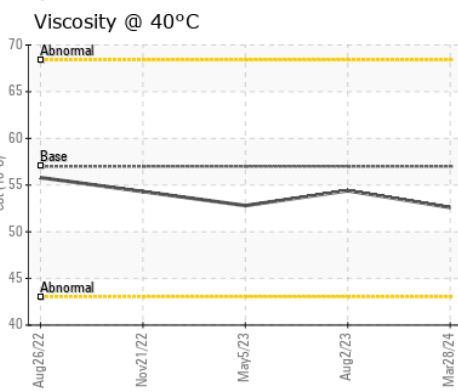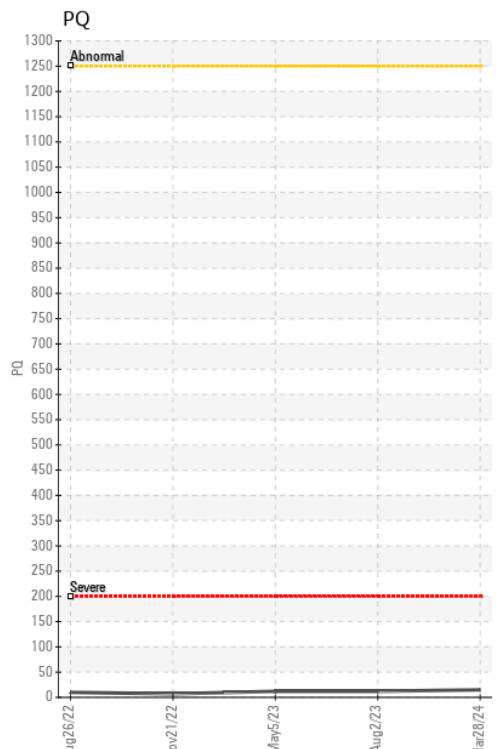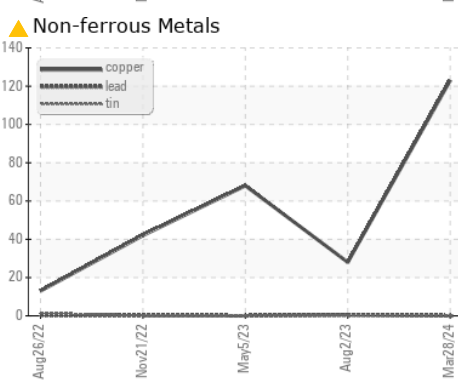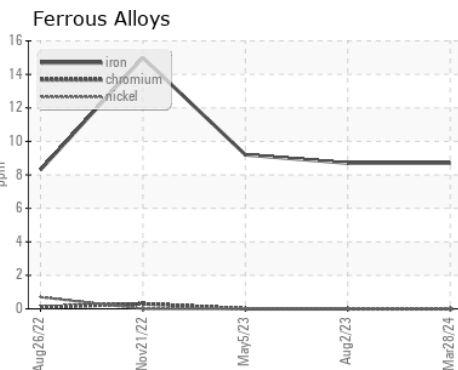

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MT0006216 **Received** : 08 Apr 2024
Lab Number : 06141620 **Tested** : 09 Apr 2024
Unique Number : 10966428 **Diagnosed** : 10 Apr 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

MURPHY TRACTOR - CAMBRIDGE
 60611 HULSE DRIVE
 CAMBRIDGE, OH
 US 43725
 Contact: DUSTIN DAILEY
 DDAILEY@MURPHYTRACTOR.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (740)439-2325