




# OIL ANALYSIS REPORT



Area  
**OKLAHOMA/102**  
 Machine Id  
**20.206L [OKLAHOMA^102]**  
 Component  
**Left Final Drive**  
 Fluid  
**MOBIL 50W (1 GAL)**

### Sample Rating Trend

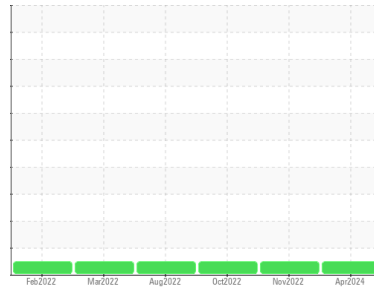

**NORMAL**



### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The condition of the oil is acceptable for the time in service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0914557</b>	WC0741063	WC0726164
Sample Date	Client Info		<b>02 Apr 2024</b>	16 Nov 2022	07 Oct 2022
Machine Age	hrs	Client Info	<b>2000</b>	1214	883
Oil Age	hrs	Client Info	<b>1117</b>	331	883
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>800	<b>418</b>	143	231
Chromium	ppm	ASTM D5185m	>10	<b>6</b>	2	4
Nickel	ppm	ASTM D5185m	>5	<b>2</b>	<1	0
Titanium	ppm	ASTM D5185m	>15	<b>1</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>75	<b>7</b>	2	2
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>75	<b>3</b>	<1	1
Tin	ppm	ASTM D5185m	>8	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	<1

### ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>46</b>	35	56
Barium	ppm	ASTM D5185m		<b>3</b>	0	6
Molybdenum	ppm	ASTM D5185m		<b>2</b>	3	0
Manganese	ppm	ASTM D5185m		<b>5</b>	2	5
Magnesium	ppm	ASTM D5185m		<b>23</b>	26	<1
Calcium	ppm	ASTM D5185m		<b>2639</b>	2530	15
Phosphorus	ppm	ASTM D5185m		<b>1064</b>	898	485
Zinc	ppm	ASTM D5185m		<b>1157</b>	1067	111
Sulfur	ppm	ASTM D5185m		<b>12396</b>	11534	18053

### CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>400	<b>42</b>	12	19
Sodium	ppm	ASTM D5185m		<b>3</b>	1	0
Potassium	ppm	ASTM D5185m	>20	<b>8</b>	2	14

### VISUAL

	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>NONE</b>	MODER	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG






# OIL ANALYSIS REPORT

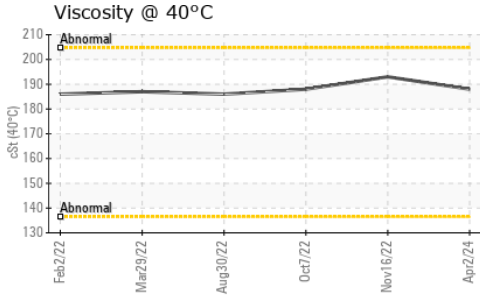

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	<b>188</b>	193.0	188

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

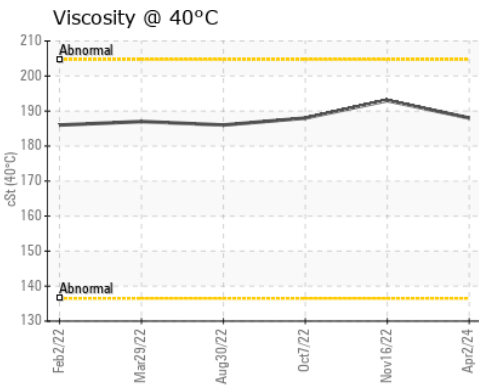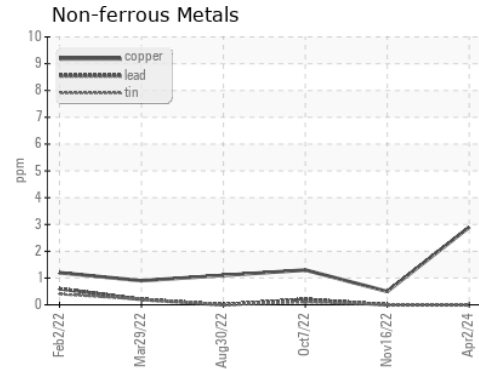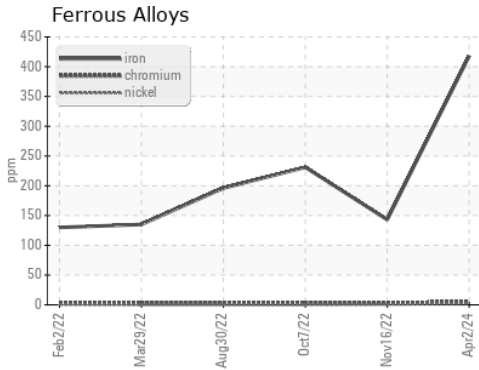

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0914557  
**Lab Number** : 06141761  
**Unique Number** : 10966569  
**Test Package** : CONST

**Received** : 08 Apr 2024  
**Tested** : 09 Apr 2024  
**Diagnosed** : 09 Apr 2024 - Wes Davis

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: BILL ORCUTT  
 william.orcutt@wildcat.net  
 T: (719)499-6303  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)