




# OIL ANALYSIS REPORT



Machine Id  
**LINK-BELT 218V V2L4-7706**  
 Component  
**Rear Winch**  
 Fluid  
**GEAR OIL SAE 90 (8 GAL)**

### Sample Rating Trend

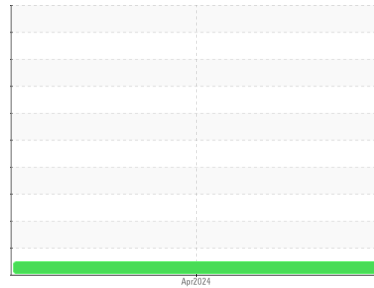

**NORMAL**



### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.  
 Please specify the brand, type, and viscosity of the oil on your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The condition of the oil is acceptable for the time in service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>LBC0000029</b>	---	---
Sample Date	Client Info		<b>04 Apr 2024</b>	---	---
Machine Age	hrs	Client Info	<b>100</b>	---	---
Oil Age	hrs	Client Info	<b>100</b>	---	---
Oil Changed	Client Info		<b>Not Chngd</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

### CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	---	---

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >150	<b>3</b>	---	---
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m >10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >5	<b>2</b>	---	---
Lead	ppm	ASTM D5185m >15	<b>0</b>	---	---
Copper	ppm	ASTM D5185m >80	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185m	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 400	<b>&lt;1</b>	---	---
Barium	ppm	ASTM D5185m 200	<b>11</b>	---	---
Molybdenum	ppm	ASTM D5185m 12	<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m 12	<b>2</b>	---	---
Calcium	ppm	ASTM D5185m 150	<b>13</b>	---	---
Phosphorus	ppm	ASTM D5185m 1650	<b>362</b>	---	---
Zinc	ppm	ASTM D5185m 125	<b>3</b>	---	---
Sulfur	ppm	ASTM D5185m 22500	<b>30858</b>	---	---


### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	---	---
Sodium	ppm	ASTM D5185m	<b>2</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>1</b>	---	---

### VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual >0.2	<b>NEG</b>	---	---
Free Water	scalar	*Visual	<b>NEG</b>	---	---




# OIL ANALYSIS REPORT

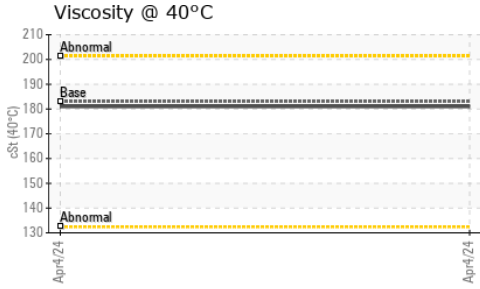

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 183	<b>181</b>	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

## GRAPHS

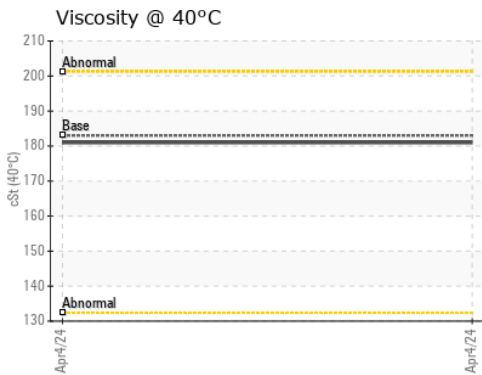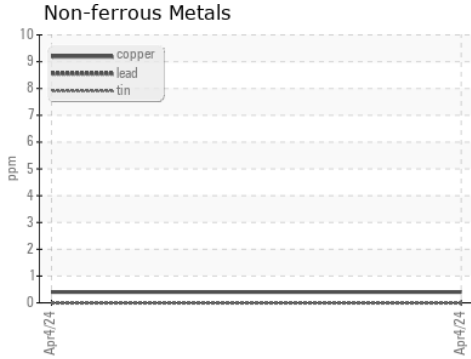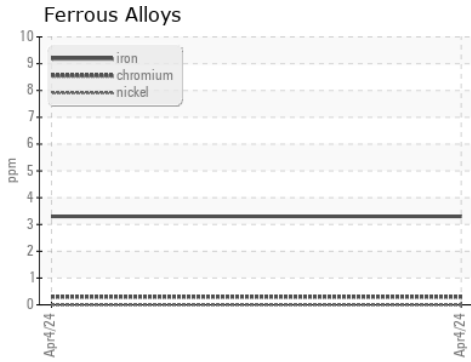

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LBC0000029  
**Lab Number** : 06141776  
**Unique Number** : 10966584  
**Test Package** : CONST

**Received** : 08 Apr 2024  
**Tested** : 09 Apr 2024  
**Diagnosed** : 09 Apr 2024 - Wes Davis

**Columbus Equipment Co. - P103900**  
 2329 Performance Way  
 Columbus, OH  
 US 43207  
 Contact: Brody Parsons  
 brodeyp@columbusequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: