


# **OIL ANALYSIS REPORT**

AA7 **MAZAK 314401** 

Spindel

**FUCHS RENOLIN ZAF B 10 HT ZINC FREE** 

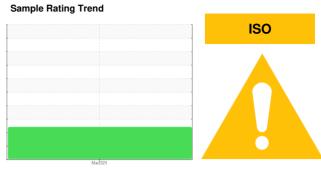

## **DIAGNOSIS**

### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

# Contamination

There is a high amount of particulates present in the fluid.


### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

(9 GAL)						
SAMPLE INFORM	MATION	method	limit/base	ourropt	history1	hiotony
	VIATION		IIIIIII/Dase	current	HISTORY	history2
Sample Number		Client Info		FCH0000040		
Sample Date		Client Info		27 Mar 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>100	4		
Chromium	ppm	ASTM D5185m	>2	0		
Nickel	ppm	ASTM D5185m	>2	0		
Γitanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>2	0		
_ead	ppm	ASTM D5185m	>25	0		
Copper	ppm	ASTM D5185m	>7	<1		
Γin	ppm	ASTM D5185m	>10	0		
/anadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		0		
Calcium	ppm	ASTM D5185m		0		
Phosphorus	ppm	ASTM D5185m		39		
Zinc						
	ppm	ASTM D5185m		14		
Sulfur	ppm	ASTM D5185m ASTM D5185m		14 1272		
Sulfur CONTAMINANTS	ppm		limit/base			
CONTAMINANTS	ppm	ASTM D5185m	limit/base	1272		
CONTAMINANTS Silicon	ppm	ASTM D5185m method		1272 current	history1	history2
CONTAMINANTS Silicon Sodium	ppm ppm ppm	ASTM D5185m  method  ASTM D5185m	>20	1272  current 0	history1	history2
CONTAMINANTS Silicon Sodium Potassium	ppm S ppm	ASTM D5185m  method  ASTM D5185m  ASTM D5185m	>20	1272	history1	history2
CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm %	ASTM D5185m  method  ASTM D5185m  ASTM D5185m  ASTM D5185m	>20	1272	history1	history2
CONTAMINANTS Silicon Sodium Potassium Water FLUID CLEANLIN	ppm ppm ppm ppm ppm %	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	>20 >20 >0.1	1272 current 0 1 0 NEG	 history1  	history2
CONTAMINANTS Silicon Sodium Potassium Vater FLUID CLEANLIN Particles >4µm	ppm ppm ppm ppm ppm %	ASTM D5185m  method  ASTM D5185m  ASTM D5185m  ASTM D5185m  ASTM D6304  method  ASTM D7647	>20 >20 >0.1 limit/base	current 0 1 0 NEG current	history1 history1	history2
CONTAMINANTS Silicon Sodium Potassium Vater FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm ppm ppm %	Method ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 Method ASTM D7647 ASTM D7647	>20 >20 >0.1 limit/base >10000	1272  current  0  1  0  NEG  current  28895	history1 history1	history2
CONTAMINANTS Silicon Sodium Potassium Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm ppm ppm %	Method ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	>20 >20 >0.1 limit/base >10000 >2500 >160	1272  current  0 1 0 NEG  current  28895  10489  1299	history1 history1	history2
CONTAMINANTS Silicon Sodium Potassium Water FLUID CLEANLIN Particles >4µm Particles >14µm Particles >14µm Particles >21µm	ppm ppm ppm ppm ppm %	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20 >20 >0.1 limit/base >10000 >2500 >160 >40	1272  current  0 1 0 NEG  current  28895  10489  1299  430	history1 history1 history1	history2
CONTAMINANTS Silicon Sodium Potassium Water FLUID CLEANLIN Particles >4µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm ppm ppm ppm %	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20 >20 >0.1 limit/base >10000 >2500 >160 >40 >10	1272  current  0 1 0 NEG  current  28895  10489  1299  430  29	history1 history1 history1	history2
Silicon Sodium Potassium Water	ppm ppm ppm ppm ppm %	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20 >20 >0.1 limit/base >10000 >2500 >160 >40	1272  current  0 1 0 NEG  current  28895  10489  1299  430	history1 history1 history1	history2
CONTAMINANTS Silicon Sodium Potassium Water FLUID CLEANLIN Particles >4µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm Particles >71µm	ppm ppm ppm ppm % NESS	Method ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D6304 Method ASTM D7647	>20 >20 >0.1 limit/base >10000 >2500 >160 >40 >10 >3	1272  current  0 1 0 NEG  current  28895  10489  1299  430  29 2	history1 history1	history2



# **OIL ANALYSIS REPORT**

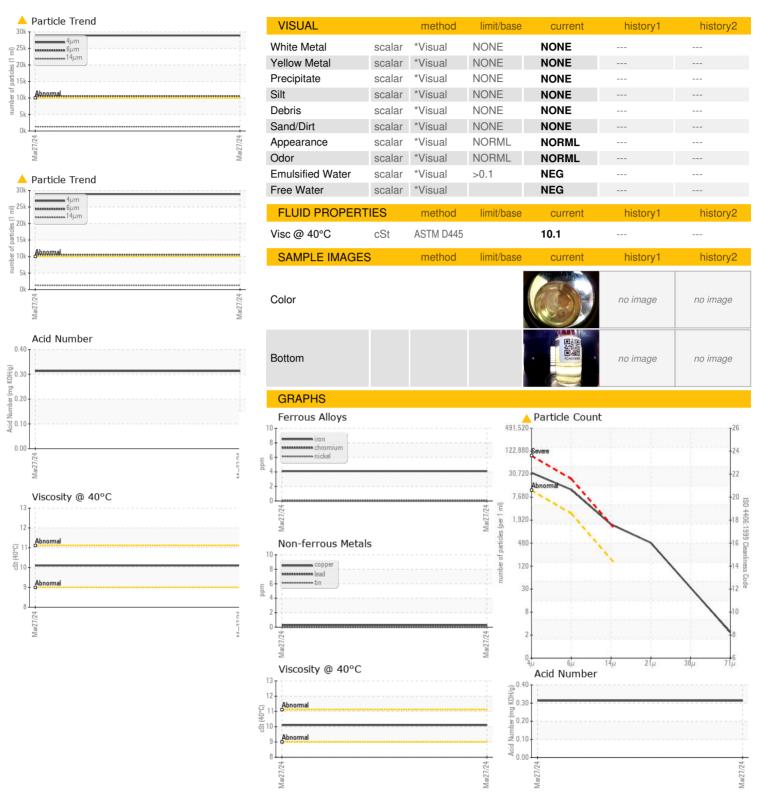





Certificate 12367

Laboratory Sample No.

Lab Number : 06141880 Unique Number : 10966688

: FCH0000040 Test Package : PLANT

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 08 Apr 2024 **Tested** 

: 10 Apr 2024 Diagnosed : 10 Apr 2024 - Doug Bogart 2400 SAGAMORE PKWY S #2400 LAFAYETTE, IN US 47905

**DANA - FAIRFIELD CUSTOM GEARS AND DRIVES** 

Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: UCDANLAF [WUSCAR] 06141880 (Generated: 04/15/2024 11:08:43) Rev: 1

Submitted By: GODWIN GEORGE

T:

F: