

OIL ANALYSIS REPORT

Sample Rating Trend



AAA MAZAK 314301

Spindel

Area

Fluid FUCHS RENOLIN ZAF B 10 HT ZINC FREE (9 GAL)

DIAGNOSIS

A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

A Wear

The copper level is abnormal. All other component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 6 microns in size) present in the fluid.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		FCH0000020		
Sample Date		Client Info		27 Mar 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	10		
Chromium	ppm	ASTM D5185m	>2	0		
Nickel	ppm	ASTM D5185m	>2	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>2	0		
Lead	ppm	ASTM D5185m	>25	0		
Copper	ppm	ASTM D5185m		▲ 73		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m	~10	0		
Cadmium	ppm	ASTM D5185m		0		
	ppm			U		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		0		
Calcium	ppm	ASTM D5185m		7		
Phosphorus	ppm	ASTM D5185m		53		
Zinc	ppm	ASTM D5185m		55		
Sulfur	ppm	ASTM D5185m		1022		
CONTAMINANTS	i	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	2		
Sodium	ppm	ASTM D5185m		2		
Potassium	ppm	ASTM D5185m	>20	0		
Water	%	ASTM D6304	>0.1	NEG		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	10538		
Particles >6µm		ASTM D7647	>2500	988		
Particles >14µm		ASTM D7647	>160	66		
Particles >21µm		ASTM D7647		17		
Particles >38µm		ASTM D7647	>10	1		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>20/18/14	21/17/13		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.045		
	ing roning	, 10 1 11 20040		0.045		



OIL ANALYSIS REPORT

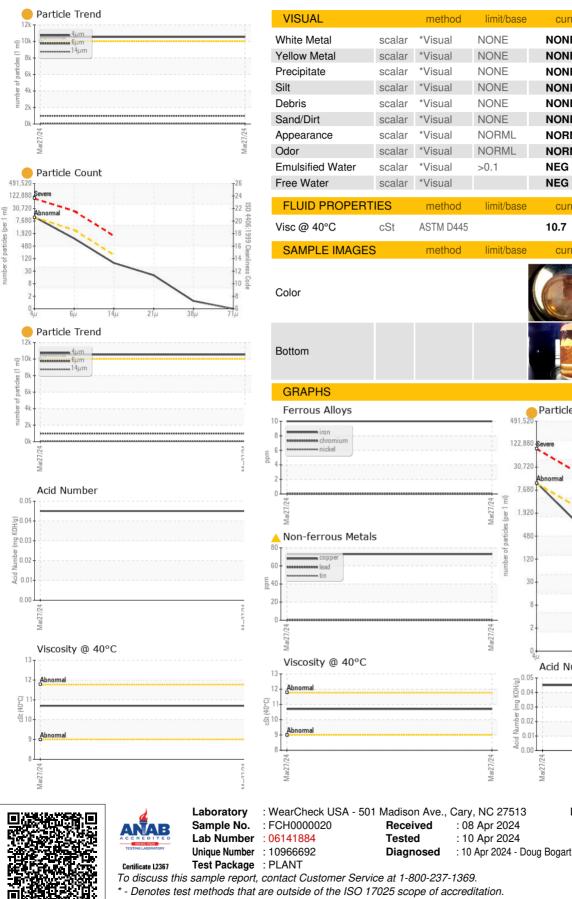

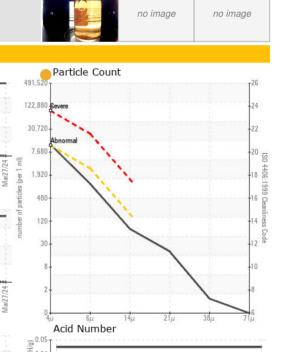

history1

history

history1

no image

current

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

current

current

NEG

NEG

10.7

동 0.04

Ē 0.03

- ² 0.02

Acid

Mar27/24 -

0.01

0.00

Var77

history2

history

history2

no image

LAFAYETTE, IN US 47905 Contact: Service Manager T:

F:

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: UCDANLAF [WUSCAR] 06141884 (Generated: 04/25/2024 00:00:54) Rev: 1

Submitted By: GODWIN GEORGE Page 2 of 2

DANA - FAIRFIELD CUSTOM GEARS AND DRIVES

2400 SAGAMORE PKWY S #2400