



# OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id

## SPACE X CASTROL MAGNA SW 68

Component

New (Unused) Oil

Fluid

{not provided} (--- GAL)

### DIAGNOSIS

#### ▲ Recommendation

We advise that you filter this fluid before use.

#### ▲ Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>TLC06141915</b>	---	---
Sample Date	Client Info		<b>07 Apr 2024</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>ABNORMAL</b>	---	---

WEAR METALS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	<b>0</b>	---	---
Chromium	ppm	ASTM D5185m	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m	<b>0</b>	---	---
Silver	ppm	ASTM D5185m	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185m	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185m	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	---	---
Barium	ppm	ASTM D5185m	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>0</b>	---	---
Manganese	ppm	ASTM D5185m	<b>0</b>	---	---
Magnesium	ppm	ASTM D5185m	<b>2</b>	---	---
Calcium	ppm	ASTM D5185m	<b>2</b>	---	---
Phosphorus	ppm	ASTM D5185m	<b>2</b>	---	---
Zinc	ppm	ASTM D5185m	<b>0</b>	---	---
Sulfur	ppm	ASTM D5185m	<b>8113</b>	---	---






CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	<b>6</b>	---	---
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	---	---
Water	%	ASTM D6304	<b>NEG</b>	---	---

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>56735</b>	---	---
Particles >6µm	ASTM D7647	>1300	▲ <b>19293</b>	---	---
Particles >14µm	ASTM D7647	>160	▲ <b>1661</b>	---	---
Particles >21µm	ASTM D7647	>40	▲ <b>471</b>	---	---
Particles >38µm	ASTM D7647	>10	▲ <b>27</b>	---	---
Particles >71µm	ASTM D7647	>3	<b>1</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ <b>23/21/18</b>	---	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.33</b>	---	---



# OIL ANALYSIS REPORT

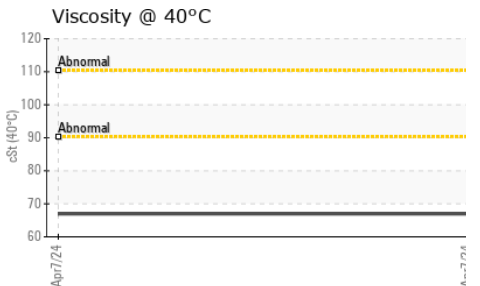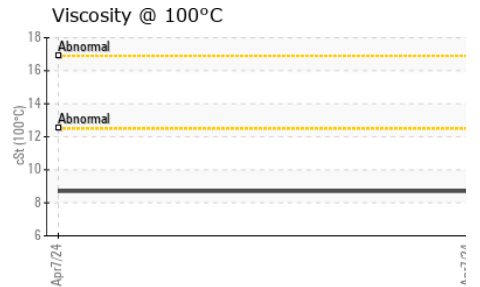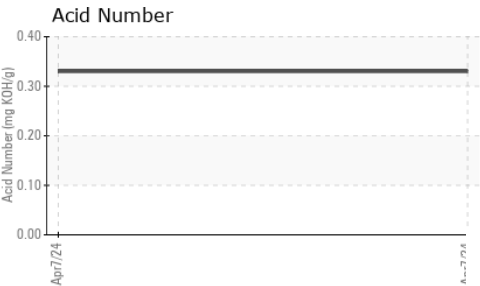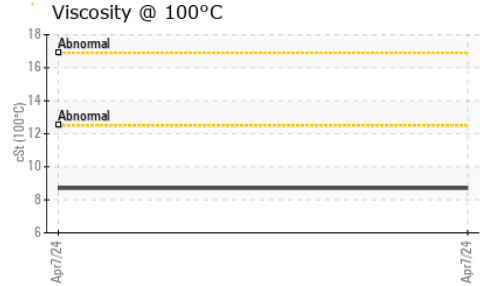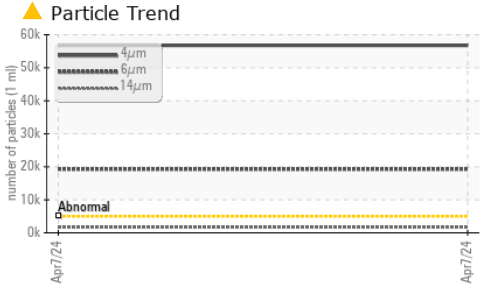





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	NEG	---	---
Free Water	scalar	*Visual	NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	66.96	---	---
Visc @ 100°C	cSt	ASTM D445	8.7	---	---
Viscosity Index (VI)	Scale	ASTM D2270	101	---	---

### SAMPLE IMAGES

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

### GRAPHS

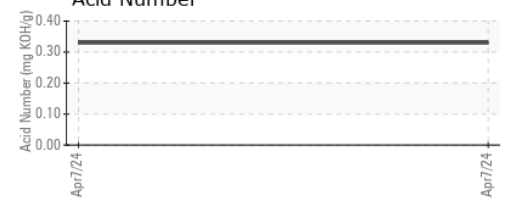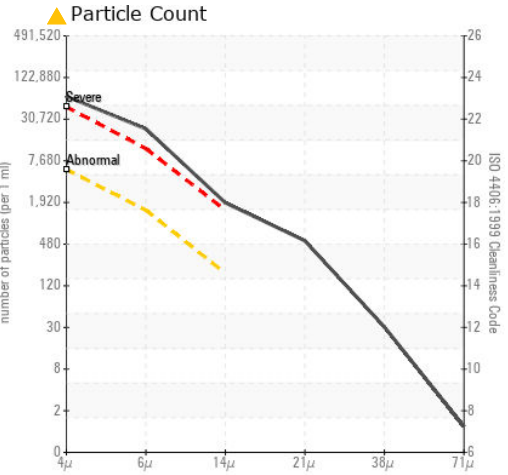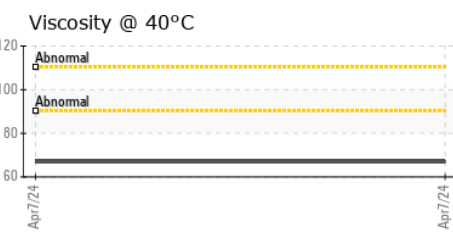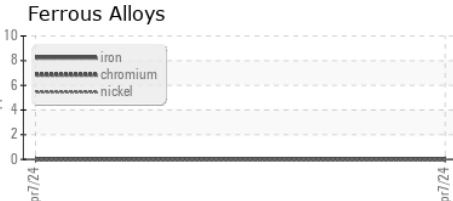

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TLC06141915      **Received** : 08 Apr 2024  
**Lab Number** : 06141915      **Tested** : 08 Apr 2024  
**Unique Number** : 10966723      **Diagnosed** : 08 Apr 2024 - Doug Bogart  
**Test Package** : PLANT ( Additional Tests: FT-IR, KV100, VI )

**Taylor Lubricants - Spartanburg - Head Office**  
 135 North Church Street  
 Spartanburg, SC  
 US 29306  
 Contact: ERIC TAYLOR  
 etaylor@taylorlubricants.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)