




# OIL ANALYSIS REPORT

Area  
**381.636**  
 Machine Id  
**TEREX 8400 T MAY**  
 Component  
**Diesel Engine**  
 Fluid  
**CHEVRON DELO 400 MULTIGRADE 15W40 (--- GAL)**

Sample Rating Trend

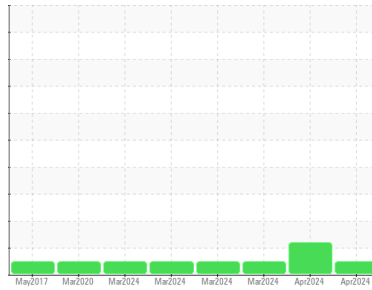

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0789630</b>	WC0789631	WC0789628
Sample Date	Client Info		<b>07 Apr 2024</b>	06 Apr 2024	27 Mar 2024
Machine Age	hrs	Client Info	<b>25714</b>	12755	39161
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	ATTENTION	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>6</b>	4	5
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	<1	2
Lead	ppm	ASTM D5185m >40	<b>0</b>	6	0
Copper	ppm	ASTM D5185m >330	<b>1</b>	3	0
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 151	<b>263</b>	16	290
Barium	ppm	ASTM D5185m 0.4	<b>0</b>	3	0
Molybdenum	ppm	ASTM D5185m 250	<b>95</b>	66	95
Manganese	ppm	ASTM D5185m	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m 0	<b>514</b>	1027	524
Calcium	ppm	ASTM D5185m 2046	<b>1922</b>	1204	1962
Phosphorus	ppm	ASTM D5185m 1043	<b>850</b>	1083	845
Zinc	ppm	ASTM D5185m 943	<b>954</b>	1323	996
Sulfur	ppm	ASTM D5185m 5012	<b>3366</b>	4659	3471

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	16	4
Sodium	ppm	ASTM D5185m	<b>1</b>	3	<1
Potassium	ppm	ASTM D5185m >20	<b>1</b>	0	2

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.7</b>	0.1	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.1</b>	5.5	6.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.5</b>	18.3	22.4


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.3</b>	13.9	16.5
Base Number (BN)	mg KOH/g	ASTM D2896 12.5	<b>9.2</b>	10.9	8.7




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

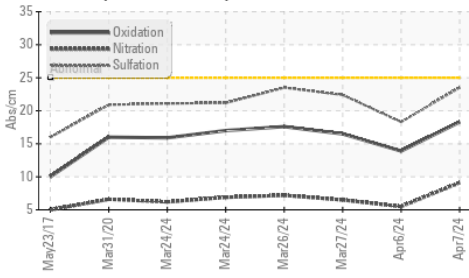

Base Number

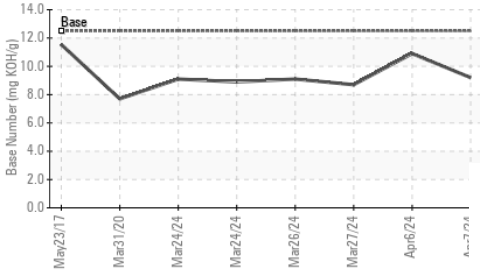

Viscosity @ 100°C

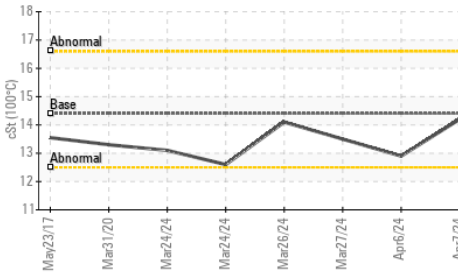


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	14.2	12.9

## GRAPHS


Ferrous Alloys

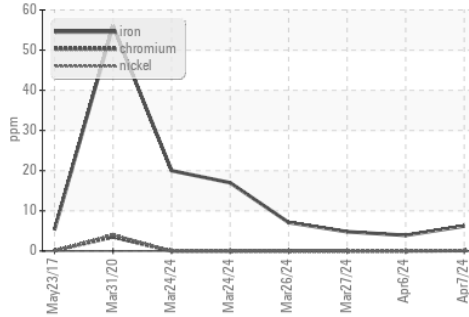


Non-ferrous Metals

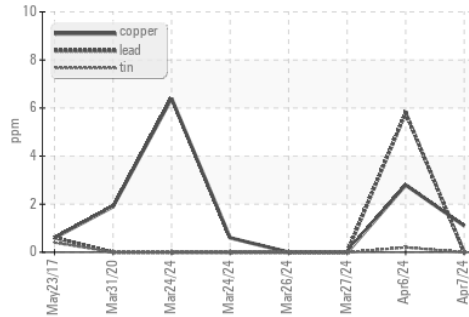

Viscosity @ 100°C

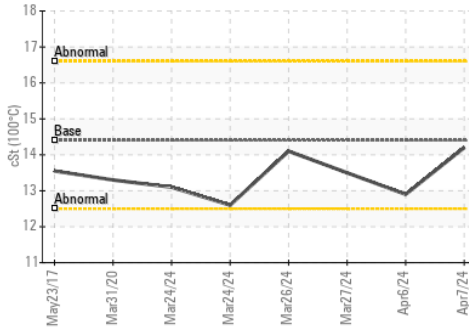

Base Number

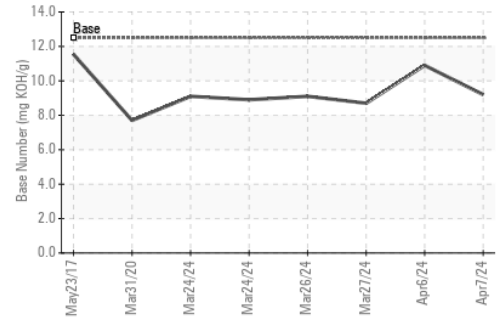

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : WC0789630  
 Lab Number : 06141951  
 Unique Number : 10966759  
 Test Package : FLEET

Received : 08 Apr 2024  
 Tested : 09 Apr 2024  
 Diagnosed : 09 Apr 2024 - Wes Davis

## ASSOCIATED TERMINALS - CRANE

CONVENT, LA  
 US 70723

Contact: GREG JOSEY  
 gjosey@associatedterminals.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (225)562-3515