




# OIL ANALYSIS REPORT

Sample Rating Trend

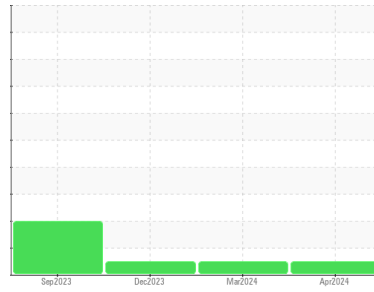

**NORMAL**



Area  
**Bernardsville**  
 Machine Id  
**MACK 6769**  
 Component  
**Diesel Engine**  
 Fluid  
**GIBRALTAR 15W/40 SUPER S-3 LX (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2    |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info |             |            | <b>WC0900069</b>   | WC0900066   | WC0875335   |
| Sample Date        | Client Info |             |            | <b>02 Apr 2024</b> | 15 Mar 2024 | 16 Dec 2023 |
| Machine Age        | hrs         | Client Info |            | <b>0</b>           | 0           | 973         |
| Oil Age            | hrs         | Client Info |            | <b>1844</b>        | 0           | 0           |
| Oil Changed        | Client Info |             |            | <b>Changed</b>     | Not Changd  | Not Changd  |
| Sample Status      |             |             |            | <b>NORMAL</b>      | NORMAL      | NORMAL      |

| CONTAMINATION |           | method | limit/base | current        | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel          | WC Method | >5     |            | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water         | WC Method | >0.2   |            | <b>NEG</b>     | NEG      | NEG      |
| Glycol        | WC Method |        |            | <b>NEG</b>     | NEG      | NEG      |

| WEAR METALS |     | method      | limit/base | current      | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185m | >110       | <b>8</b>     | 36       | 15       |
| Chromium    | ppm | ASTM D5185m | >4         | <b>&lt;1</b> | <1       | <1       |
| Nickel      | ppm | ASTM D5185m | >2         | <b>0</b>     | 3        | 3        |
| Titanium    | ppm | ASTM D5185m |            | <b>&lt;1</b> | 0        | 0        |
| Silver      | ppm | ASTM D5185m | >2         | <b>0</b>     | <1       | 1        |
| Aluminum    | ppm | ASTM D5185m | >25        | <b>3</b>     | 2        | 2        |
| Lead        | ppm | ASTM D5185m | >45        | <b>0</b>     | 0        | <1       |
| Copper      | ppm | ASTM D5185m | >85        | <b>2</b>     | 55       | 65       |
| Tin         | ppm | ASTM D5185m | >4         | <b>0</b>     | 2        | 1        |
| Vanadium    | ppm | ASTM D5185m |            | <b>&lt;1</b> | 0        | <1       |
| Cadmium     | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |

| ADDITIVES  |     | method      | limit/base | current      | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185m |            | <b>10</b>    | 12       | 23       |
| Barium     | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |
| Molybdenum | ppm | ASTM D5185m | 66         | <b>58</b>    | 65       | 65       |
| Manganese  | ppm | ASTM D5185m |            | <b>&lt;1</b> | 1        | <1       |
| Magnesium  | ppm | ASTM D5185m | 1000       | <b>885</b>   | 714      | 661      |
| Calcium    | ppm | ASTM D5185m | 1050       | <b>1303</b>  | 1408     | 1325     |
| Phosphorus | ppm | ASTM D5185m | 1150       | <b>1073</b>  | 937      | 953      |
| Zinc       | ppm | ASTM D5185m | 1270       | <b>1313</b>  | 1223     | 1188     |
| Sulfur     | ppm | ASTM D5185m |            | <b>3890</b>  | 2955     | 3029     |




| CONTAMINANTS |     | method      | limit/base | current  | history1 | history2 |
|--------------|-----|-------------|------------|----------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >30        | <b>3</b> | 11       | 10       |
| Sodium       | ppm | ASTM D5185m |            | <b>1</b> | 4        | 4        |
| Potassium    | ppm | ASTM D5185m | >20        | <b>2</b> | 2        | 3        |

| INFRA-RED |          | method      | limit/base | current     | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 | >3         | <b>0.3</b>  | 0.7      | 0.4      |
| Nitration | Abs/cm   | *ASTM D7624 | >20        | <b>6.3</b>  | 10.5     | 8.4      |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30        | <b>18.7</b> | 22.9     | 19.8     |

| FLUID DEGRADATION |          | method      | limit/base | current     | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation         | Abs/.1mm | *ASTM D7414 | >25        | <b>14.0</b> | 18.9     | 15.1     |
| Base Number (BN)  | mg KOH/g | ASTM D2896  | 10.1       | <b>8.4</b>  | 4.9      | 7.98     |











# OIL ANALYSIS REPORT

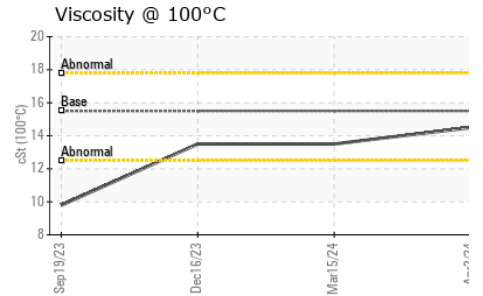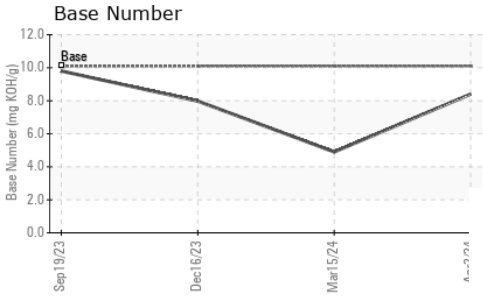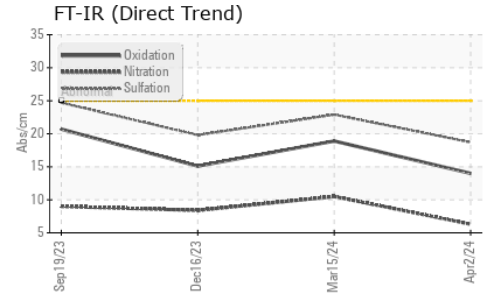

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.5    | 14.5     | 13.5     |

### GRAPHS

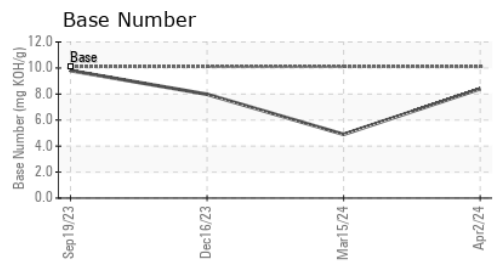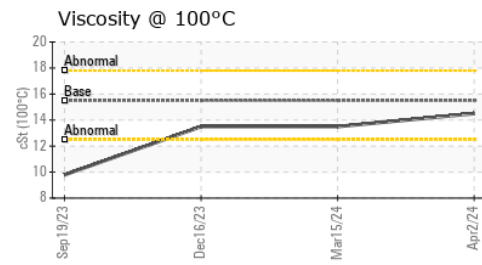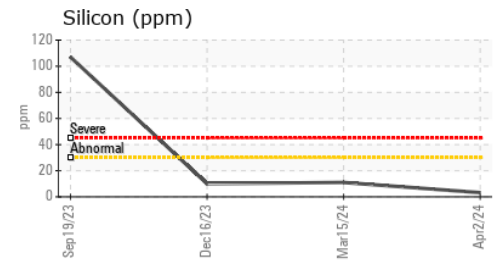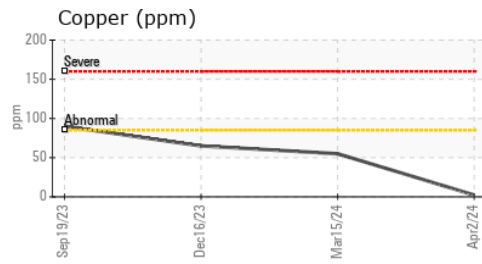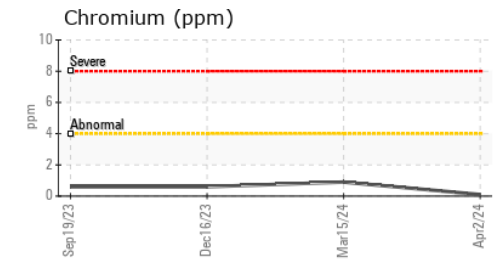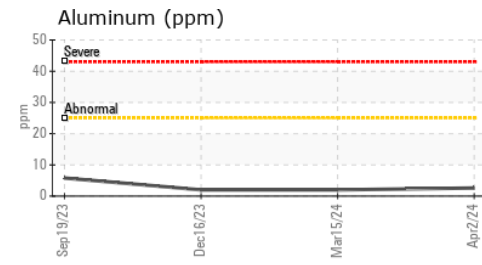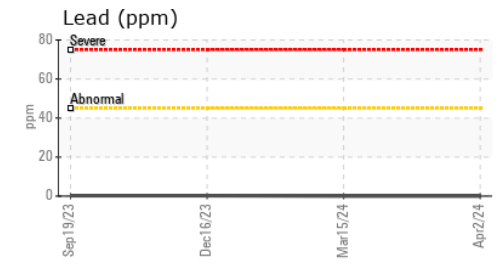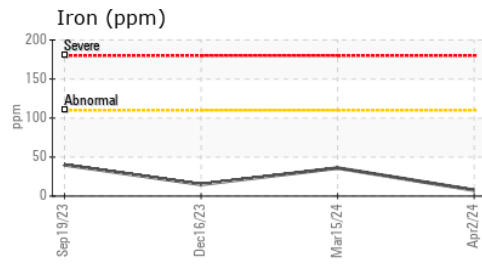

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0900069      **Received** : 08 Apr 2024  
**Lab Number** : 06142011      **Tested** : 09 Apr 2024  
**Unique Number** : 10966819      **Diagnosed** : 09 Apr 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**INTERSTATE WASTE-BERNARDSVILLE**  
 33 OLD QUARRY ROAD  
 BERNARDSVILLE, NJ  
 US 07924  
 Contact: Pablo Chardon  
 PChardon@interstatewaste.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)