




# OIL ANALYSIS REPORT



Area  
**OKLAHOMA/102/EG - DOZER**  
 Machine Id  
**38.83 [OKLAHOMA^102^EG - DOZER]**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

Sample Rating Trend

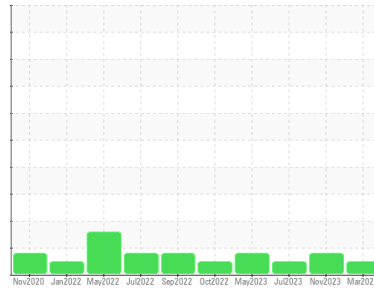

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0883982</b>	WC0833775	WC0746897
Sample Date	Client Info		<b>22 Mar 2024</b>	16 Nov 2023	15 Jul 2023
Machine Age	hrs	Client Info	<b>9501</b>	9263	9017
Oil Age	hrs	Client Info	<b>0</b>	1046	8217
Oil Changed	Client Info		<b>Changed</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	MARGINAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	▲ 2.9	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>26</b>	23	36
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>6</b>	3	3
Lead	ppm	ASTM D5185m >40	<b>1</b>	<1	0
Copper	ppm	ASTM D5185m >330	<b>56</b>	47	121
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	2
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>39</b>	27	20
Barium	ppm	ASTM D5185m 10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 100	<b>38</b>	39	43
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 450	<b>482</b>	494	552
Calcium	ppm	ASTM D5185m 3000	<b>1818</b>	1725	1835
Phosphorus	ppm	ASTM D5185m 1150	<b>787</b>	734	742
Zinc	ppm	ASTM D5185m 1350	<b>956</b>	912	978
Sulfur	ppm	ASTM D5185m 4250	<b>3008</b>	2272	2622

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>9</b>	10	7
Sodium	ppm	ASTM D5185m >158	<b>4</b>	3	5
Potassium	ppm	ASTM D5185m >20	<b>1</b>	0	0

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1</b>	1	1.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.4</b>	8.8	11.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.0</b>	22.4	23.3


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>19.8</b>	19.4	21.3
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>9.7</b>	10.0	8.7




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

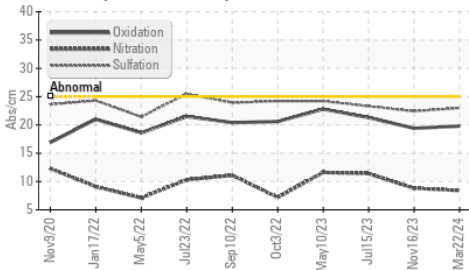

Base Number

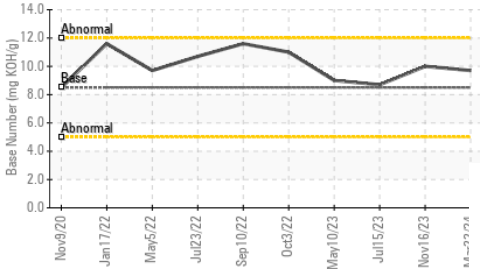

Viscosity @ 100°C

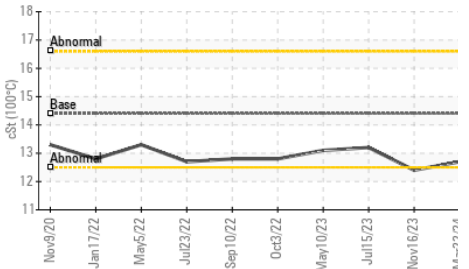


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	12.7	12.4

## GRAPHS


Ferrous Alloys

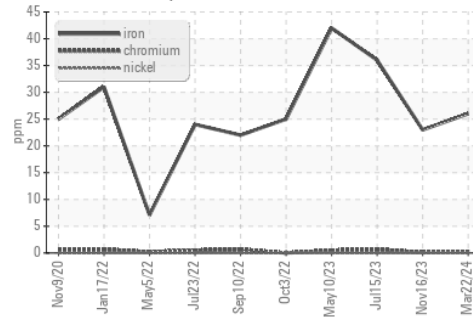


Non-ferrous Metals

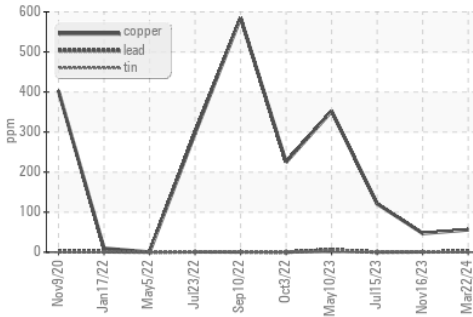

Viscosity @ 100°C

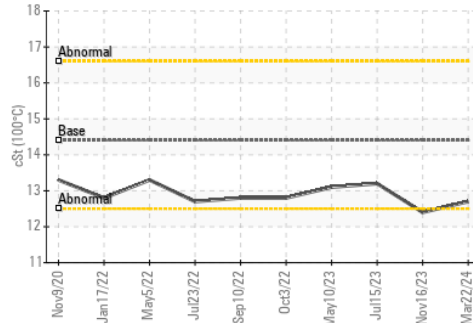

Base Number

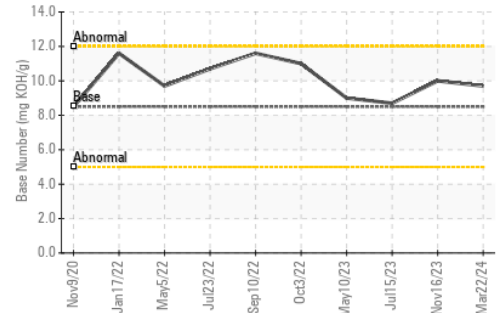

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0883982 **Received** : 08 Apr 2024  
**Lab Number** : 06142030 **Tested** : 09 Apr 2024  
**Unique Number** : 10966838 **Diagnosed** : 09 Apr 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: DOUG KING  
 doug.king@sherwood.net  
 T: (316)617-3161  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)