




OIL ANALYSIS REPORT

Sample Rating Trend

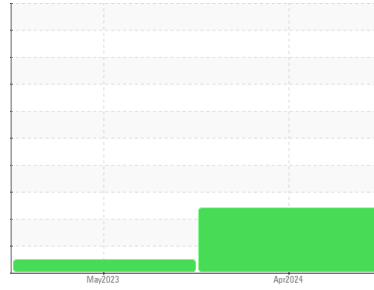

DEGRADATION



Machine Id
98172
 Component
Gasoline Engine
 Fluid
NAPA 5W30 (7 QTS)

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

▲ Wear

Cylinder, crank, or cam shaft wear is indicated.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

▲ Fluid Condition

The oil viscosity is lower than normal. The BN level is low. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		SBP0005026	SBP0003630	---
Sample Date	Client Info		03 Apr 2024	19 May 2023	---
Machine Age	mls	Client Info	88864	75827	---
Oil Age	mls	Client Info	7865	3765	---
Oil Changed	Client Info		Changed	Changed	---
Sample Status			ABNORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >150	▲ 160	19	---
Chromium	ppm	ASTM D5185m >20	2	<1	---
Nickel	ppm	ASTM D5185m >5	<1	0	---
Titanium	ppm	ASTM D5185m	0	0	---
Silver	ppm	ASTM D5185m >2	0	0	---
Aluminum	ppm	ASTM D5185m >40	5	<1	---
Lead	ppm	ASTM D5185m >50	0	0	---
Copper	ppm	ASTM D5185m >155	2	<1	---
Tin	ppm	ASTM D5185m >10	0	0	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	25	8	---
Barium	ppm	ASTM D5185m	0	0	---
Molybdenum	ppm	ASTM D5185m	64	63	---
Manganese	ppm	ASTM D5185m	4	<1	---
Magnesium	ppm	ASTM D5185m	464	987	---
Calcium	ppm	ASTM D5185m	1141	1138	---
Phosphorus	ppm	ASTM D5185m	622	1107	---
Zinc	ppm	ASTM D5185m	692	1334	---
Sulfur	ppm	ASTM D5185m	2727	4022	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	12	5	---
Sodium	ppm	ASTM D5185m >400	9	4	---
Potassium	ppm	ASTM D5185m >20	1	1	---
Fuel	%	ASTM D3524 >4.0	1.1	<1.0	---

INFRA-RED






	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0.1	0.1	---
Nitration	Abs/cm	*ASTM D7624 >20	11.5	6.6	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	24.6	20.5	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	20.8	17.9	---
Base Number (BN)	mg KOH/g	ASTM D2896	▲ 2.7	8.8	---







OIL ANALYSIS REPORT

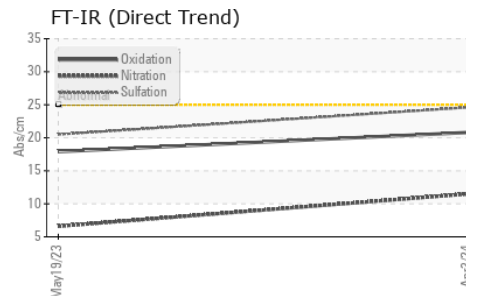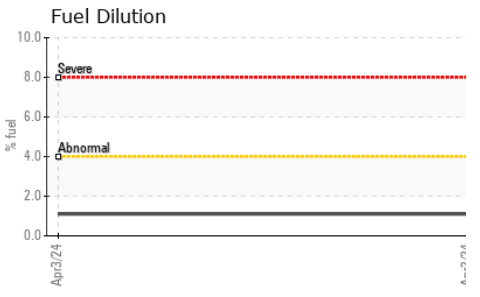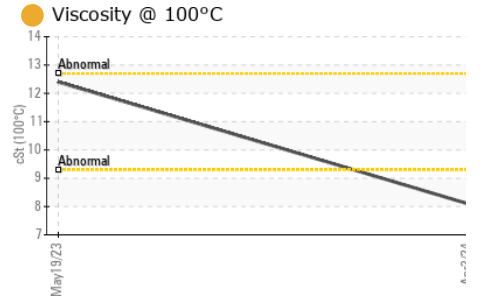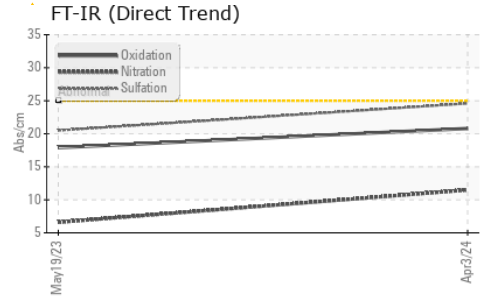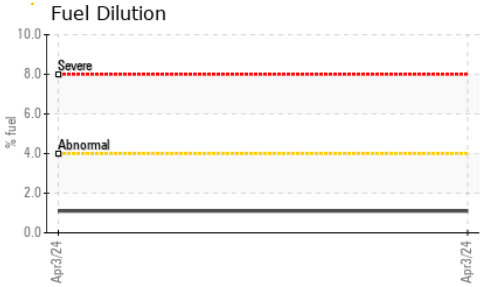

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	● 8.1	12.4	---

GRAPHS

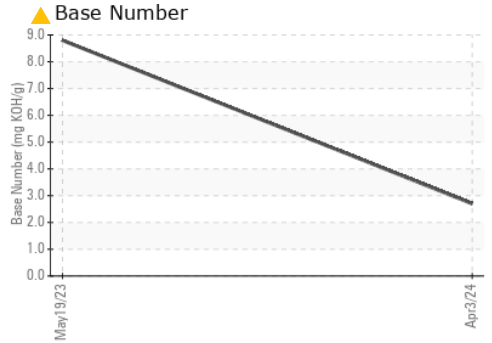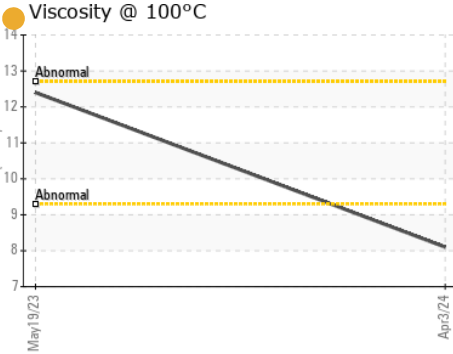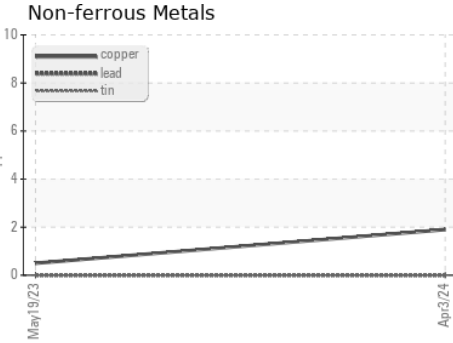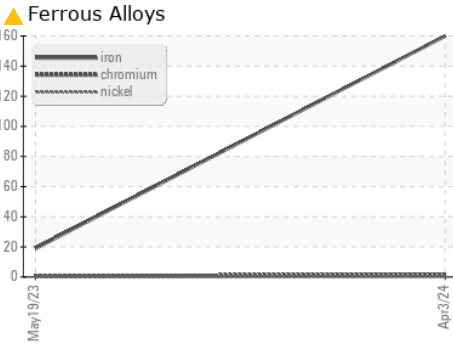

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : SBP0005026 **Received** : 08 Apr 2024
Lab Number : 06142115 **Tested** : 11 Apr 2024
Unique Number : 10966923 **Diagnosed** : 11 Apr 2024 - Jonathan Hester
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

Sapp Bros. Fleet - Council Bluffs Location
 2608 South 24th Street
 Council Bluffs, IA
 US 51501
 Contact: Mike Ashley
 mashley@sappbros.net
 T: (800)308-7818
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)