




OIL ANALYSIS REPORT

Sample Rating Trend

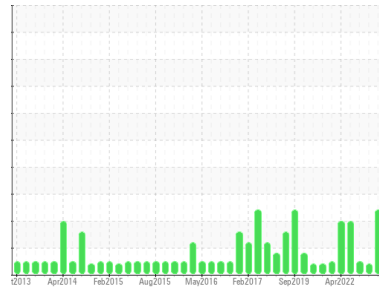

DIRT



Area

BRIAN RAFFERTY

Machine Id

[BRIAN RAFFERTY] 010 566616-10

Component

Steering

Fluid

CHEVRON RANDO HDZ 68 (175 GAL)

DIAGNOSIS

Recommendation

We advise that you check all areas where dirt can enter the system. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		MW0055646	MW0055661	MW0043165
Sample Date	Client Info		01 Apr 2024	01 Oct 2023	31 Oct 2022
Machine Age	hrs	Client Info	0	18000	0
Oil Age	hrs	Client Info	0	18000	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	ABNORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>50	2	<1	<1
Chromium	ppm	ASTM D5185m	>15	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>5	2	0	0
Lead	ppm	ASTM D5185m	>10	<1	<1	<1
Copper	ppm	ASTM D5185m	>50	9	9	7
Tin	ppm	ASTM D5185m	>5	<1	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	0	1	0	0
Molybdenum	ppm	ASTM D5185m	0	<1	<1	<1
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	0	1	<1	0
Calcium	ppm	ASTM D5185m	75	78	74	70
Phosphorus	ppm	ASTM D5185m	275	397	378	373
Zinc	ppm	ASTM D5185m	350	455	500	454
Sulfur	ppm	ASTM D5185m	550	1585	1704	1487

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>15	▲ 26	1	<1
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	2	0	0

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>2500	899	---	1534
Particles >6µm	ASTM D7647	>640	298	---	314
Particles >14µm	ASTM D7647	>80	32	---	16
Particles >21µm	ASTM D7647	>20	7	---	6
Particles >38µm	ASTM D7647	>4	1	---	1
Particles >71µm	ASTM D7647	>3	0	---	0
Oil Cleanliness	ISO 4406 (c)	>18/16/13	17/15/12	---	18/15/11


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.22	0.34	0.45




OIL ANALYSIS REPORT


▲ Silicon (ppm)

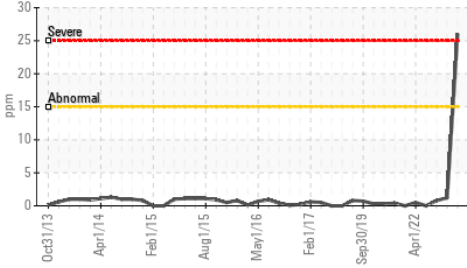


● Aluminum (ppm)

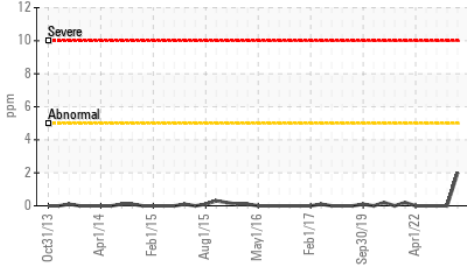


Particle Trend

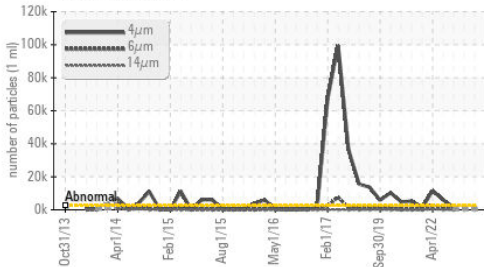

Acid Number

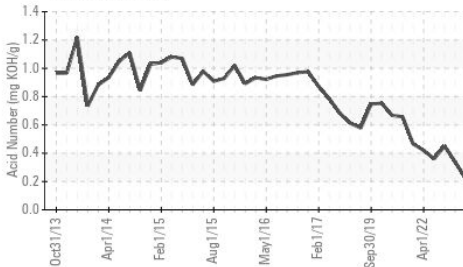


Viscosity @ 40°C

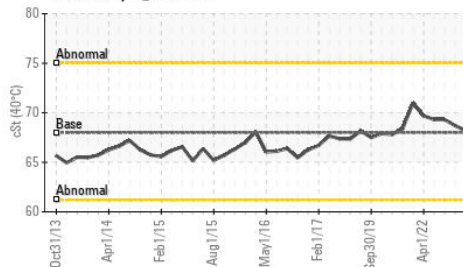





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	▲ MODER	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	68.0	68.2	68.7

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

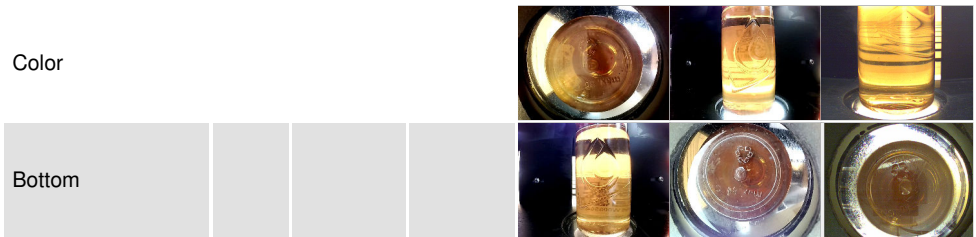

GRAPHS

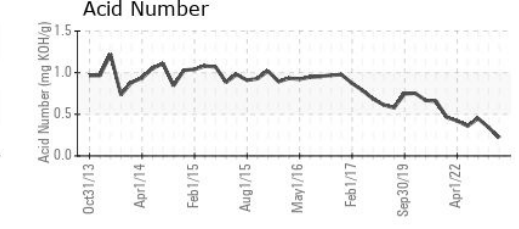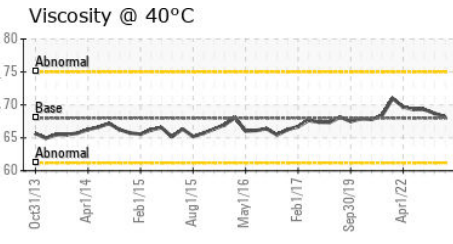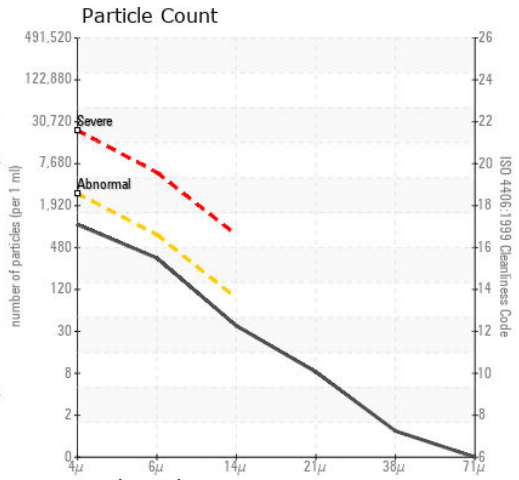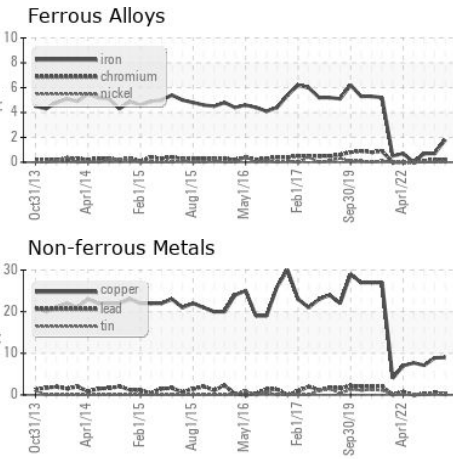

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0055646 **Received** : 08 Apr 2024
Lab Number : 06142188 **Tested** : 11 Apr 2024
Unique Number : 10966996 **Diagnosed** : 11 Apr 2024 - Don Baldrige
Test Package : MAR 2 (Additional Tests: PrtCount)

INGRAM BARGE
 900 S 3RD ST
 PADUCAH, KY
 US 42003
 Contact: RANDAL KEEN
 randal.keen@ingrambarga.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (615)695-3697