


# **OIL ANALYSIS REPORT**

Sample Rating Trend

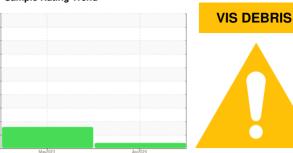

Machine Id

# **KAESER 8233418**

Component Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

## **DIAGNOSIS**

#### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

#### Wear

All component wear rates are normal.

### Contamination

Moderate concentration of visible dirt/debris present in the oil.


### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			May2023	Aprz024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA016875	KCPA001786	
Sample Date		Client Info		02 Apr 2024	04 May 2023	
Machine Age	hrs	Client Info		14464	9116	
Oil Age	hrs	Client Info		5348	0	
Oil Changed		Client Info		Changed	N/A	
Sample Status				ABNORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	<1	
Chromium	ppm	ASTM D5185m	>10	<1	<1	
Nickel	ppm	ASTM D5185m	>3	0	<1	
Titanium	ppm	ASTM D5185m	>3	<1	<1	
Silver	ppm	ASTM D5185m	>2	<1	0	
Aluminum	ppm	ASTM D5185m	>10	2	0	
Lead	ppm	ASTM D5185m	>10	0	<1	
Copper	ppm	ASTM D5185m	>50	13	5	
Tin	ppm	ASTM D5185m	>10	<1	<1	
Vanadium	ppm	ASTM D5185m		<1	0	
Cadmium	ppm	ASTM D5185m		0	<1	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	
Barium	ppm	ASTM D5185m	90	<1	0	
Molybdenum	ppm	ASTM D5185m	0	0	<1	
Manganese	ppm	ASTM D5185m		0	<1	
Magnesium	ppm	ASTM D5185m	100	17	27	
Calcium	ppm	ASTM D5185m	0	4	1	
Phosphorus	ppm	ASTM D5185m	0	2	3	
Zinc	ppm	ASTM D5185m	0	86	40	
Sulfur	ppm	ASTM D5185m	23500	21891	22133	
CONTAMINANTS	<b>,</b>	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	
Sodium	ppm	ASTM D5185m		12	13	
Potassium	ppm	ASTM D5185m	>20	8	9	
Water	%	ASTM D6304	>0.05	0.014	0.017	
ppm Water	ppm	ASTM D6304	>500	142	170.3	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647			9760	
Particles >6µm		ASTM D7647	>1300		<u>^</u> 2765	
Particles >14μm		ASTM D7647	>80		<u>^</u> 219	
Particles >21μm		ASTM D7647	>20		<u></u> 58	
Particles >38μm		ASTM D7647	>4		1	
Particles >71μm		ASTM D7647	>3		0	
Oil Cleanliness		ISO 4406 (c)	>/17/13		<b>2</b> 0/19/15	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.43	0.37	



## **OIL ANALYSIS REPORT**

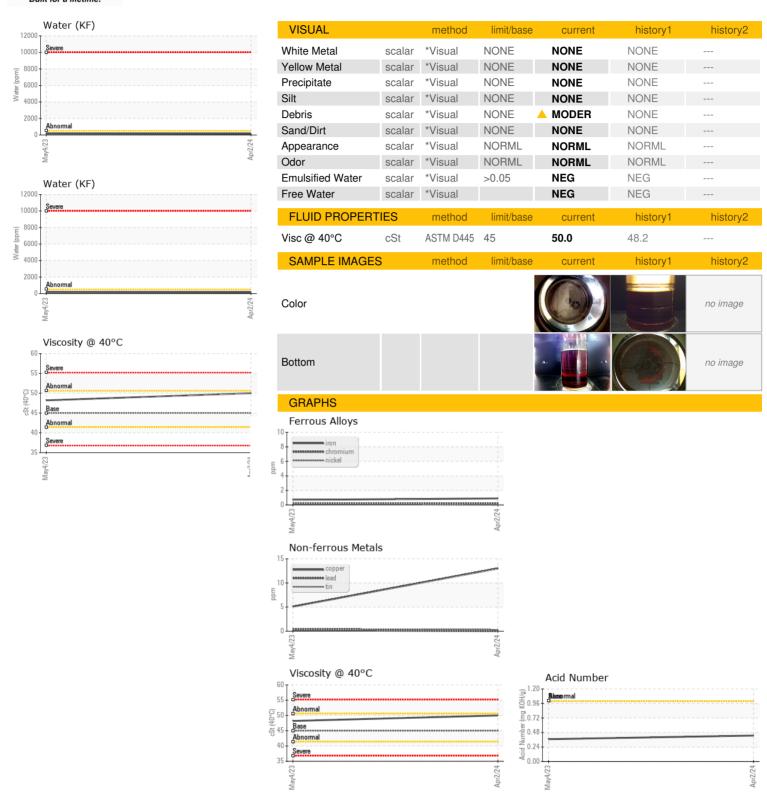





Certificate 12367

Laboratory Sample No.

Lab Number : 06142240 Unique Number : 10967048

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KCPA016875

Received **Tested** 

: 08 Apr 2024 Diagnosed Test Package : IND 2 ( Additional Tests: KF, PrtCount )

: 11 Apr 2024 : 11 Apr 2024 - Don Baldridge

OKLAHOMA CITY, OK US 73131 Contact: V. CHANOCUA vchanocua@propak.com

11300 PARTNERSHIP DR

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CHEP

T:

F: