


OIL ANALYSIS REPORT

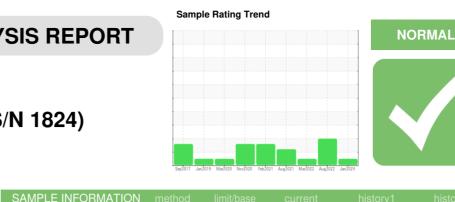

Machine Id

KAESER SK 15 5367332 (S/N 1824)

Component Compressor Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	ΜΑΤΙΟΝ	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA007379	KCP48149	KCP38394
Sample Date		Client Info		29 Jan 2024	18 Aug 2022	07 Mar 2022
Machine Age	hrs	Client Info		30448	27952	26366
Oil Age	hrs	Client Info		0	1585	3883
Oil Changed		Client Info		N/A	Not Changd	Changed
Sample Status				NORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	0	0
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	<1
Aluminum	ppm	ASTM D5185m	>10	2	<1	<1
_ead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	2	<1	2
Tin	ppm	ASTM D5185m	>10	<1	0	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	<1	11	0
Nolybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	60	82	67
Calcium	ppm	ASTM D5185m	2	4	<1	0
Phosphorus	ppm	ASTM D5185m		<1	3	3
Zinc	ppm	ASTM D5185m		7	2	6
Sulfur	ppm	ASTM D5185m		20683	18547	16492
CONTAMINANTS	\$	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	<1
Sodium	ppm	ASTM D5185m		13	11	13
Potassium	ppm	ASTM D5185m	>20	4	0	<1
Nater	%	ASTM D6304	>0.05	0.020	0.027	0.019
opm Water	ppm	ASTM D6304	>500	200	272.4	190.1
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		3462	34654	3867
Particles >6µm		ASTM D7647	>1300	932	<u> </u>	1047
Particles >14µm		ASTM D7647	>80	35	🔺 1543	68
Particles >21µm		ASTM D7647	>20	5	<u> </u>	13
Particles >38µm		ASTM D7647	>4	0	<u> </u>	0
Particles >71µm		ASTM D7647	>3	1	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	19/17/12	<u>22/21/18</u>	17/13
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN) 52:14) Rev: 1	mg KOH/g	ASTM D8045	0.4	0.39 Contact/Loca	0.35 ation: ERIC MC	0.36 COY - KROFOF


Report Id: KROFOR [WUSCAR] 06142243 (Generated: 04/12/2024 01:52:14) Rev: 1


Contact/Location: ERIC MCCOY - KROFOR





OIL ANALYSIS REPORT














Bottom

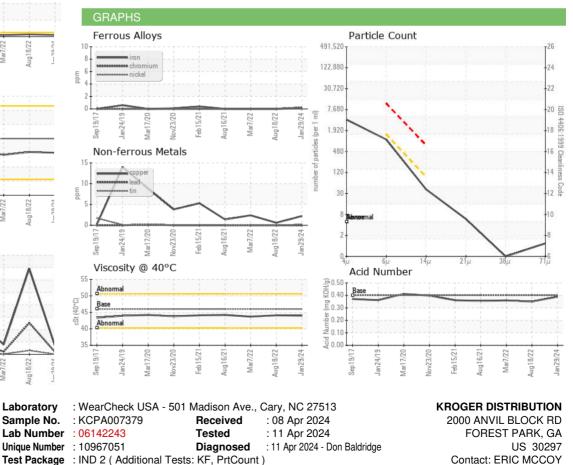

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: KROFOR [WUSCAR] 06142243 (Generated: 04/12/2024 01:52:14) Rev: 1

Certificate 12367

Contact/Location: ERIC MCCOY - KROFOR

eric.mccoy@bgdcdistribution.com

Page 2 of 2

T:

F: