


# **OIL ANALYSIS REPORT**

Sample Rating Trend



Machine Id

# **KAESER 3063556**

Component Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

### **DIAGNOSIS**

#### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil. Moderate concentration of visible dirt/debris present in the oil.


#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Apr2022	Apr2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA016163	KCP44416	
Sample Date		Client Info		03 Apr 2024	21 Apr 2022	
Machine Age	hrs	Client Info		53911	42021	
Oil Age	hrs	Client Info		0	4000	
Oil Changed		Client Info		Changed	Changed	
Sample Status				ABNORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	
Chromium	ppm	ASTM D5185m	>10	<1	0	
Nickel	ppm	ASTM D5185m	>3	0	<1	
Titanium	ppm	ASTM D5185m	>3	<1	0	
Silver	ppm	ASTM D5185m	>2	<1	<1	
Aluminum	ppm	ASTM D5185m	>10	2	0	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper	ppm	ASTM D5185m	>50	10	10	
Tin	ppm	ASTM D5185m	>10	<1	<1	
Vanadium	ppm	ASTM D5185m		<1	0	
Cadmium	ppm	ASTM D5185m		0	0	
	1-1-		limit/base		la faction and	la la tarre O
ADDITIVES		method	ilmit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	
Barium	ppm	ASTM D5185m	90	<1	<u> </u>	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m		0	0	
Magnesium	ppm	ASTM D5185m	100	2	<u> </u>	
Calcium	ppm	ASTM D5185m	0	3	0	
Phosphorus	ppm	ASTM D5185m	0	1	3	
Zinc	ppm	ASTM D5185m	0	0	0	
Sulfur	ppm	ASTM D5185m	23500	19418	14144	
CONTAMINANTS	5	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	4	
Sodium	ppm	ASTM D5185m		0	1	
Potassium	ppm	ASTM D5185m		1	0	
Water	%	ASTM D6304	>0.05	0.007	0.004	
ppm Water	ppm	ASTM D6304	>500	76	45.4	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647		26005	13974	
Particles >6µm		ASTM D7647	>1300	<u> </u>	<u>▲</u> 3824	
Particles >14μm		ASTM D7647	>80	<u>▲</u> 569	<u>▲</u> 588	
Particles >21μm		ASTM D7647	>20	<u> </u>	<u>^</u> 211	
Particles >38μm		ASTM D7647	>4	1	<b>1</b> 0	
Particles >71μm		ASTM D7647	>3	0	1	
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>22/20/16</u>	<u>19/16</u>	
FLUID DEGRADA	NOITA	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.53	0.51	



## OIL ANALYSIS REPORT

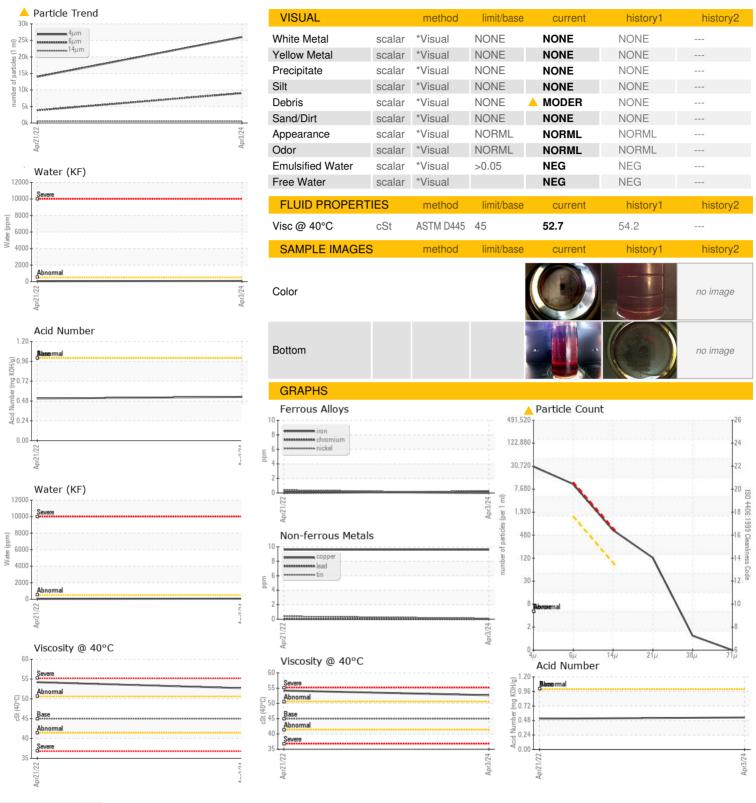



Certificate 12367

Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KCPA016163

Lab Number : 06142247 Unique Number : 10967055

Received **Tested** Diagnosed

Test Package : IND 2 ( Additional Tests: KF, PrtCount ) To discuss this sample report, contact Customer Service at 1-800-237-1369.

: 08 Apr 2024

: 11 Apr 2024

: 11 Apr 2024 - Don Baldridge

 $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CALIFORNIA WASTE SOLUTIONS** 

1005 TIMOTHY DR SAN JOSE, CA

US 95133 Contact: ANTONIO MORFIN

antoniomorfin@calwaste.com T:

F: